

**SAVONA ELITE™ CORNER WHIRLPOOL**

Comfortable two person design with molded-in back support position, dual armrests and integral seat.

- 2902E (specify White 020, Bone 021, or Linen 222)**
  - Acrylic with fiberglass reinforcement
  - 2.0 HP self-draining pump/motor with dry run seal
  - Eight multi-directional and flow adjustable jets including:
    - Three high performance Ideal-flow™ Jets
    - Five interchangeable Flex-jets™
  - Three silent air volume controls
  - Deck-mounted On/Off control
  - Complete factory installed and tested whirlpool system

- 2902EC (specify White 020, Bone 021, or Linen 222)**
  - Same as above with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®

Nominal Dimensions:

58-3/4" x 58-3/4" x 22-1/2"  
(1492 x 1492 x 572mm)

Installed Size: 82-1/2" x 69-1/2" x 22-1/2"  
(2096 x 1765 x 572mm)



**Compliance Certifications -  
Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

**Components Needed:**

- Bath Filler\*: (specify finish)
- Bath Drain: BATH-DRAIN (specify Chrome 002, Polished Brass 099, or Satin 295)


**Custom Accessories Available:**

- Pulse Jet Kit: PULSE-JET (two per kit, specify White 020, Bone 021, or Linen 222)
- Soft Jet Kit: SOFT-JET (two per kit, specify White 020, Bone 021, or Linen 222)
- E-Z-Install™ Whirlpool Heater - EZHEAT-100
- Tile Bead Kit: TILE-BEAD

**NOTE:** Roughing-in dimensions and product specifications shown on reverse side of page.

NOTE: E-Z-Install™ Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

\* See American Standard Faucet Selector

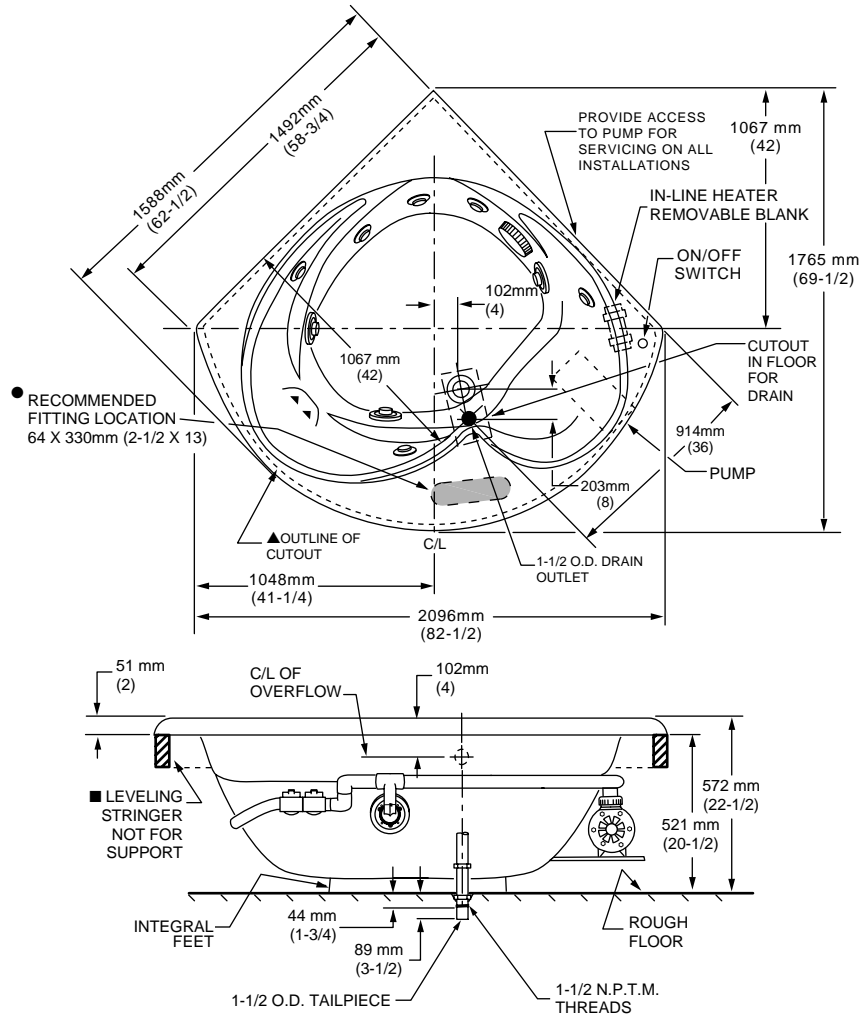

**GENERAL SPECIFICATIONS FOR 2902E WHIRLPOOL**

INSTALLED SIZE	82-1/2 x 69-1/2 x 22-1/2 In. (2096 x 1765 x 572mm)
WEIGHT	144 Lbs. (65 Kg.)
WEIGHT w/WATER	803 Lbs. (361 Kg.)
GAL. TO OVERFLOW	79 Gal. (299 L)
WHIRLPOOL MIN. OPERATING VOL.	73 Gal. (277 L)
BATHING WELL AT SUMP	38 x 30 In. (965 x 762mm)
BATHING WELL AT RIM	58 x 55 In. (1473 x 1397mm)
WATER DEPTH TO OVERFLOW	15-3/4 In. (400mm)
FLOOR LOADING (PROJECTED AREA)	33 Lbs./Sq.Ft. (165 Kgs./Sq.m)
PTS.	41.7
CUBE (FT <sup>3</sup> )	68.4

**WHIRLPOOL ELECTRICAL SPECIFICATIONS**

PUMP	2.1 HP, 14.4 AMPS, 120V.
------	--------------------------

**NOTES:**

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIALS BY OTHERS.

OPTIONAL TILING BEAD KIT No. TILE-BEAD MUST BE ORDERED SEPARATELY.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

▲ CUTOUT TEMPLATE PROVIDED IN SHIPPING BOX. MAY BE REQUESTED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING AND DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 / CSA Certified. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.