

Style That Works Better

# TROPIC CADET® 3 ELONGATED TOILET VITREOUS CHINA

## **TROPIC CADET® 3 ELONGATED TOILET**

### 2457.016

- Vitreous china
- EverClean<sup>®</sup> surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Low-consumption (6.0 Lpf/1.6 gpf)
- Features the Cadet<sup>®</sup> 3 Flushing System
- Elongated siphon action jetted bowl
- Fully-glazed 2-1/8" trapway with 2" ball pass
- Generous 9" x 8" water surface area
- Close-coupled tank with flat tank cover for superior storage
- Oversized 3" flush valve with chemical resistant flapper
- Chrome trip lever
- Speed Connect<sup>®</sup> tank-to-bowl coupling system
- Sanitary dam on bowl with four point tank stabilization
- 2 color-matched bolt caps
- 100% factory flush tested
- 5 year warranty

### **3014.016** Elongated Bowl

**4007.016** Tank

#### Nominal Dimensions:

768 x 476 x 733mm (30-1/4" x 18-3/4" x 28-7/8") Fixture only, seat and supply by others

#### Alternate Tank Configurations Available:

4007.516 Tank complete with Aquaguard Liner

## Compliance Certifications -


# Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions
- Los Angeles Department of Water and Power Supplementary Purchase Specification for Non-Adjustability

## To Be Specified:

- □ Color: □ White □ Bone □ Silver □ Linen □ Black □ Seat: #5325.010 Elongated Champion<sup>®</sup> Slow Close
- solid plastic seat and cover with easy lift off feature Seat: #5284.016 Elongated EverClean<sup>®</sup> solid plastic
- seat and cover Seat: #5321.110 EverClean<sup>®</sup> Elongated Seat with
- Slow Close Snap-Off Hinges
- Supply with stop:



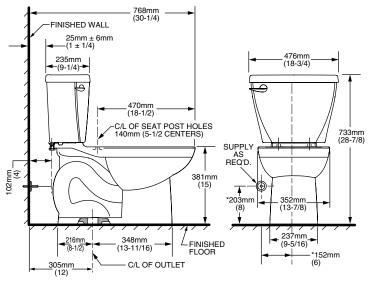

#### NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. \* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

