

Alcatel **Mobile Reflexes™**

Alcatel **OmniPCX** Office

OK



ALCATEL

ARCHITECTS OF AN INTERNET WORLD

Precautions for use

This approved DECT telephone is intended to be used with an ALCATEL cordless PBX.

The following conditions must be respected, notably concerning the use of radioelectric frequencies:

- DECT equipment can only be used to establish links between fixed points if these links are temporary and the equivalent isotropically radiated power at the antenna is less than 250 mW.
- The conditions of access to a DECT equipment telepoint network shall be stipulated by contract with the operator of the authorized telepoint network concerned.
- The mains power socket used must be close to the charger/holder and easily accessible, so that it can be used as an 'on/off' facility.
- This telephone is specially designed for use with an ALCATEL system such as is described in the manual.
- Do not expose your telephone to severe conditions (rain, sea air, dust, etc.).
- Correct operation of your telephone is not guaranteed at temperatures outside the range -10°C to +45°C.
- You must not switch on or use your telephone near gas or inflammable liquids.

Thank you for choosing the **Mobile 100** or **200 Reflexes**: this is a reliable telephone designed to make life easier.

Contents

	Precautions for use	2
	Your telephone	4
1.	Display and corresponding icons	6
	Status icons. MENU icons. Call icons. How to read this guide.	
2.	Getting started	10
	Charging the telephone. Switching on your telephone. Accessing the MENU and navigating. Accessories.	
3.	Using your telephone	12
	Making a call. Calling from your personal directory. Call correspondent by name. Answering a call. Features in conversation.	
4.	Using your voice mailbox	15
	Initializing your voice mailbox. Diverting calls to your voice mailbox. Consulting your voice mailbox.	
5.	Customizing your telephone	17
	Programming your personal directory. Activating the vibrator (Mobile 200). Rapid customizing of the ringer.	
	Guarantee and clauses	19

Headset socket

- Erase a character
- Return to previous menu
- Delete an entire field (long press)

- **Hang up**
- Return to first screen
- Switch off ringer
- Lock/unlock keypad (long press)

- **Activate/disable the vibrator**
(⁽¹⁾) (long press)

- Company directory
- Customizing your telephone (long press) (⁽²⁾)

Microphone

(⁽¹⁾) Depending on model

(⁽²⁾) Special case: from the personal directory, the long press enables a directory card to be created or modified

To find out more about this,
visit www.alcatel.com

Light

- Exit from radio field
(rapid flashing)

■ **Adjust audio volume**

■ **Access MENU**

- Navigate
- Apply

■ **Lift the receiver**

- Redial (long press)
- Broker call
(during enquiry call)

■ **Activate/deactivate
loudspeaker**

- Activate mute on hands free
charger

■ **Switch on / off**
(long press)

- Rapid access to ringer
adjustment

Display and corresponding icons

Features 1 line of status icons and 3 lines of 16 alphanumeric characters. The Mobile 200 also has a back-lit display and keypad.

1.1

Status icons

The status icons are displayed on the welcome screen and indicate the status of the telephone.



Battery charge level



Initializing the voice mailbox / Consulting information



Programmed call-back time



Call diversion activated



Vibrator active Mobile 200



Ringer active



Ringer disabled



Radio reception quality

You can obtain details on the status icons from the tooltips that appear on the welcome screen when you use the navigator:



1.2

MENU icons

The MENU is accessible from the welcome screen by pressing the **OK** key.

(OK : )

It provides access to all the functions available on your system.

**Directories:**

manage your personal directory and access the company directory.

**Redial:**

call back the last number dialled.

**Diversion:**

divert your calls to another number.

**Mailbox:**

consult and send voice and text messages.

**Call pick-up:**

answer a call intended for another telephone.

**Appointment:**

program a call-back time.

**System lock:**

prohibit outgoing calls and modification of the programming.

**Customizing the telephone:**

program your voice mailbox, select the ringer tune, language, etc.

**Adjustment:**

adjust contrast, activate or deactivate the beeps, lighting, etc.

**System selection****Installation**



Making a call



Answering a call*



In conversation*



Call on hold*



Accessing the directories



Transferring a call



Switching to DTMF signals



Setting up a conference



Putting on common hold



Parking an external communication

* In the event of a multiple call, the icons are given indices to represent the different correspondents.

1.4

How to read this guide



Press briefly on the navigation key to access the MENU and to confirm.



Move the navigation key up or down.



Move the navigation key to the left or right.



Use the keypad to enter digits and letters.



Description of an action or context




Important information.


These symbols can be supplemented by small icons or texts. All default or customized function codes are given in the table of codes in the appended sheet.

2.1 Charging the telephone

• Install the battery




Position the battery in the slide following the mark on the label




Slide it until it clicks into place



• Charge battery



Connect the charger and place the telephone in the charging holder



Battery charging time
Mobile 100: ~ 5 h 00
Mobile 200: ~ 3 h 00
Additional battery: ~ 2 h 30

Characteristics of the mains power adapter

Entry : 230 V - 50 Hz

Output: 12 V DC - 500 mA

Charge the telephone regularly. The telephone can be switched on or off.

If the telephone is not used and not charged for a period of several weeks, remove its battery and store it separately.

The **Mobile 100** functions exclusively with the Ni-Mh battery, and the **Mobile 200** with the Li-Ion battery.

2.2

Switching on your telephone



Switch on
(long press)

Wait a moment
(about 3 seconds)

Your telephone is
switched on

- **Switch off your phone**

Press the **switch on/off** key (long press).

(switch on/off : )

2.3

Accessing the MENU and navigating



Confirm

- **Access the functions**



Select a function in the
MENU

Confirm

You can move horizontally
along the various icons within
the function

2.4


Accessories

Several charger models are available. There are various protective holders available. Ask your engineer.

For operation in an industrial environment (dust, filings, various types of vapour and risk of impact), it is essential to use the protective holders

3.1


Making a call



To make an external call, dial the outside line access code before dialling your correspondent's number.


3.2

Calling from your personal directory (Individual number)

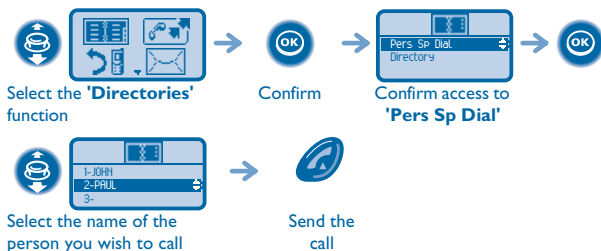

3.3

Call correspondent by name

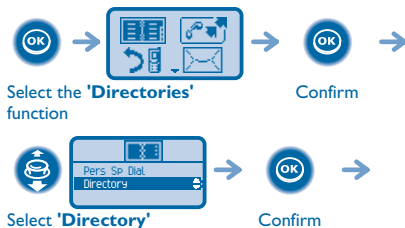



Enter the first letter of your correspondent's surname*



Select the desired name




Send the call

If several names come up, you can refine the search by entering the successive letters (second, third, etc.) of the name you are looking for. Press **I** when you do not know one of the letters of the name.

3.4

Answering a call



You are receiving a call



Off-hook



Speak



Hang up

The ringer does not ring if:




. the vibrator is active, the vibrator active icon is displayed on the screen saver.

. the ringer is disabled, the ringer disabled icon is displayed on the screen saver.

3.5 Features in conversation

• Make a second call




Hang up the ongoing call

The first correspondent is placed on hold

• Switching between calls (broker call)

During a call, to recover the correspondent on hold:




• Transferring a call



Confirm the 'Transfer' option

You are in conversation with the destination number

4.1 Initializing your voice mailbox

You can use the **Voice mailbox initialization** icon on the welcome screen to initialize your voice mailbox. (Voice mailbox initialization : )




Enter your password and record your name in accordance with the spoken instructions




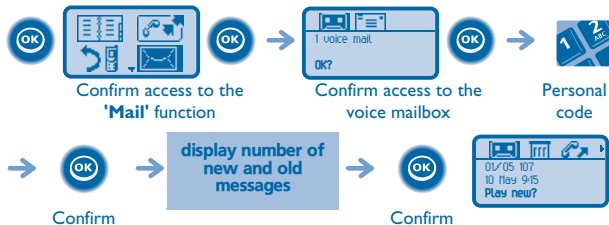
Your personal code is used to access your voice mailbox and to lock your telephone.

4.2 Diverting calls to your voice mailbox




4.3 Consulting your voice mailbox

When you have received a message, the **Voice mailbox initialization** icon is displayed on the welcome screen. (Voice mailbox initialization : )



• To access voice mail functions


You can move horizontally along the various icons.

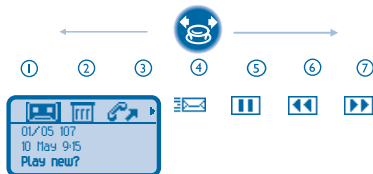

- ① Listen to the messages
- ② Erase the current message
- ③ Call back the person who left the message
- ④ Send a copy of a message
- ⑤ Pause while listening to the message
- ⑥ Go back 10 seconds
- ⑦ Go forward 10 seconds

5.1 Programming your personal directory (Individual number)


Your personal directory can contain up to 10 numbers.

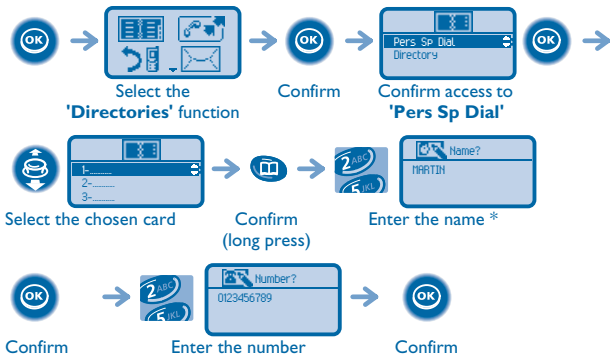

* To enter the name: the numeric keys have letters which can be obtained by consecutive presses.

Example : press the **8** key twice in succession to display the letter 'U'.

5.2 Activating the vibrator (Mobile 200)

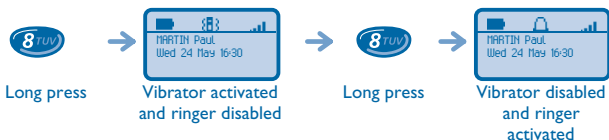


This key can be used to switch rapidly from the ringer to the vibrator and vice-versa.

5.3

Rapid customizing of the ringer

Depending on your activity, the ringer settings can be modified via a quick press on the **switch on/off** key followed by the **OK** key.

(switch on/off : ①, OK : OK)



- ① **Switch off the telephone**
- ② **Activate/disable the vibrator (Mobile 200)**
- ③ **Activate/disable the ringer**
- ④ **Activate/disable meeting mode (progressive ringing)**
- ⑤ **Lock the keypad**

Confirm the option of your choice using the **OK** key. (OK : OK)

Guarantee and clauses

Independently of the legal warranty that covers this appliance, it is guaranteed for 1 year, parts and labour, counting from the date indicated on your invoice.

Nevertheless, if the legal warranty in effect in your country exceeds 1 year, then the legal warranty is the sole warranty applicable.

The invoice will be demanded if making a claim under the warranty. The warranty does not however apply in the following cases: in the event of use that does not comply with the instructions given in this user's manual, faults or damage caused by natural wear, damage resulting from a cause external to the appliance (e.g. impact, fall, exposure to dampness, etc.), noncompliant installation or modifications or repairs carried out by people who are not approved by the manufacturer or retailer.

No guarantee is given concerning possible interference affecting DECT equipment, due to other authorised utilisation of the radio frequencies concerned.

Declaration of compliance


We, Alcatel Business Systems, hereby declare that we assume the **Alcatel Mobile 100 Reflexes**, **Alcatel Mobile 200 Reflexes** and **Alcatel Mobile 200 Ex Reflexes** to be compliant with the essential requirements of Directive 1999/5/CE of the European Parliament and Council. This equipment uses the DECT harmonised frequency spectrum and can be used in all the countries of the European Community, Switzerland and Norway.

Any unauthorised modification to the product shall render this declaration of compliance null and void. A copy of the original of this declaration of compliance can be obtained by post from :

Alcatel Business Systems - Technical Services - Approvals Manager

I, route du Dr. Albert Schweitzer - F 67408 Illkirch Cedex - France

The CE marking indicates that this product complies with the following EC directives

- | | | |
|---|---|--|
|  | - | 89/336/CEE (electromagnetic compatibility) |
| | - | 73/23/CEE (low voltage) |
| | - | 199/5/CE (R&TTE) |

Some of your telephone's functions require a software key or are only accessible once programmed by your installation technician.

Copyright © ALCATEL. 2001. All rights reserved.

Alcatel Business Systems, in keeping with its policy of constant product improvement for the customer, reserves the right to modify product specifications without prior notice.

Alcatel Business Systems - 32, avenue Kléber, F-92707 Colombes Cedex
R.C. Paris 602 033 185

3EH 21044 BSAA Ed.01