


Legend™ 1200E Wash

SPECIFICATIONS & FEATURES

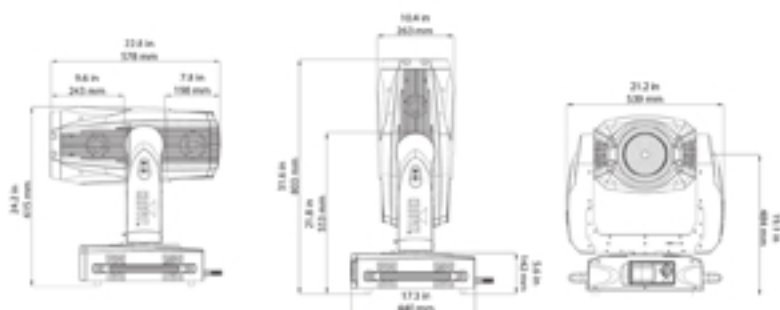

AT A GLANCE:

Color Mixing



Color Wheel 1



Color Wheel 2



Key Features:

- CMY Color Mixing
- Variable CTC filter
- Fast, linear zoom
- 3 & 5 pin DMX connections
- 1200 W FastFit™ Lamp
- Remote Reset
- Move-In-Black
- 2 additional color wheels
- Electronic ballast & power supply

About this light:

The Legend™ 1200E Wash is a 16 or 21 channel moving yoke wash fixture powered by the Philips 1200 W FastFit™ lamp. The luminaire features full CMY color mixing, with variable CTC and an 2 additional 7 slot color wheels.

Perfectly suited for touring or installation the Legend™ 1200E Wash is the complement to the new Legend™ 1200E Spot. Packed with just about every feature a designer could look for from a fast, tight zoom to smooth color mixing. The fixture is fully electronic to save on weight and has a fully featured, easy to read LCD display with unit control parameters and diagnostics.

DETAILED SPECIFICATIONS:

CONTROL FEATURES

- 16 or 21-channel fully electronic 1,200-watt moving yoke wash
- Pan: 540°
- Tilt: 270°
- Color wheel 1: 7 colors + white
 - Split/linear colors
 - Rainbow spin at variable speed
- Color wheel 2: 7 colors + white
 - Split/linear colors
 - Rainbow spin at variable speed
- Variable CTC filter (3,200 K ~ 6,000 K)
- CMY color mixing system with vector speed adjustments
- Variable shutter
- Variable 16-bit dimming (0 ~ 100%)
- Linear zoom (5.6° ~ 20.75°)
- Individual reset of pan/tilt, color, gobo, shutter, prism, focus
- Remote fixture reset, lamp on/off and vector speed adjustments
- Built-in movement macros with range adjustments
- Built-in color macros

ADDITIONAL FEATURES

- 3-pin and 5-pin DMX connections
- User-configurable lamp ignition delay
- User-configurable maintenance reminder
- Electronic ballast with power factor correction
- Electronic power supply
- Automatic pan & tilt correction
- Pan & tilt locks
- Lamp & fixture use timers
- Power saver mode

SPECIFICATIONS

- Beam Angle: 5.6° ~ 20.75°
- Lux: 84,000 @ 4 m, 5.6° zoom
6,680 @ 4 m, 20.75° zoom
- Light source: Philips MSR Gold 1200SA/SE FastFit™ 6,000 K, 750 hrs
Osram HTI 1500 W/60/P50 Lok-It™ 6,000 K, 750 hrs
GE CSR 1200/SA/TAL 5,800 K, 750 hrs
- Power and current: 208 V, 60 Hz; 1,604 W, 7.86 A (operating),
4.3 A (inrush), PF 0.92
230 V, 50 Hz; 1,584 W, 7.11 A (operating),
3.8 A (inrush), PF 0.92
- AC power: Auto-ranging 200 ~ 240 V, 50/60 Hz
- Weight: 79.75 lbs / 36.17 kg
- Size: 20.5 x 21.2 x 31.6 in / 521 x 539 x 803 mm

www.chauvetlighting.com

info@chauvetlighting.com

t: 954.929.1115

3000 North 29th Court

Hollywood, FL 33020

