## DESCRIPTION

498-RP-TR features a 24" Luminous Hand Crafted Textured Glass Pendant designed for low ceiling applications with C82428350 horizontal downlight by Portfolio(TM).

	snapenighting.com
Catalog #	Туре
Project	
Comments	Date
Prepared by	

## SPECIFICATION FEATURES

#### Material

Pendant: 24" Dia. textured bowl, hand-crafted, Kokomo art glass. Hand fused to an opaque white glass for structure and lamp uniformity. Solid brass, cold-rolled steel or aluminum cable finials or trim ring. Solid aluminum mounting ring and hardware with cable and four aircraft cable attachments.

Downlight: Portfolio(TM) one piece precision die cast aluminum 1-1/2" deep collar accommodates varying dimensions of ceiling materials. Precisely formed one piece, clear Alzak®, non-imaging optical reflector ensures 55° cut-off to lamp and lamp image.

#### **Finish**

Finials/Trim

Standard: Matte White (MW)
Premium: Natural Aluminum (NA)
[Sustainable Design], Lacquered
Satin Aluminum (SAL), Satin
Chrome (SCL), Polished Chrome
(PC), Satin Nickel (SN), Lacquered
Satin Nickel (SNL), Polished Nickel
(PN), Oxidized Brass (OBRS), Satin
Brass (SB), Polished Brass (PB),
Satin Copper (SCP), Polished
Copper (PCP), Oxidized Copper
(OCP), Gun Metal (GNM),

## Finish (Con't.)

or Custom Colors (CC). Contact factory for damp location.

Glass Colors: Textured Warm White Glass (WG) or Textured Carmel Swirl Glass (CG).

## **Optics**

Refer to www.shaperlighting.com for complete photometrics.

#### Ballast

One (1) integral, multi-voltage (120V/277V), electronic CFL (347V Canada) ballast for a 26W, 32W or 42W CFL lamps. Provides flicker free and noise free operation and starting.

## Lamp/Socket

Two (2) 26W, 32W (GX24q-3) or 42W (GX24q-4) 4-pin triple CFL lamps. Universal 4-pin CFL socket injection molded plastic with fatigue free stainless steel lamp spring ensures positive lamp retention. Lamps furnished by others.

## Installation

Decorative trim/finial/bowl assembly is securely suspended from the mounting ring by four stainless steel cables (provided). Listed for eight #12AWG (four in, four out) 90°C conductors feed

## Installation (Con't.)

through branch wiring. One 1/2" and two 3/4" pry outs. Positioned to allow straight conduit runs. Access to junction box by removing reflector. Accepts 1/2" EMT, C Channel, T-bar fasteners, and bar hangers. Adjusts 5" vertically from above or below ceiling. Positive reflector mounting, without tools, pulls trim tight to ceiling. No measuring, cutting or adjustment of cables is required to achieve standard overall height and level mounting. Contractor to provide appropriate structural support for the fixture's weight.

## **Options**

Refer to the downlight spec sheet for options, MH Lamping - Contact factory.

## Labels

U.L. and C.U.L. listed. Downlight is standard damp label.

## Modifications

Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors, or decorative detailing.




# 498-RP-TR SERIES

Shaper

Recessed Pendant Luminaire Luminous Hand-Crafted, Textured Glass Bowl




## ORDERING INFORMATION

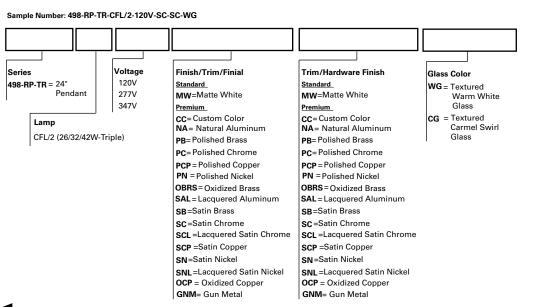



Shaper has a long-standing history of offering environmentally-friendly fixtures. The copper and bronze alloys used in our exterior luminaires feature up to 98% recycled content, contribute less undesirable air emissions compared to painted aluminum and are easy to recycle.

Refer to the Icon Legend Link on shaperlighting.com.



498-RP-TR

# TEXTURED GLASS STANDARD





Textured Warm White Glass - (WG)

Textured Carmel Swirl Glass (CG)