


DIMENSIONS




DESCRIPTION

The Lumark Glass-Pak is constructed of premium die-cast aluminum and features a borosilicate glass lens. U.L. listed for wet locations. CSA certified.

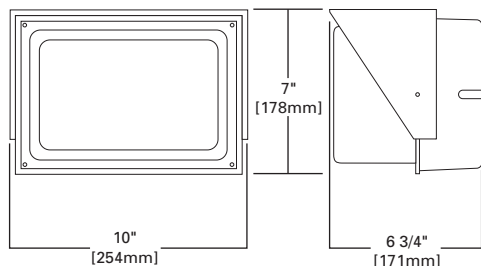

MOUNTING DETAIL

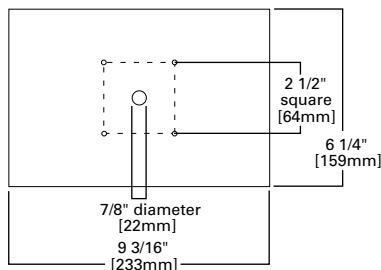

ORDERING INFORMATION

SAMPLE NUMBER: MHGP-175H-MT-LL

Lamp Type HP=High Pressure Sodium MH=Metal Halide	Series GP=Glass-Pak	Lamp Wattage ¹ 35=35W ² 50=50W 70=70W 100=100W 150=150W 175=175W	Power Factor _ =NPF H=HPF	Voltage ³ 120V 208V 240V 277V 347V 480V ⁴ DT=Dual-Tap ⁵ MT=Multi-Tap ⁶ TT=Triple-Tap ⁷	Options & Accessories (See Below)
--	-------------------------------	---	--	---	---

GP GLASS-PAK

35 - 175 W

High Pressure Sodium Metal Halide

WALL MOUNT LUMINAIRE

- Die-cast aluminum housing finished in architectural dark bronze polyester powder coat
- Precision aluminum reflector/visor system directs light down and out, eliminating glare and wasted light
- Optical system is sealed with foam-in-place silicone gasketing
- Can be mounted to any vertical surface. 1/2" knockouts on side of housing accommodate surface-mounted conduit, or back plate can be mounted to 4" octagonal J-box
- Prismatic borosilicate glass refractor provides excellent beam distribution without lens yellowing
- U.L. listed for wet locations. CSA certified
- Approximate net weight: 18 lbs. (8 kgs.)

Options *

F1=Single Fuse (120, 277 or 347V)
F2=Double Fused (208, 240 or 480V)
PE=Internal Photocontrol
TR=Tamper Resistant Screws
LL=Lamp Included †
WHT=White Finish

Accessories †

PE/MT=Field Installed Photocontrol (Specify voltage)
TRSD-8/32=Tamper-Resistant Screwdriver
PE-480V=480V Photoelectric Control
PE-347=Field Installed Photocontrol, 347V
UB-U Universal BKT=Universal Mounting Bracket
WG/GP-GS=Wire Guard

LAMP TYPE	WATTAGE
Metal Halide	50, 70, 100, 150W
High Pressure Sodium	35, 50, 70, 100, 150, 175W

NOTES: 1 All lamps are medium-base. 2 35W is HPS only, 120V only. 3 Products also available in non-US voltages and 50Hz for international markets. Consult factory for availability and ordering. 4 480V not available in 35 or 50W. 5 Dual-Tap ballasts are 120/277V wired 277V. 6 Multi-Tap ballasts are 120/208/240/277V wired 277V. 7 Triple-Tap ballasts are 120/277/347V wired 347V. 8 Add as suffix in the order shown. 9 Lamp is shipped separate from luminaire. Lamp is Cooper designated product based on luminaire requirements. Specified lamps must be ordered as a separate line item. 10 Order separately. 11 Consult your Cooper Lighting Representative for availability and ordering information. 12 Specifications and dimensions subject to change without notice.