

DESCRIPTION

New construction housing for Mini Accurus small aperture round trims (ACM5001, ACM5002, ACM5003, ACM5004).

For new construction applications. Insulation must be kept 3" from all sides and at least 1" above the housing.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A...Housing

Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable plaster frame can accommodate up to 1" ceiling thickness.

B...System Protection:

Thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation.

C...Electrical

Integral j-box and metal halide ballast. 120V input. Junction box is U.L. listed for through branch wiring. Includes five 1/2 trade size knockouts (six knockouts when magnetic xfmr. is specified)


D...Lamp

CMH MR16 20W or ES16 BriteSpot 39W (not included). Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. GX10 twist lock socket.

E...Mounting

Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively.

Ceiling Cut-Out: 3.63" dia.

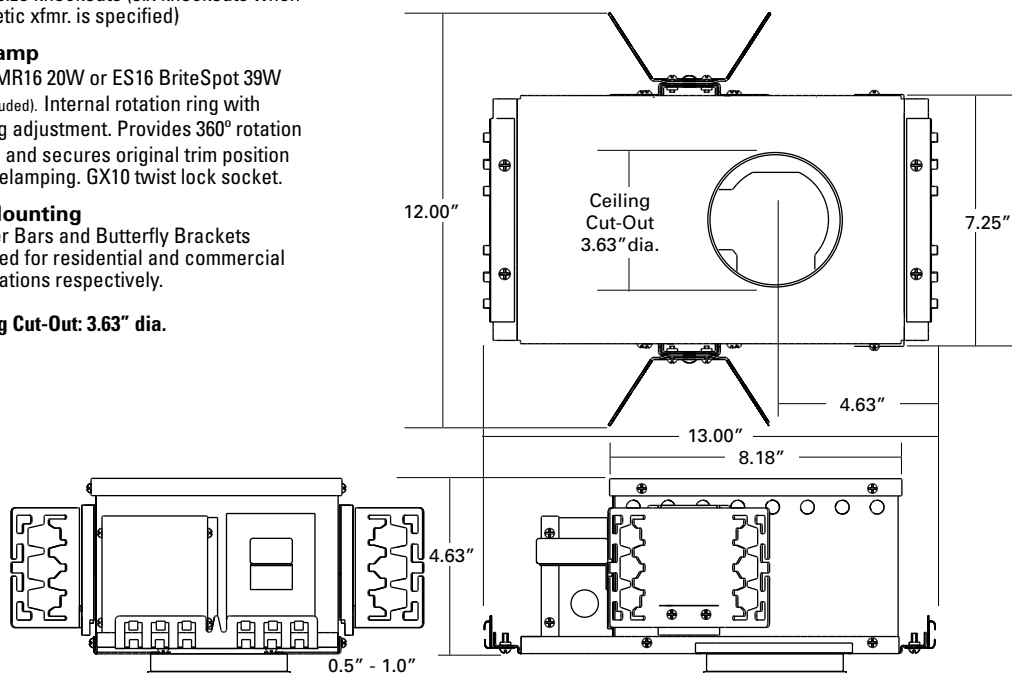

**MINI
ACCURUS**

ACM500MH

**New Construction
Housing
for Round Trim**

**FOR CMH MR16 20W
or ES16 BriteSpot 39W**



ORDERING INFORMATION

ACM500MH		
Housing ACM500MH = Mini Accurus New Construction Housing for Round Trim w/ Integral Ballast	Metal Halide Ballast 20 = CMH MR16 20W 39 = ES16 BriteSpot 39W	Voltage 120 = 120 volts primary 277 = 277 volts primary*

* Consult factory for 277V ballast availability.