

DESCRIPTION

Remodel housing for 5" Accurus round trim. For 12V MR16 50 watts max.

For remodel applications in existing ceilings. Insulation must be kept 3" from all sides and at least 1" above the housing.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A...Housing

White housing with structural steel arm and wireway. Connected to integral j-box.

B...System Protection:

Thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation.

C...Electrical

Integral j-box and electronic or magnetic low voltage transformer. 120V or 277V input, 12V output. Junction box is U.L. listed for through branch wiring. Includes two 1/2 trade size knockouts.


D...Lamp

12V MR16 50 watts max. (not included)
"POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.

E...Mounting

Supplied with 3 (three) spring loaded mounting clips. May accommodate 1/2", 1", or 1-1/2" ceiling thickness. Includes adjustable leveling screw.

Ceiling Cut-Out: 4.18"

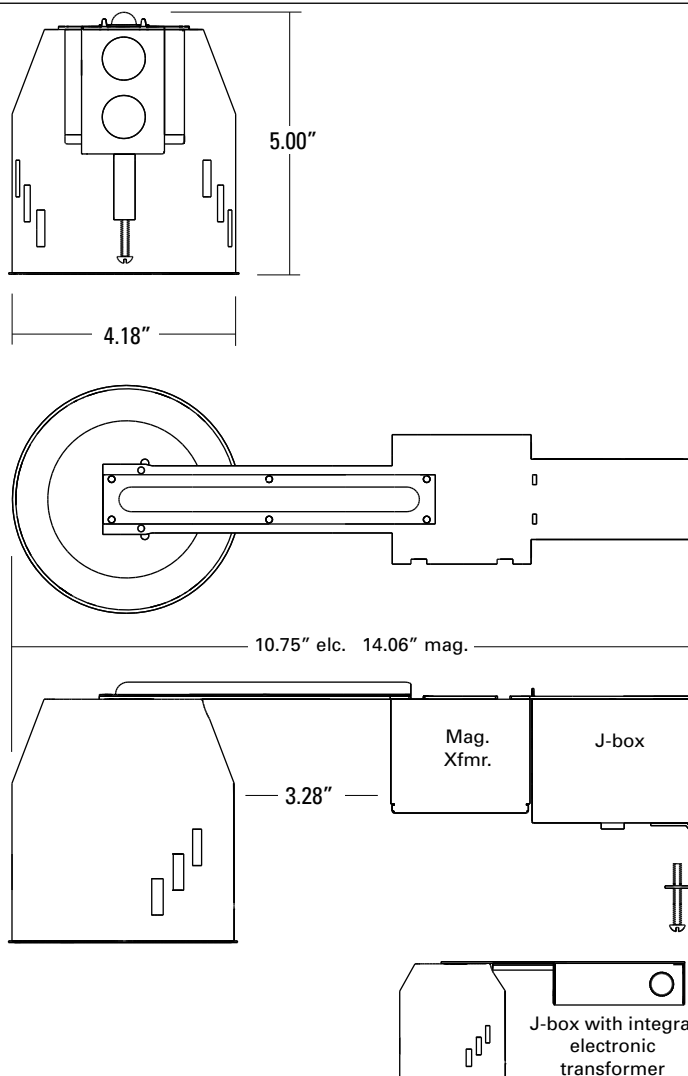

ACCURUS HOUSING

ACT954RM Remodel Housing for Round Trim

Integral Electronic or Magnetic Transformer

FOR 12V MR16 50 watts max.



ORDERING INFORMATION

ACT954RM		
Housing ACT954RM = Accurus Remodel Housing for Round Trim w/Integral Transformer	Transformer ELC = Electronic MAG = Magnetic	Voltage 120 = 120 volts primary 277 = 277 volts primary