



LZ160-USB/WDP Laser Scanner Specifications

Model	Description	Interface	Cable
LZ160-USB	Integrated USB Laser Scanner	USB HID Keyboard	C40 USB Cable
LZ160-WDP	Integrated Keyboard Laser Scanner	Keyboard 6-Pin Mini Din	C41 Keyboard Y-Cable

Operational

Light Source	650 nm 0.7mW Laser Diode
Scan Speed	48 ± 2 scans/sec
Scan Angle	53° ± 2°
Minimum Bar Width	3.5 mil - .0035" (0.089mm)
Print Contrast	20% minimum reflectance differential
Indicators (LED)	Bi-Color LED - Green/Decode Orange/Scan
Beeper Operation	5 Tones plus OFF
System Interface(s)	USB HID Keyboard or Keyboard Wedge
Operating System	Windows® 7, Vista, XP, NT, 2000, 98SE, Mac OS
Bar Codes Supported	Code 39, Full ASCII Code 39, UPC-A, UPC-E, EAN-13, EAN-8, ISBN, Code 93, 2 of 5 Standard, Interleaved 2 of 5, Codabar, Code 128, GS1 Data Bar (RSS-14), UCC/EAN 128, MSI, Plessey

Physical


Height	5.6" (142mm)
Depth	4.7" (119mm)
Width	3.1" (79mm)
Weight	8.8 oz - 249g
Cables	C40 USB 6' (1800mm) Straight Cable or C41 Keyboard Wedge 6' (1800mm) Y-Cable

Power

Input Voltage	5VDC ± 10%
Power (nominal)	25mA Idle, 93mA scanning
Laser Class	CDRH class II
EMC	FCC part 15 class A

Environmental

Operating Temperature	14°F to 122°F (-0°C to 50°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Humidity	5% to 95% non-condensing
Ambient Light Immunity	Sunlight: 8,000 ft. candles - Indoor: 450 ft. candles
Shock	5' drop to concrete
Warranty	2 Years - Parts & Labor

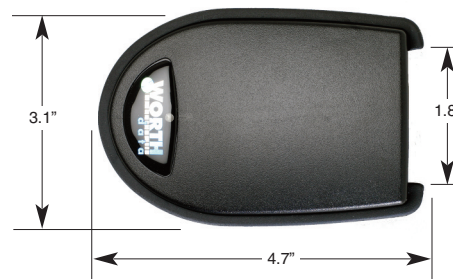


C41 6 pin mini-din PC Keyboard Y Cable



C40 USB Cable for PC or Mac

Scan Range for LZ160-USB & LZ160-WDP

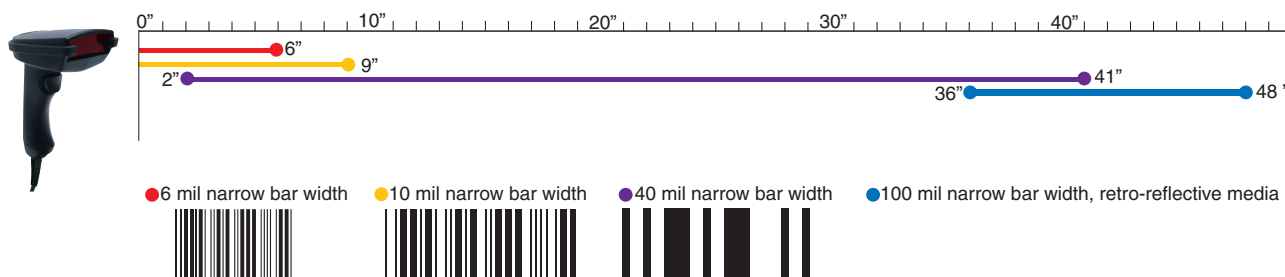

Worth Data Inc. USA
 623 Swift St.
 Santa Cruz, CA 95060
 tel. 831-458-9938 or 800-345-4220
 fax. 831-458-9964

<http://www.worthdata.com>
 email. wds@barcodehq.com



LZ160 Integrated USB/Keyboard Laser Scanner