

# High-Power 20A GMT Series Fuse Panels

Power :: 20HPGMTXX

User Manual

---



Applies to : 20HPGMT05R :: 20HPGMT05FR :: 20HPGMT05FSR :: 20HPGMT05BNR :: 20HPGMT12R-75 ::  
20HPGMT03R :: 20HPGMT02R

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

---

## Table of Contents

|                                                         |    |
|---------------------------------------------------------|----|
| 1.1 Overview .....                                      | 1  |
| 1.1.1 Specifications .....                              | 2  |
| 1.1.2 Standard & Special Features .....                 | 5  |
| 1.1.2.1 Bay & Failure Alarm Options .....               | 6  |
| 1.1.2.2 Fail-Safe Circuit .....                         | 7  |
| 1.1.2.3 Power-Line Noise Filter .....                   | 7  |
| 1.2 Installation .....                                  | 8  |
| 1.2.1 Rack-Mounting Conditions and Considerations ..... | 8  |
| 1.2.2 Inspection .....                                  | 8  |
| 1.2.3 Installing the Panel .....                        | 9  |
| 1.2.4 Replacing the Alarm Board .....                   | 13 |
| 1.3 Service .....                                       | 13 |
| 1.3.1 Owner Maintenance .....                           | 13 |
| 1.3.2 In-Warranty Service .....                         | 14 |
| 1.3.3 Out-Of-Warranty Service .....                     | 14 |
| 1.3.4 Repacking for Shipment .....                      | 14 |
| 1.4 Parts & Accessories.....                            | 14 |
| 1.5 Diagrams .....                                      | 16 |
| 1.5.1 Block Diagram.....                                | 16 |
| 1.5.2 1RU Dimensions .....                              | 17 |
| 1.5.3 2RU Dimensions .....                              | 18 |
| 1.6 Certificate of Conformity .....                     | 19 |

## List of Figures

|                                                               |    |
|---------------------------------------------------------------|----|
| Figure 1 - 20HPGMT05BNR (1RU Panel) Front and Rear View ..... | 1  |
| Figure 2 - 20HPGMT12R-75 (2RU Panel) .....                    | 1  |
| Figure 3 - Model 20HPGMT05R (Front View) .....                | 2  |
| Figure 4 - Alarm Panel .....                                  | 5  |
| Figure 5 - Model 20HPGMT05BNR (Rear View) .....               | 5  |
| Figure 6 - Standard Alarm Hookups .....                       | 6  |
| Figure 7 - Alarm Hookups .....                                | 6  |
| Figure 8 - Mounting Dimensions .....                          | 9  |
| Figure 9 - Ground Lug Connection .....                        | 10 |
| Figure 10 - Compression Lug Inputs .....                      | 10 |
| Figure 11 - Replacing the Alarm Board .....                   | 13 |
| Figure 12 - Power, Battery Return and Fuse Circuit .....      | 16 |

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## 1.1 Overview

Telect's High-Power 100A GMT Series Fuse Panels provide protected secondary distribution of -48 VDC power to telecommunications equipment at the bay level. Fuse panels are available for GMT outputs up to 20A per position in dual-circuit (10/10 and 15/15) panel configurations.

### Standard features include

- Dual-circuit, 100A input buses, -48 VDC
- Discrete GMT fuse positions: 20A capacity without fuse management for heat dissipation
- Alarm circuit board replaceable with panel in service (hot-swap)
- Minimal rack space: one, 1.75"
- EIA or 2" WECC rack unit (1RU) for rear access connections; 2RU for total front access of dual-circuit 10/10 configuration
- 19" or 23" rack mounting, with mounting brackets provided.
- Transparent terminal cover meets electrical and equipment safety standards.
- Dummy GMT fuses are provided for all fuse holders.
- Holes provided in chassis for inserting colored fuse designation pins
- All 20HPGMT panels are NEBS (Level 3).
- Fire rating: UL 94V-0 and/or VW-1 (for wiring)
- All models except 20HPGMT05R are recognized by UL for USA and Canada. 20HPGMT05R is UL listed for USA and Canada.
- 20HPGMT05FSR supports common returns



Figure 1 - 20HPGMT05BNR (1RU Panel)  
Front and Rear View



Figure 2 - 20HPGMT12R-75 (2RU Panel)

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## Special features include

- Bay Alarm Circuitry (20HPGMT05BNR)
- Fail-Safe Circuitry (20HPGMT05FR and 20HPGMT05FSR only): load sharing permits either feed to power all loads if the other feed fails.
- Noise Filter Circuitry (20HPGMT05BNR)

Telect's High-Power GMT Series Fuse Panels use discrete, not modular, GMT fuse holders, to limit heat buildup when using 15A and 20A GMT fuses.

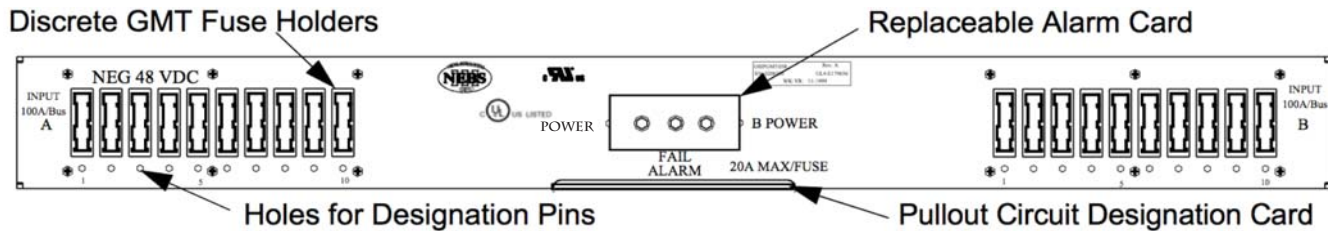


Figure 3 - Model 20HPGMT05R (Front View)

## 1.1.1 Specifications

| Environment:      | Specifications:                        |
|-------------------|----------------------------------------|
| Temperature range | -5°C to 55°C (-23°F to 131°F)          |
| Humidity          | 5% to 85% and noncondensing            |
| Altitude range    | -197 ft to 13,100 ft (-60 m to 4000 m) |
| Acoustic noise    | 0 dBA above ambient                    |

| Fit & Finish                                | Specifications:                                                                                                   |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Material<br>(Custom color/finish available) | Cold-rolled steel, powder-coat telephone grey, baked polyurethane. Clear polycarbonate protective terminal cover. |

| Weights (Approximate) | Specifications:                                 |
|-----------------------|-------------------------------------------------|
| Weight                | 8 to 12 lb (~3.5 to 5.5 kg), depending on model |

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

| Mechanical Interface:                            | Specifications:                                                                                                                                                                                                                                                                         |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input terminals — Compression                    | Stud: 1/4-20 with nut. (Use 7/16-in. [12 mm] socket.)<br>Lugs: Dual-hole compression lug (5/8 in. center to center). 0.516 in. (13.4 mm), max. lug width<br>Cable: Up to 1/0 AWG copper, depending on input interruption device<br>Torque: 62 in.-lb (~6.8 N•m), max.                   |
| Output terminals —<br>Wire binding / Compression | Screw: #6 Phillips* panhead<br>Wire: 14 to 22 AWG, copper wire Lug: 10 to 22 AWG, copper wire<br>Spacing: 3/8 in. (9.5 mm) centerline with barrier distance of 0.260 in. (6.6 mm)<br>Torque: 9 in.-lb (~1.0 N•m), max.                                                                  |
| Alarm terminals — Wire Wrap                      | 0.045 in. square wirewrap pins on 0.156 in. centers. Use 18 to 22 AWG copper                                                                                                                                                                                                            |
| Ground terminals                                 | Screws: 2, #10 Phillips* panhead<br>Lugs: Single- or dual-hole compression lug (5/8 in. center to center). Dual-hole lug is recommended.<br>Cable: Up to #6 AWG copper for single-hole lug (Conductor size depends on input interruption device.)<br>Torque: 21 in.-lb (~2.5 N•m), max. |
| * Screws with cross-recessed heads               |                                                                                                                                                                                                                                                                                         |

| Dimensions:                                                     | Specifications:                                                                |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------|
| Dimensions (nominal) without brackets for all but 20HPGMT12R-75 | Width: 17 in. (432 mm)<br>Height: 1.75 in. (44.4 mm)<br>Depth: 12 in. (305 mm) |
| Dimensions (nominal) without brackets for 20HPGMT12R-75         | Width: 17 in. (432 mm)<br>Height: 3.5 in. (89 mm)<br>Depth: 7.5 in. (190 mm)   |
| † See Pages 17 and 18 for exact dimensions.                     |                                                                                |

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

| Electrical Interface:                                       |                                                        | Specifications:                                                                                                                                                  |
|-------------------------------------------------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating voltage                                           |                                                        | -48 Vdc, both sides                                                                                                                                              |
| Current capacity                                            | All Except 20HPGMT05FR<br>20HPGMT05FSR<br>20HPGMT05BNR | 100A per bus (200A total for dual-circuit panels), max.                                                                                                          |
|                                                             | 20HPGMT05FR<br>20HPGMT05FSR                            | 150A max. total (recommended 75A max. per bus)                                                                                                                   |
|                                                             | 20HPGMT05BNR                                           | 75A per bus (150A total for both buses)                                                                                                                          |
|                                                             |                                                        |                                                                                                                                                                  |
| Fuse capacity:                                              |                                                        | 20 or 30 (total, both circuits)                                                                                                                                  |
| Maximum input interruption device rating                    |                                                        | <ul style="list-style-type: none"><li>• 125A for all models except those with noise filters and fail safe.</li><li>• 90A for models with noise filters</li></ul> |
| Maximum output interruption device rating                   |                                                        | 20A GMT fuse                                                                                                                                                     |
| Interrupt rating                                            |                                                        | 450A                                                                                                                                                             |
| Short circuit withstand current                             |                                                        | 450A                                                                                                                                                             |
| Alarm contact relay                                         |                                                        | 2A                                                                                                                                                               |
| Alarm board power rating @ 48 Vdc                           |                                                        | 1W                                                                                                                                                               |
| Panel heat dissipation per 100A bus @ % load                |                                                        | 1.0W (3.4 Btu/hr) @ 0%<br>1.2W (4.1 Btu/hr) @ 25%<br>4.8W (16.5 Btu/hr) @ 50%<br>11.4W (38.7 Btu/hr) @ 75%<br>21.3W (72.6 Btu/hr) @ 100%                         |
| Percentage of full load heat dissipation at nominal voltage |                                                        | less than 1% of total load wattage                                                                                                                               |

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## 1.1.2 Standard & Special Features

GMT fuses are available in capacities ranging from 0.18A to 20A. A unique feature of the Telect High-Power GMT Fuse Panel is that the fuse positions are oriented so the identification flags face down to provide easy location of a blown fuse when the panel is at the top position of a relay rack or bay. (GMT splash covers are optional for maximum safety when fuses blow.) Another unique feature of the GMT panels is a small hole below each fuse position to accommodate color-coded optional designation pins. Designation pins are useful for quickly identifying required fuse positions and rating of the fuses. The panel is delivered with dummy fuses in all positions.

The standard front panel includes dual-color LEDs for power and failure alarms on the face of an easily removable/replaceable alarm card:

- The POWER LEDs are green when power is on and red when power to that side goes off.
- The FAIL ALARM LED is green when all installed fuses are OK and red when any installed, operable fuse blows.

Below the LEDs and alarm card is a pull-out circuit designation card accommodating up to 40 circuit designation entries.

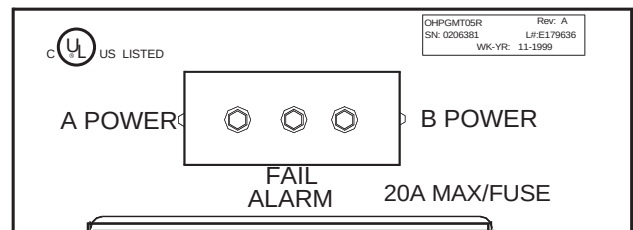


Figure 4 - Alarm Panel

The back panel of the 1RU panels contains input and output terminal connections (NEG or POS connections at the top; RTN connections below), chassis ground connections, and wirewrap pins for external alarm hookups.

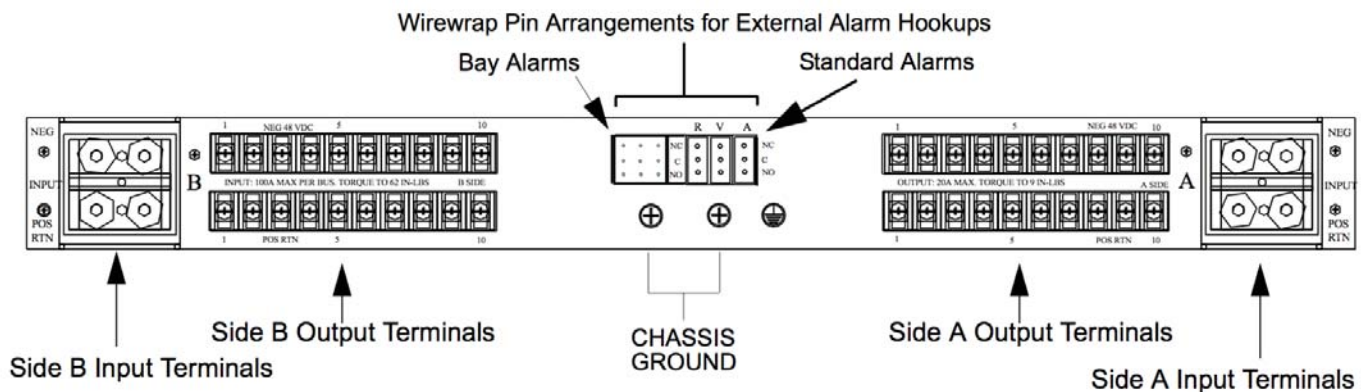


Figure 5 - Model 20HPGMT05BNR (Rear View)

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## 1.1.2.1 Bay & Failure Alarm Options

The panel is available with alarm relays for standard remote/visual/audible failure alarms to light lights and sound alarms when either power feed to the panel fails and/or any fuse blows. Along with the standard alarms, Model 20HPGMT05BNR includes major/ minor bay alarms. Bay alarms are controlled externally to turn on the panel's Form C relay contacts in-circuit with external bay devices or connections. Whenever a bay alarm occurs, the A POWER LED (for a major alarm) or B POWER LED (for a minor alarm) will blink until external control is turned off.

Models 20HPGMT05FR and 20HPGMT05FSR include enhanced power/fuse failure alarms that replace the standard failure alarms. Where the standard failure alarm doesn't differentiate between power or fuse failure, the enhanced power/fuse failure alarms differentiate between A POWER, B POWER, and fuse failures.



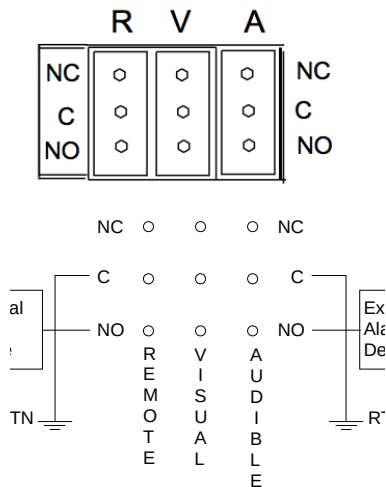


Figure 6 - Standard Alarm Hookups

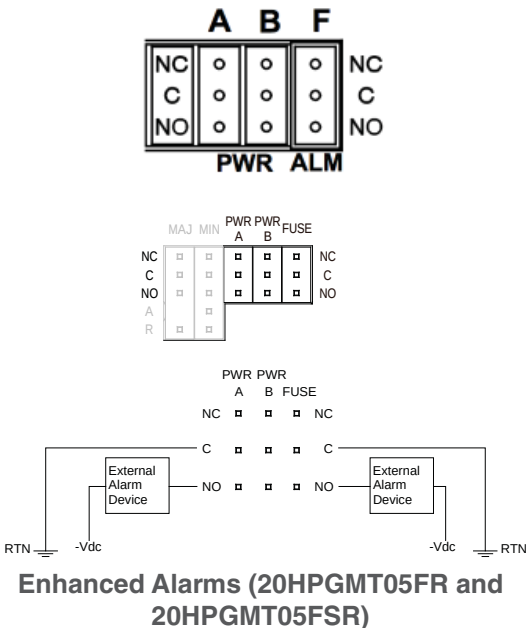

Enhanced Alarms (20HPGMT05FR and 20HPGMT05FSR)

Figure 7 - Alarm Hookups

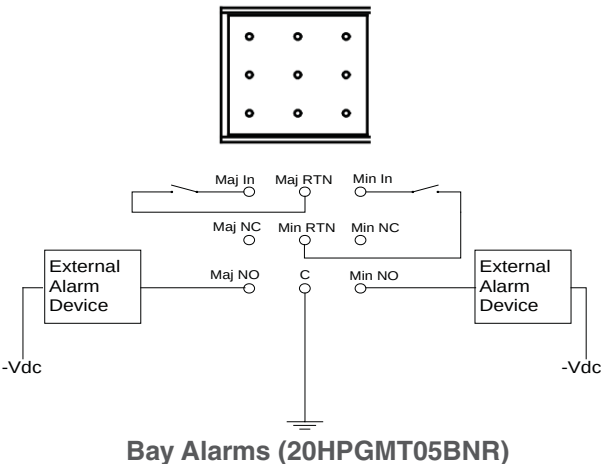

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

---

## 1.1.2.2 Fail-Safe Circuit

Schottky diodes are cross-connected at the input to the power distribution circuits. When both power supplies are energized in a dual-circuit panel, power is balanced between the two supplies by the diodes. If one power supply loses its power or is shut down, the other supply shares its power with both outputs (A and B) through the Schottky diodes. The battery return circuits for A and B must be common for both circuits to operate from either the A or B power source in fail-safe mode. With the 20HPGMT05FR, the user must make the returns common within the overall power system, external to the fuse panel. With the 20HPGMT05FSR, the returns are made common internal to the fuse panel and, no further action by the user is required.

Fail safe panels can distribute a maximum of 150A total in fail safe mode; a maximum of 75A per bus is recommended. The fail-safe feature also includes the enhanced failure alarms described previously.

NOTE: For the fail safe load sharing to function properly, the capacity of each of the user-supplied external feeder fuses or breakers must be greater than the total load of the panel's A and B outputs combined. For example, if the panel's total Load A = 10A and Load B = 10A, then the feeder fuse for Side A and Side B must each be at least 20A (up to 175A). If the panel goes into Fail Safe mode, the lone input terminal can handle up to 150A.

## 1.1.2.3 Power-Line Noise Filter

The filter characteristics under load are such that high-frequency transients are suppressed below effective interference levels for telecommunications equipment used with the panel. With this filter option, the max capacity of the bus is 75A. Typical filter characteristics are:

|       |       |        |       |      |       |       |        |
|-------|-------|--------|-------|------|-------|-------|--------|
| 60 Hz | -44dB | 200 Hz | -58dB | 1kHz | -96dB | 10kHz | -102dB |
|-------|-------|--------|-------|------|-------|-------|--------|

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

---

## 1.2 Installation

### 1.2.1 Rack-Mounting Conditions and Considerations

**Elevated operating temperature:** If you install this equipment in a closed or multi-unit rack assembly, the operating ambient temperature of that environment may become higher than room temperature. Be sure to install the equipment in an environment that can become no warmer than the manufacturer's specified maximum ambient temperature (Tma).

**Reduced air flow:** Make sure the air flow around the equipment in a rack is enough for safe operation of the equipment.

**Mechanical loading:** To prevent an accident, make sure the equipment load is even.

**Circuit overloading:** To prevent problems with the over-current protection and supply wiring, take care not to overload the circuits. Pay attention to equipment nameplate ratings.

**Reliable earthing:** Maintain reliable earthing of rack-mounted equipment. Pay attention to supply connections as well as direct connections to the branch circuit (i.e., use of power strips).

**Disconnect device:** Incorporate an easy-to-reach disconnect device in the building's installation wiring.

### 1.2.2 Inspection

Please read and understand all instructions before beginning installation. If you have questions, contact Telect Technical Support at [support@telect.com](mailto:support@telect.com) or call 1.509.926.6000.

When you receive the equipment, carefully unpack it and compare it to the packaging list. Please report any defective or missing parts to Telect Quality at [quality@telect.com](mailto:quality@telect.com) or call 1.509.926.6000.

Telect is not liable for transit damaged. If the product is damaged, please report it to the carrier and contact Telect Quality.

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## 1.2.3 Installing the Panel

### ! ALERT

**ALERT!** Install this product within a restricted-access location where access is through the use of a tool, lock and key, or other means of security, and is controlled by the authority responsible for the location. Only qualified technicians may install and maintain this product.

### ! ALERT

**ALERT!** Verify all connections meet requirements specified in local electric codes or operating company guidelines before supplying power. Protect this equipment with a fuse or breaker sufficient to interrupt power levels specified under “Electrical Specifications,” on page 2.

### ! ALERT

**ALERT!** Each panel is tested at the factory. Telect recommends, however, that you perform the testing outlined in the following installation procedure to ensure that no damage has occurred during shipping and handling. Both Sides A and B input circuits need to be tested.

Except for Dual-Circuit 20/20 GMT Panels, brackets are provided for either flush or extended EIA or WECO mounting in a 19 in. or 23 in. rack. Mount the Dual-Circuit 20/20 GMT Panels to a 23-in EIA or WECO rack.

1. Locate an unused rack position and mount the panel using the four, 12-24 thread-cutting screws, washers, and star washers provided. Figure 8 shows the hole locations.
2. Tighten screws to 35 in.-lb. (4.29 N•m).

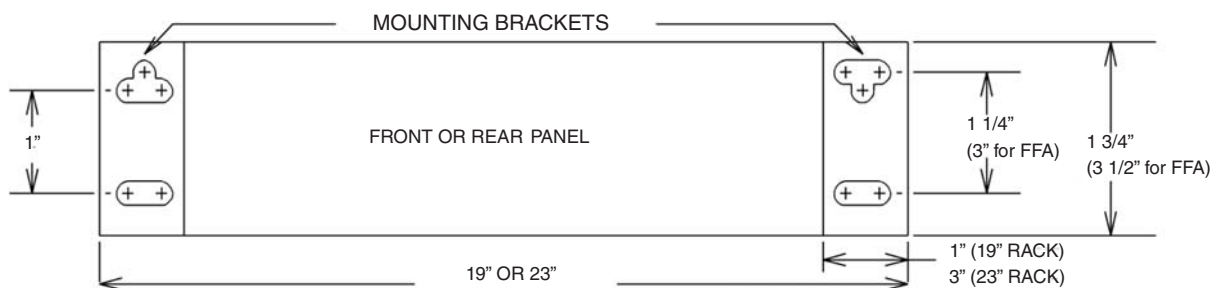


Figure 8 - Mounting Dimensions

3. Remove the see-through cover.
4. Before connecting any conductor, use a multimeter to measure the resistance between the input **NEG** and **RTN** terminals at the front or rear corners of the panel. Expect 500Ω or more for both Side A and Side B.

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT



## WARNING

**WARNING!** Failure to properly ground this equipment can create hazardous conditions to installation personnel and to the equipment.



## ALERT

**ALERT!** Only use components and crimping tools approved by agencies or certifying bodies recognized in your country or region such as Underwriter's Laboratories (UL), TUV, etc.

5. For ground wiring: Use a listed (approved) crimping tool to attach a listed (approved), single- or dual-hole compression lug (dual hole is highly recommended) suitable for a #10 stud (~5mm) on 5/8-in. (15.9 mm) centers onto a suitable ground wire. (Ground wire can be up to #6 AWG for a single-hole lug. Conductor size depends on input interruption device.)
6. Use a coarse, nonmetallic cleaning pad to clean terminals and stud(s).
7. Telect recommends that you lightly coat anti-oxidant on the lug, grounding screw(s), and surrounding contacting surface.
8. Connect the lug to the rear panel using the #10 screw(s) provided, as shown in Figure 9.
9. Make sure the input power is off.



## WARNING

**WARNING!** Before connecting input power cables, make sure the input power to the panel is turned off.

10. For input wiring:
  - a. Crimp dual-hole compression lugs for 1/4-in. studs on 5/8-in. (15.9 mm) centers onto suitable copper wires (#6 to 1/0 AWG) for **NEG** (or **POS**) and **RTN** terminals, Feeds A and B. Lug width must not exceed 0.52 in. (13.4 mm).
  - b. Use a coarse, nonmetallic cleaning pad to clean the terminals and studs.
  - c. Lightly coat anti-oxidant on the lugs and input negative and positive terminals.
  - d. Connect the lugs to Feed A and B input terminals on the back of the panel using the 1/4-20 KEPs nuts and washers provided, as shown in Figure 10.
  - e. Use a 7/16-in (12 mm) socket to tighten lugs to 62 in.-lb. (~6.8 N•m).

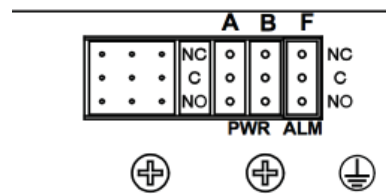


Figure 9-Ground Lug Connection

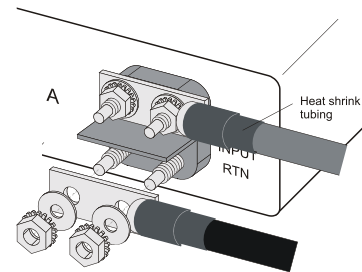


Figure 10 - Compression Lug Inputs

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

11. Make sure the power is off (open breaker, dummy fuse, or vacant fuse holder at power distribution unit [PDU]) before connecting this panel's cables to the PDU.
12. Make sure that only dummy GMT fuses are installed in the panel or that the GMT fuse holders are vacant.



## CAUTION

**CAUTION!** Disconnect all inputs before servicing this unit.



## CAUTION

**CAUTION!** For a panel with an input noise filter, reversing the input cables between the positive and negative terminals could result in damage to the panel. Double-check before proceeding to ensure that the NEG (or POS) and RTN feeds from the PDU are cabled to the proper terminals.

13. Enable the fuse or breaker at the PDU (90A or 125A max., with or without the noise-filter feature, respectively) to turn on Side A of the panel.
14. Check the voltage and polarity at the input connectors of the panel. Also, check that
  - The **A POWER** LED on the front of the panel turns on (green).
  - The **FAIL ALARM** LED turns green.
  - The **B POWER** LED must remain red.
15. On the rear of the panel, with **A POWER** lit (normal operation) — but with the **B POWER** LED off (failure operation) — test the power-fail relays:
  - For a panel with standard failure alarms, test across the remote (R), visual (V), and audible (A) pins. When testing,
    - Expect an open circuit (00Ω) between Terminals **C** and **NC**.
    - Expect continuity (0Ω) between Terminals **C** and **NO**.
  - For a panel with enhanced failure alarms (included with fail-safe feature), test at A PWR, B PWR, and F ALM pins. When testing the A PWR and F ALM pins,
    - Expect continuity (0Ω) between Terminals C and NC.
    - Expect an open circuit (00Ω) between Terminals C and NO. Conversely, when testing the B PWR pins,
    - Expect an open circuit (00Ω) between Terminals **C** and **NC**.
    - Expect continuity (0Ω) between Terminals **C** and **NO**.
16. Repeat Steps 13 to 15 for Feed B and watch to make sure the **B POWER** LED turns green. Also, across all sets of alarm pins,
  - Expect continuity (0Ω) between Terminals **C** and **NC**.
  - Expect an open circuit (00Ω) between Terminals **C** and **NO**.
17. For output wiring, do either of the following:
  - If using lugs, strip off  $\frac{3}{8}$  in. (~10 mm) of insulation from one end of the copper output wires and then crimp on ring or forked, single-hole lugs, as required by NEC. (Screw terminals will accommodate lugs for up to 10 AWG.)
  - If using bare wire, strip off  $\frac{5}{8}$  in. (~15 mm) of insulation. (Stranded wires should be tinned.)

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## ALERT

**ALERT!** GMT fuses have a small, inherent electrical resistance resulting in a small inherent power loss. For this reason, the GMT fuse manufacturer recommends that the load for GMT fuses up to and including 7.5A not exceed 80% of the fuse rating and that the load for GMT fuse sizes 10A, 15A, and 20A not exceed 70% of the fuse rating. For example, the load for a 15A GMT fuse should not exceed 10.5A ( $15A \times 0.70 = 10.5A$ ).

**Total load for all fuse outputs on each side must not exceed 100A for a panel without the fail-safe feature, or 75A for a panel with the fail-safe feature.**

18. Telect recommends that you lightly coat anti-oxidant on lugs, wires, and output negative and positive terminals before connecting the lugs/wires to outputs. (NEC specifies only one lug/ wire and load for each output terminal.)
19. Tighten the screws to 9 in.-lb. ( $\sim 1.0 \text{ N}\cdot\text{m}$ ).
20. Connect the other end of the output wires to load.
21. Use the pull-out designation card at the front of the panel to record outputs, as specified by operating company standard operating procedures.
22. Make sure the inputs at loads are disabled by removing all power cards or all input fuses at the load equipment.

Always follow the recommended operating company guidelines when disabling load equipment.

## ALERT

**ALERT! Use only UL-listed circuit breakers or UL-recognized component secondary protection devices.**

23. Insert the proper sizes of GMT fuses in designated fuse holders using the designation card to identify the circuits. If applicable, install color-coded designation pins to match the fuses.
24. Check voltage and polarity at input of loads.
25. After you have installed all designated GMT fuses, check that the **FAIL ALARM** LED is still green. Again, test the alarm relay contacts at R, V, A, F ALM pins on the rear of the panel. As before,
  - Expect continuity ( $0\Omega$ ) between Terminals **C** and **NC**.
  - Expect an open circuit ( $00\Omega$ ) between Terminals **C** and **NO**.

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

26. If available, replace one of the fuses with a blown fuse and check that the FAIL ALARM LED changes to red. Check the R, V, A, F ALM pins again:
  - Expect an open circuit ( $\infty\Omega$ ) between Terminals **C** and **NC**.
  - Expect continuity ( $0\Omega$ ) between Terminals **C** and **NO**. When finished, re-install the operable fuse.
27. If desired, wirewrap the remote external audio/visual alarm indicator wires (solid copper wires, #22 to #18 AWG) to the alarm terminals.
28. One by one, re-enable the load equipment and verify proper operation.
29. Re-install the cover.

## 1.2.4 Replacing the Alarm Board

If the alarm LEDs or other alarm functions are not operating properly, the alarm circuit board may be removed and replaced from the front of the fuse panel. You do not need to remove power or otherwise take the fuse panel or the equipment it is feeding out of service to perform alarm board replacement.

Contact Telect for a replacement alarm board. (See “1.4 Parts & Accessories” on page 14.) When replacing an alarm board, ensure that the keyed connector at the rear wall of the panel mates properly with the new board.

Plastic clips hold the alarm board to the front of the panel.

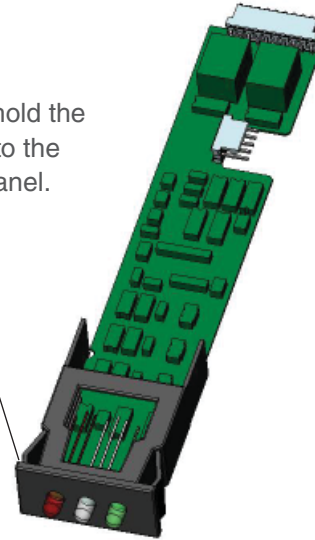


Figure 11 - Replacing the Alarm Board



## WARNING

**WARNING! DISCONNECT ALL INPUTS BEFORE SERVICING THIS UNIT.**



## CAUTION

**CAUTION! Only qualified technicians may install and maintain this product.**

## 1.3.1 Owner Maintenance

High-Power GMT Fuse Panels do not require special preventive maintenance.

If you encounter technical difficulties, please use the online request form at [www.telect.com](http://www.telect.com) under Support\Technical Support or call Telect directly at 888.821.4856.

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## 1.3.2 In-Warranty Service

Contact Telect Quality at 1.509.926.6000 or e-mail us at [quality@telect.com](mailto:quality@telect.com). Telect will ship a new replacement product, along with a return shipping label and authorization information. When you receive your replacement product, pack up the defective product and return it to Telect using the return label, box and any additional information provided.

## 1.3.3 Out-Of-Warranty Service

Follow the In-Warranty directions above. Telect charges a processing fee for out-of-warranty service, and you must submit a Purchase Order along with a Return Material Authorization (RMA) before returning equipment. The processing fee guarantees a repair estimate and is credited against actual material and labor costs. Call Telect Quality at 1.509.926.6000 for more information.

## 1.3.4 Repacking for Shipment

1. Tag the equipment showing owner's name, address, and telephone number, together with a detailed description of the problem.
2. Use the original shipping container if possible. If you do not have it, package the equipment in a way to prevent shipping damage. Include the RMA inside the container and legibly print the RMA number on the outside of the package, near the shipping address.
3. Insure the package.

## 1.4 Parts & Accessories

Table 2 - Alarm Boards

| Item                          | Description | Part Number |
|-------------------------------|-------------|-------------|
| Alarm Board for Dual Circuits | Standard    | 16188F01    |

Table 3 - GMT Fuses

| GMT Fuse           | Part Numbers GMT Fuse | Parts Numbers for Colored Designation Pin |
|--------------------|-----------------------|-------------------------------------------|
| 0.18A Yellow (YEL) | 130781                | 102435-21                                 |
| ¼A Violet (VIO)    | 100151                | 102435-2                                  |
| ½A Red (RED)       | 004001                | 102435-5                                  |
| ¾A Brown (BRN)     | 004008                | 102435-7                                  |



# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

**Table 3 - GMT Fuses**

| GMT Fuse                     | Part Numbers GMT Fuse | Parts Numbers for Colored Designation Pin |
|------------------------------|-----------------------|-------------------------------------------|
| 1A Gray (GRY)                | 100991                | 102435-8                                  |
| 11/3A White (WHT)            | 004006                | 102435-9                                  |
| 11/2A White/Yellow (WHT/YEL) | 004011                | 102435-10                                 |
| 2A Orange (ORN)              | 004002                | 102435-11                                 |
| 2.5A White/Orange (WHT/ORN)  | 130783                | 102435-12                                 |
| 3A Blue (BLU)                | 004012                | 102435-13                                 |
| 3.5A White/Blue (WHT/BLU)    | 130782                | 102435-14                                 |
| 4A White/Brown (WHT/BRN)     | 004013                | 102435-15                                 |
| 5A Green (GRN)               | 004014                | 102435-16                                 |
| 7 1/2A Black/White (BLK/WHT) | 004010                | 102435-17                                 |
| 10A Red/White (RED/WHT)      | 004015                | 102435-18                                 |
| 12A Yellow/Green (YEL/GRN)   | 102287                | 102435-19                                 |
| 15A Red/Blue (RED/BLU)       | 102288                | 102435-20                                 |
| 20A White/Green (WHT/GRN)    | 127240RC              | 102435-22                                 |
| Dummy Fuses                  | 132748                |                                           |
| GMT Safety Covers            | 116915                |                                           |
| Medium-duty GMT fuse puller  | 06113-03              |                                           |

**Table 4 - Dual-Hole Compression Lug Part Numbers vs. Input or Ground Wire Size For 1/4-in. Studs on 5/8-in. Centers)**

|                     | 1/0 AWG                       | #1 AWG                      | #2 AWG                      | #4 AWG                     | #6 AWG <sup>a</sup>         | #8 AWG                      |
|---------------------|-------------------------------|-----------------------------|-----------------------------|----------------------------|-----------------------------|-----------------------------|
| T&B                 |                               |                             |                             | 54206<br>(Die Code 29)     | 54205<br>(Die Code 24)      | 54850BE<br>(Die Code 21)    |
| Burndy <sup>b</sup> | YA25L2NT14E1<br>(Die Code 12) | YA1CL2NT14<br>(Die Code 11) | YA2CL2NT14<br>(Die Code 10) | YA4CL2TC14<br>(Die Code 8) | YA6CL2TC14<br>(Die Code 7)  | YA8CL2TC14<br>(Die Code 9)  |
| Panduit             |                               |                             | LCDN2-14AQ<br>(Die Code 33) |                            | LCD6-14A-L<br>(Die Code 24) | LCD8-14A-L<br>(Die Code 21) |

a. #6 AWG lug can be used for dual-hole grounding as well.

b. Burndy lugs available in 45- and 90-degrees, will add degree suffix.

Example: 45 degree, YA2CL2NT14 = YA2CLNT1445

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

Table 5 - Single-Hole Ring Lug Part Numbers vs Output Wire Size (For #6 Panhead Screws)

|         | #22 - 18 AWG | #22-16 AWG | #16 - 14 AWG | #12 - 10 AWG |
|---------|--------------|------------|--------------|--------------|
| AMP     | 51863        | 51863      | 320619       | 329697       |
| Panduit | PN18-6R-M    |            | PN14--6RN-M  |              |

## 1.5 Diagrams

### 1.5.1 Block Diagram

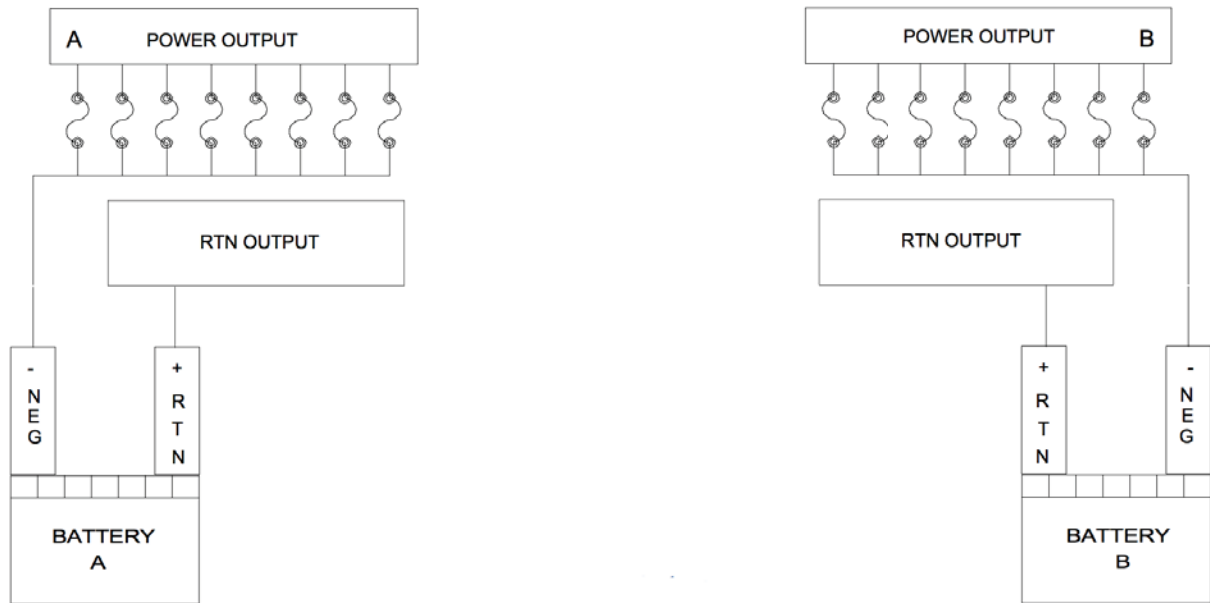





Figure 12 - Power, Battery Return and Fuse Circuit

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## 1.5.2 1RU Dimensions

NOTE: Dimensions are in in. [mm].

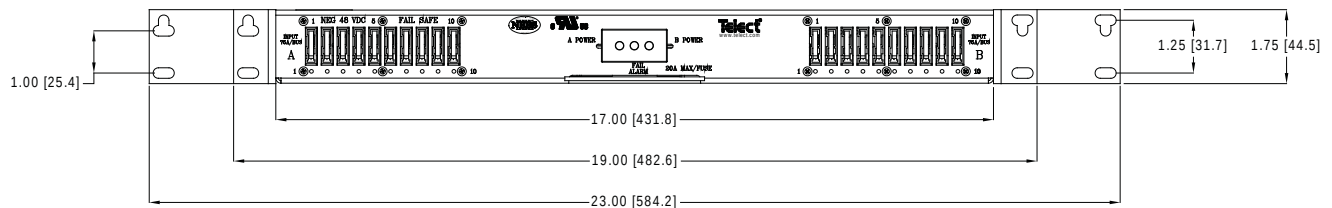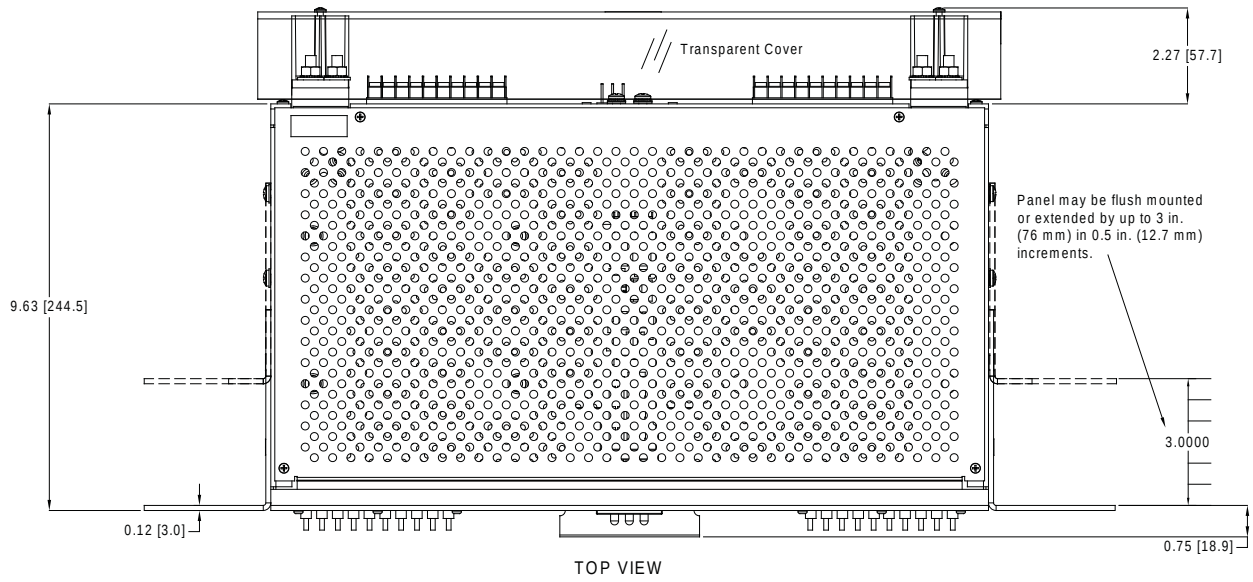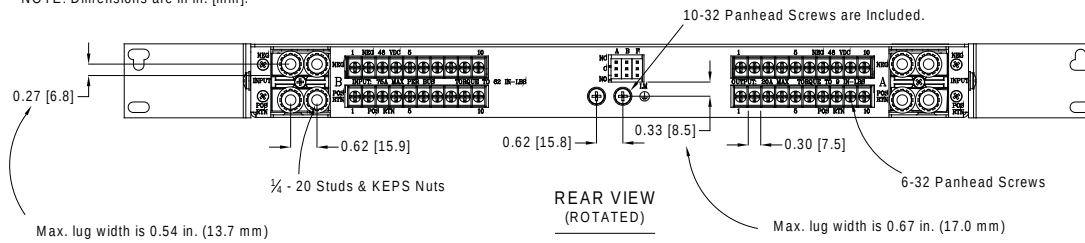


# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## 1.5.3 2RU Dimensions

NOTE: Dimensions are in in. [mm].

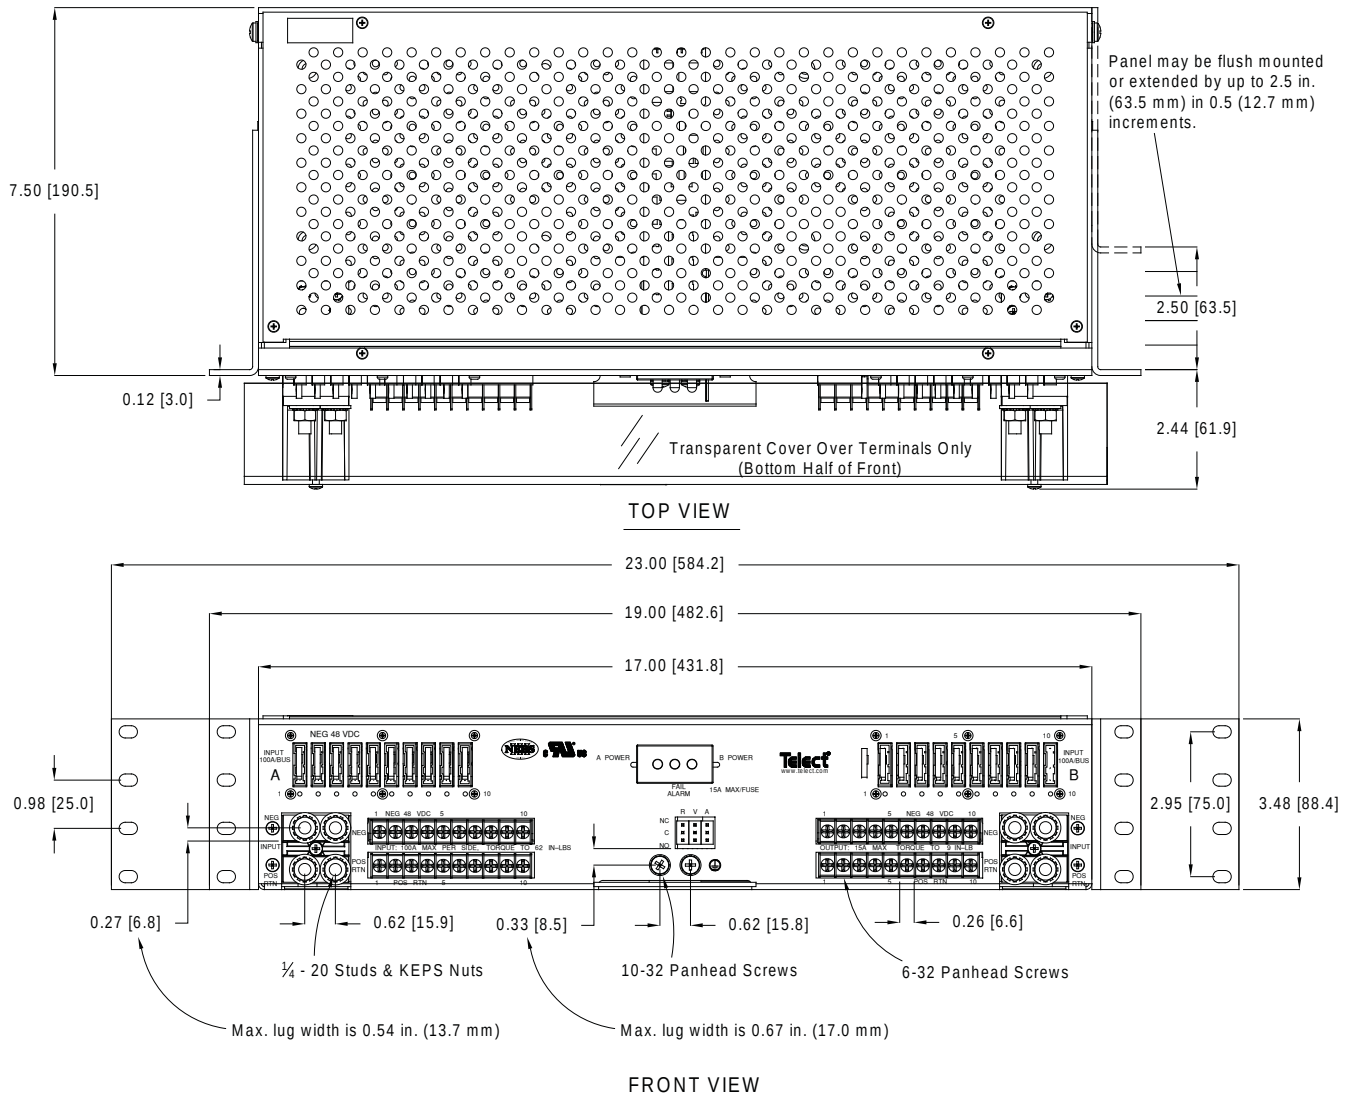

Telect assumes no liability for the application or use of these products. Neither does Telect convey any license under its patent rights or the patent rights of others. This document and the products described herein are subject to change without notice.

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

## U.S. Conformity Assessment Body Certificate of Conformity

No. 174-0923-1-0




Upon assessment of Technical Construction File 174-0923-1-0-TCF  
it has been determined that the

### Hendry Telephone Products Power Distribution and Fan Panels

conform to the protection requirements set out in article 4 of  
EMC Directive 89/336/EEC

as per EN 55022 :94 with A1 :95 & A2 :97 (class A),  
EN 61000-3-2 :95, EN 61000-3-3 :95, EN 300 386 V1.2.1 :00-03,  
and ETS 300 132-2;

and in accordance with the Agreement on Mutual Recognition between the United States of America and the European Community, Sectoral Annex for EMC, this U.S. Conformity Assessment Body hereby certifies attestations of compliance to the EMC requirements so demonstrated.

  
Steven C. Halme  
Sr. Program Manager/EMC Engineer  
(714)879-6110  
Fullerton, CA, USA 10/30/01  
(date signed)

  
Betty Matteson  
Quality Assurance Manager  
(714)879-6110  
Fullerton, CA, USA 10/30/01  
(date signed)

**National Technical Systems**

1536 E. Valencia Drive; Fullerton, CA, USA 92831-4797; Tel (714) 879-6110; Fax (714) 879-6117

# High-Power 20A GMT Series Fuse Panels

Power :: Models 20HPGMT

---

This page intentionally left blank.