


CIRQUE 4-AIP 4-ADP 4-IP 4-DP

**DIRECT-INDIRECT
ANGLED DIRECT-INDIRECT**

- Direct-indirect and angled direct-indirect light distributions.
- Extruded aluminum housing.
- Nominal 3', 4', 6' and 8' illuminated sections.
- Runs any length of above component configurations.
- Diffusers – radial baffle and/or acrylic ribbed lens
- Die cast end caps.
- Custom finishes available by special order.

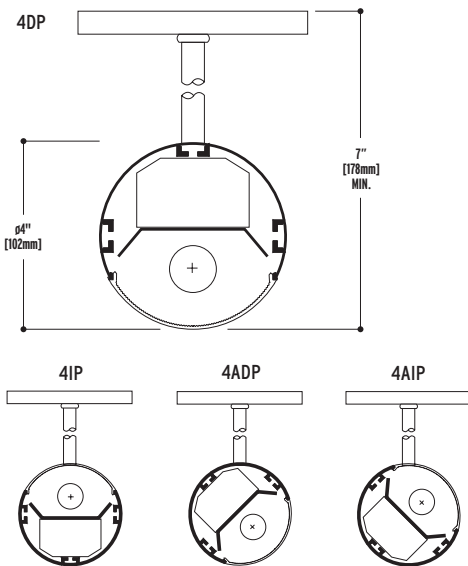

ORDERING INFORMATION:

Sample number: 4DP-1T5-ST12-1EB-SI-S26

Series

4=Cirque

Light Output

DP=Direct Pendant
IP=Indirect Pendant
ADP=Angle-Direct Pendant
AIP=Angle-Indirect Pendant

Number of Lamps (per cross section) (not included)

1=1 Lamp

Lamp Type

T8 T5 T5HO

Pendant Type

ST=Single Stem² SC=Single Cable

Run Length

Overall Nominal Run Length ___ft. (Any combination of 8', 6', 4' and 3' sections)

Voltage¹

1=120V 2=277V 3=347V U=Universal

Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast

Switching

SI=Single Switching

Emergency

EM=Emergency Pack (Consult Factory)

Fusing

GLR GMF

Shielding

S14=Contoured Baffle S26=Clear Ribbed Acrylic Lens

Construction: Extruded aluminum housing. Nominal 3', 4', 6' or 8' illuminated sections.

End Caps: Die-cast aluminum.

Shielding: Clear ribbed acrylic lens or contoured baffle.

Electrical: 120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.


Finish: Durable, low gloss, white, powder coated acrylic finish.

Mounting:

Pendant with single stem (standard) or single cable. Canopy: Round 5" diameter.

¹ Due to various constraints, some options may not be combined with others.
² Available with 7° or earthquake 45° swivel canopy assembly.

ROW CONFIGURATION

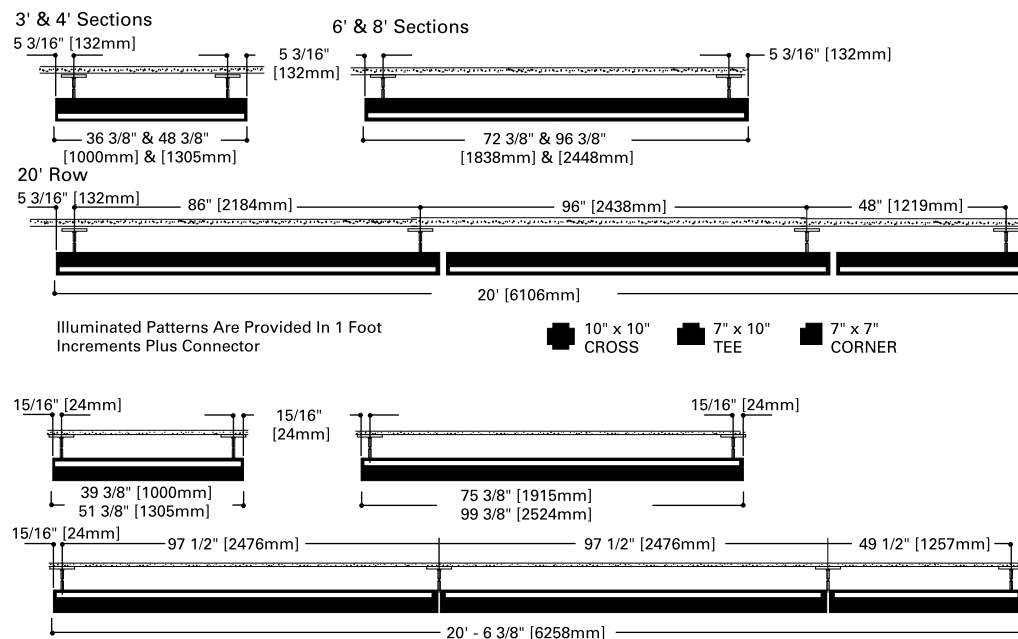

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.