



# NEO-RAY™



## CIRQUE 6-AIP 6-ADP 6-DP/IP

### DIRECT-INDIRECT ANGLED DIRECT-INDIRECT

- Direct-indirect and angled direct-indirect light distributions.
- Extruded aluminum housing.
- Nominal 3', 4', 6' and 8' illuminated sections.
- Runs any length of above component configurations.
- Diffusers – radial baffle and/or acrylic ribbed lens.
- Die cast end caps.
- Custom finishes available by special order.

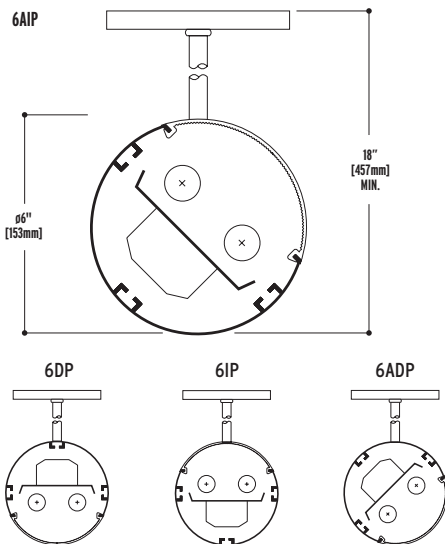

**Construction:** Extruded aluminum housing. Nominal 3', 4', 6' or 8' illuminated sections.

**End Caps:** Die-cast aluminum.

**Shielding:** Clear ribbed acrylic lens or contoured baffle.

**Electrical:** 120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

**Finish:** Durable, low gloss, white, powder coated acrylic finish.

**Mounting:** Pendant with single stem (standard) or single cable. Canopy: Round 5" diameter.

### ORDERING INFORMATION:

Sample number: 6AIP-1T8-SC40-1EB-SI-EM-S14

#### Series

6=Cirque

#### Light Output

DP=Direct Pendant

IP=Indirect Pendant

ADP=Angle-Direct Pendant

AIP=Angle-Indirect Pendant

#### Number of Lamps (not included)

1=1 Lamp 2=2 Lamps

#### Lamp Type

T8

T5

T5HO

#### Pendant Type

SC=Single Cable

ST=Single Stem<sup>2</sup>

#### Run Length

Overall Nominal Run Length\_\_ft. (Any combination of 8', 6', 4' and 3' sections)

#### Voltage<sup>1</sup>

1=120V

2=277V

3=347V

U=Universal

#### Ballast

EB=Electronic Ballast (Standard)

DB=Dimming Ballast

#### Switching

SI=Single Switching

DU=Dual Switching

#### Emergency

EM=Emergency Pack (Consult Factory)

#### Fusing

GLR

GMF

#### Shielding


S14=Contoured Baffle

S26=Clear Ribbed Acrylic Lens

<sup>1</sup> Due to various constraints, some options may not be combined with others.

<sup>2</sup> Available with 7° or earthquake 45° swivel canopy assembly.

### ROW CONFIGURATION

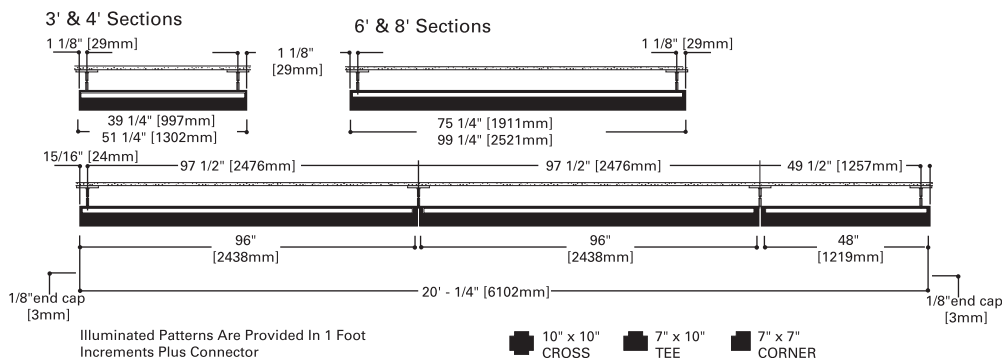

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.