

# COMBOLIGHT® COMBO CLASSIC RECESSED

## LAMP GROUP 1 - CONFIGURATION "F"

**TWO (2) Halogen lamp cells - ONE (1) Fluorescent lamp cells**  
**New Construction Recessed Housing - Trim or Trimless**

Catalog # \_\_\_\_\_

Type \_\_\_\_\_

Project \_\_\_\_\_

**DESCRIPTION:**

An adjustable recessed fixture suitable for multiple downlighting applications with one point of electrical entry. Mixes the use of low voltage halogen lamps with fluorescent lamps. Powder coat finish on housing & lamp assembly.

**CONSTRUCTION:**

Housing, Plaster Frame & Trim Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture is offered with a .75" ceiling trim or as a trimless fixture. Can accommodate 0.50" to 1.00" ceiling thickness.

**LAMP ASSEMBLY:**

Four low voltage halogen lamp cells with one fluorescent lamp cell. Can accept up to two optical accessories. 380° x 45° locking lamp adjustment. Provides 45° visual cut-off.

**SYSTEM PROTECTION:**

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation


**ELECTRICAL:**

Fixture is two circuit.  
*Circuit 1:* Integral electronic transformer for low voltage lamps. Fused and short circuit protection. Dimmable.

*Circuit 2:* Integral electronic ballasts for fluorescent lamps.  
**Lutron® dimming ballasts available upon request.**

Junction box is UL listed for through branch wiring, for 8 #12, 90°C supply conductors or 60°C for end of run (access above ceiling not required).

Made in the USA.

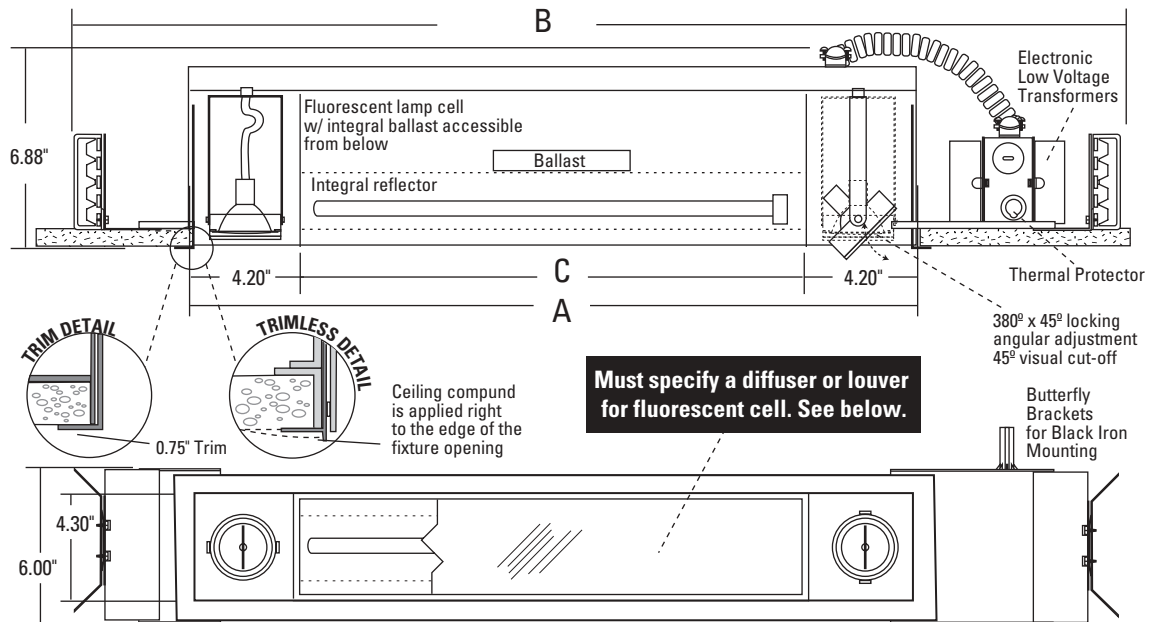

Custom configurations are available with Combo Classic fixtures. Also available with T8 fluorescent lamps. Consult RSA for details.



Fluorescent >>	BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54	
Lamp Group 1	A	34.19"	34.19"	34.19"	16.69"	17.19"	18.19"	57.69"	69.69"	45.69"	57.69"
	B	45.99"	45.99"	45.99"	24.49"	28.99"	35.29"	69.49"	81.49"	57.49"	69.49"
	C	25.50"	25.50"	25.50"	8.00"	8.50"	9.50"	49.00"	61.00"	37.00"	49.00"

**ORDERING EXAMPLE:** CR11650 F BX40 BK WH 120

= Two MR16 50W lamps with One BIAx® 40W Fluorescent • Double Wide • Black Interior • White Trim • 120 volts

Optional Accessories - See RSA Combo Classic accessory page for details.

Baffle	Snoots	Louvers	Lenses

Fluorescent Diffusers and Louvers - Please specify

<input type="checkbox"/> TWD - Textured White Diffuser	<input type="checkbox"/> CB1 - 2" Parabolic Louver
<input type="checkbox"/> MPD - Conical Prism Diffuser	<input type="checkbox"/> CB2 - 1" Parabolic Louver

Item # / Lamp Type	Configuration	Fluorescent Lamp Cell	Interior Finish	Trim Finish	Voltage
Lamp Group 1	F - Two Low Voltage Halogen lamp cells with One Fluorescent lamp cell	BX40 - 40W BIAx®	BK - Black	BK - Black	120 - 120 Volts
		BX50 - 50W BIAx®	WH - White	WH - White	277 - 277 Volts
		PLL80 - 80W PL-L	S - Silver	S - Silver	
		PLT26 - 26W PL-T	PT - Custom	PT - Custom	
		PLT32 - 32W PL-T		TR - Trimless	
		PLT42 - 42W PL-T			
		T528 - 28W T5			
		T535 - 35W T5			
		T5HO39 - 39W T5HO			
		T5HO54 - 54W T5HO			

T8 lamps also available

SPECIFY -