

# COMBOLIGHT® COMBO CLASSIC RECESSED

## LAMP GROUP 1 - CONFIGURATION "D"

TWO (2) Halogen lamp cells - TWO (2) Fluorescent lamp cells

New Construction Recessed Housing - Trim or Trimless

Catalog # \_\_\_\_\_

Type \_\_\_\_\_

Project \_\_\_\_\_

### DESCRIPTION:

An adjustable recessed fixture suitable for multiple downlighting applications with one point of electrical entry. Mixes the use of low voltage halogen lamps with fluorescent lamps. Powder coat finish on housing & lamp assembly.

### CONSTRUCTION:

Housing, Plaster Frame & Trim Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture is offered with a .75" ceiling trim or as a trimless fixture. Can accommodate 0.50" to 1.00" ceiling thickness.

### LAMP ASSEMBLY:

Two low voltage halogen lamp cells with two fluorescent lamp cells. Can accept up to two optical accessories. 380° x 45° locking lamp adjustment. Provides 45° visual cut-off.

### SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation


### ELECTRICAL:

Fixture is two circuit.  
**Circuit 1:** Integral electronic transformer for low voltage lamps. Fused and short circuit protection. Dimmable.

**Circuit 2:** Integral electronic ballasts for fluorescent lamps.  
**Lutron® dimming ballasts available upon request.**

Junction box is UL listed for through branch wiring, for 8 #12, 90°C supply conductors or 60°C for end of run (access above ceiling not required).

Made in the USA.

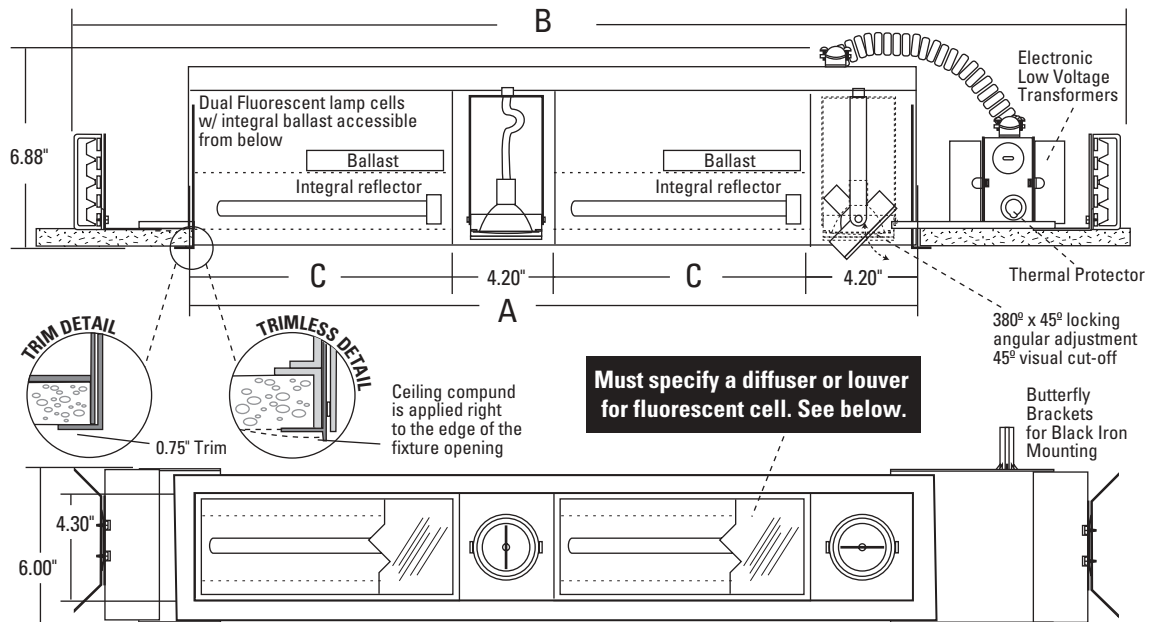

**Must specify a diffuser or louver for fluorescent cell. See below.**

Custom configurations are available with Combo Classic fixtures. Also available with T8 fluorescent lamps. Consult RSA for details



Fluorescent >>	BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54	
Lamp Group 1	A	59.78"	59.78"	59.78"	24.78"	25.78"	27.78"	106.78"	130.78"	82.78"	106.78"
	B	71.58"	71.58"	71.58"	35.58"	40.08"	39.58"	118.58"	142.58"	94.58"	118.58"
	C	25.50"	25.50"	25.50"	8.00"	8.50"	9.50"	49.00"	61.00"	37.00"	49.00"

**ORDERING EXAMPLE:** CR11650 D BX40 BK WH 120

= Two MR16 50W lamps with Two BIAx® 40W Fluorescent • Double Wide • • Black Interior • White Trim • 120 volts

Optional Accessories - See RSA Combo Classic accessory page for details.	Fluorescent Diffusers and Louvers - Please specify
Baffle	<input type="checkbox"/> TWD - Textured White Diffuser
Snoots	<input type="checkbox"/> CB1 - 2" Parabolic Louver
Louvers	<input type="checkbox"/> MPD - Conical Prism Diffuser
Lenses	<input type="checkbox"/> CB2 - 1" Parabolic Louver

Item # / Lamp Type	Configuration	Fluorescent Lamp Cell	Interior Finish	Trim Finish	Voltage
Lamp Group 1	D - Two Low Voltage Halogen lamp cells with Two Fluorescent lamp cells	BX40 - 40W BIAx®	BK - Black	BK - Black	120 - 120 Volts 277 - 277 Volts
		BX50 - 50W BIAx®	WH - White	WH - White	
		PLL80 - 80W PL-L	S - Silver	S - Silver	
		PLT26 - 26W PL-T	PT - Custom	PT - Custom	
		PLT32 - 32W PL-T		TR - Trimless	
		PLT42 - 42W PL-T			
		T528 - 28W T5			
		T535 - 35W T5			
		T5HO39 - 39W T5HO			
		T5HO54 - 54W T5HO			

T8 lamps also available

SPECIFY -



RSA LIGHTING LLC 9660 - 9700 TOPANGA CANYON BLVD. CHATSWORTH CA. 91311  
 TOLL FREE: 800-356-3030 • 818-349-3030 • FAX: 818-349-3031 • www.rsalighting.com  
 ©2003 RSA Lighting LLC All Rights Reserved • Specifications subject to change without notice.