RECESSED GRID CEILING MOUNT w/ OPEN HOUSING PAR30MH Catalog

DESCRIPTION:

An adjustable PAR30MH fixture suitable for multiple downlighting applications with one point of electrical entry. For use in layin t-bar grid style ceilings. Powder coat finish on housing & lamp assembly.

CONSTRUCTION:

Housing Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture utilizes specially developed retaining clips for snap-in mounting directly to t-bar supports. Tabs on housing top accommodate above ceiling aircraft cable support for added stability.

LAMP ASSEMBLY:

Two PAR30MH lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380º x 45º locking lamp adjustment. Provides 45º visual cut-off.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Integral Aromat® electronic metal halide ballsts. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical wiring accessible through ceiling opening.


ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.

Cat. # / Description

Grid Style



COMBOLIGHT® GR Series TWO (2) Light Recessed **Multi-Lamp Luminaire** for Lay-in, T-Bar Grid Style Ceiling **Open Housing Aperture Metal Halide PAR30MH**

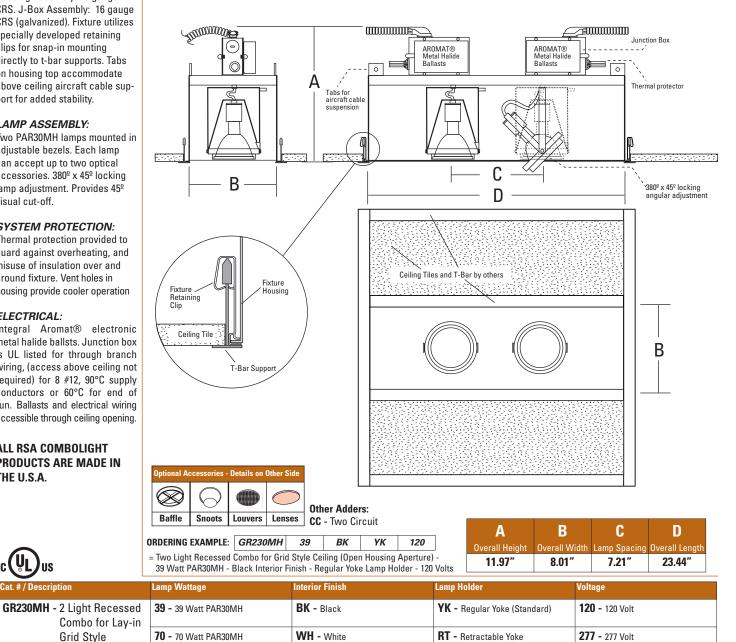

| | Ceilings | | | |
|-----------|----------|---|-------------|--|
| | PAR30MH | | S - Silver | |
| | | | | |
| | | | PT - Custom | |
| | | | | |
| | | | | |
| SPECIFY - | GR230MH | | | |
| | L | 1 | J | |
| | | | | |

RSA LIGHTING.

RSA LIGHTING LLC 9660 - 9700 TOPANGA CANYON BLVD. CHATSWORTH CA. 91311 TOLL FREE: 800-356-3030 • 818-349-3030 • FAX: 818-349-3031 • www.rsalighting.com ©2003 RSA Lighting LLC All Rights Reserved • Specifications subject to change without notice.

Type