## **RECESSED GRID CEILING MOUNT**

w/ OPEN HOUSING PAR30MH

#### **DESCRIPTION:**

An adjustable PAR30MH fixture suitable for multiple downlighting applications with one point of electrical entry. For use in layin t-bar grid style ceilings. Powder coat finish on housing & lamp assembly.

#### **CONSTRUCTION:**

Housing Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture utilizes specially developed retaining clips for snap-in mounting directly to t-bar supports. Tabs on housing top accommodate above ceiling aircraft cable support for added stability.

#### LAMP ASSEMBLY:

Four PAR30MH lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking lamp adjustment. Provides 45° visual cut-off.


#### SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

#### **ELECTRICAL**:

Integral Aromat® electronic metal halide ballsts. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical wiring accessible through ceiling opening.

# ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.




Catalog #

Type

Project

### COMBOLIGHT® GR Series

FOUR (4) Light Recessed Multi-Lamp Luminaire for Lay-in, T-Bar Grid Style Ceiling Open Housing Aperture Metal Halide PAR30MH

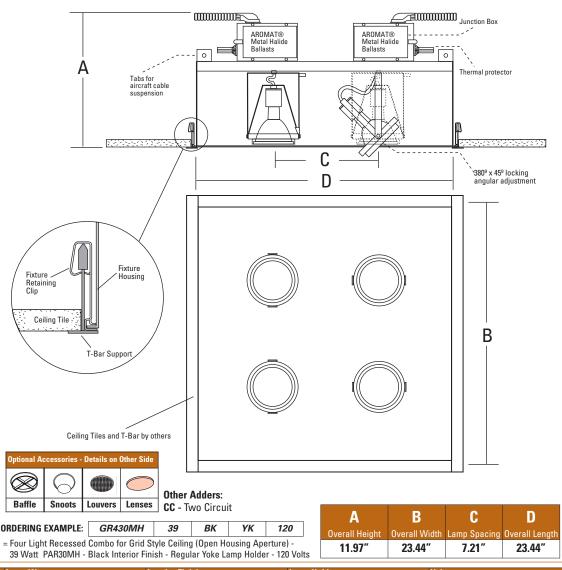

Cat. # / Description	Lamp Wattage	Interior Finish	Lamp Holder	Voltage
GR430MH - 4 Light Recessed Combo for Lay-in Grid Style Ceilings PAR30MH		<b>BK</b> - Black	YK - Regular Yoke (Standard)	<b>120</b> - 120 Volt
	<b>70</b> - 70 Watt PAR30MH	WH - White	RT - Retractable Yoke	<b>277</b> - 277 Volt
		S - Silver		
		PT - Custom		
SPECIFY - GR430MH				