

Kramer Electronics, Ltd.



USER MANUAL

Model:

VM-2DVI

High Resolution / Dual Link 1:2 DVI Distributor

Contents

1	Introduction	1
2	Getting Started	1
2.1	Quick Start	1
3	Overview	3
4	Your VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor	4
5	Connecting the VM-2DVI	5
6	Technical Specifications	7

Figures

Figure 1:	VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor	4
Figure 2:	Connecting a VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor	6

Tables

Table 1:	VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor Features	4
Table 2:	Technical Specifications of the VM-2DVI	7

1 Introduction

Welcome to Kramer Electronics (since 1981): a world of unique, creative and affordable solutions to the infinite range of problems that confront the video, audio and presentation professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better! Our 500-plus different models now appear in 8 Groups¹, which are clearly defined by function.

Congratulations on purchasing your Kramer **VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor**.

The **VM-2DVI** is ideal for audio video duplication studios, as well as rental and staging. Each package includes the following items:

- **VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor**
- Power adapter (12V DC Input)
- This user manual²

A single DVI LINK has a data transmission rate of 1.65Gbps per color. If you need higher resolution, use DUAL LINK technology, which is supported by the **VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor**.

2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
- Use Kramer high performance high resolution cables³

2.1 Quick Start


This quick start chart summarizes the basic setup and operation steps.

1 GROUP 1: Distribution Amplifiers; GROUP 2: Video and Audio Switchers, Matrix Switchers and Controllers; GROUP 3: Video, Audio, VGA/XGA Processors; GROUP 4: Interfaces and Sync Processors; GROUP 5: Twisted Pair Interfaces; GROUP 6: Accessories and Rack Adapters; GROUP 7: Scan Converters and Sealers; and GROUP 8: Cables and Connectors

2 Download up-to-date Kramer user manuals from the Internet at this URL: <http://www.kramerelectronics.com>

3 The complete list of Kramer cables is on our Web site at <http://www.kramerelectronics.com>

Step 1: Connect the input and the outputs - see section 5

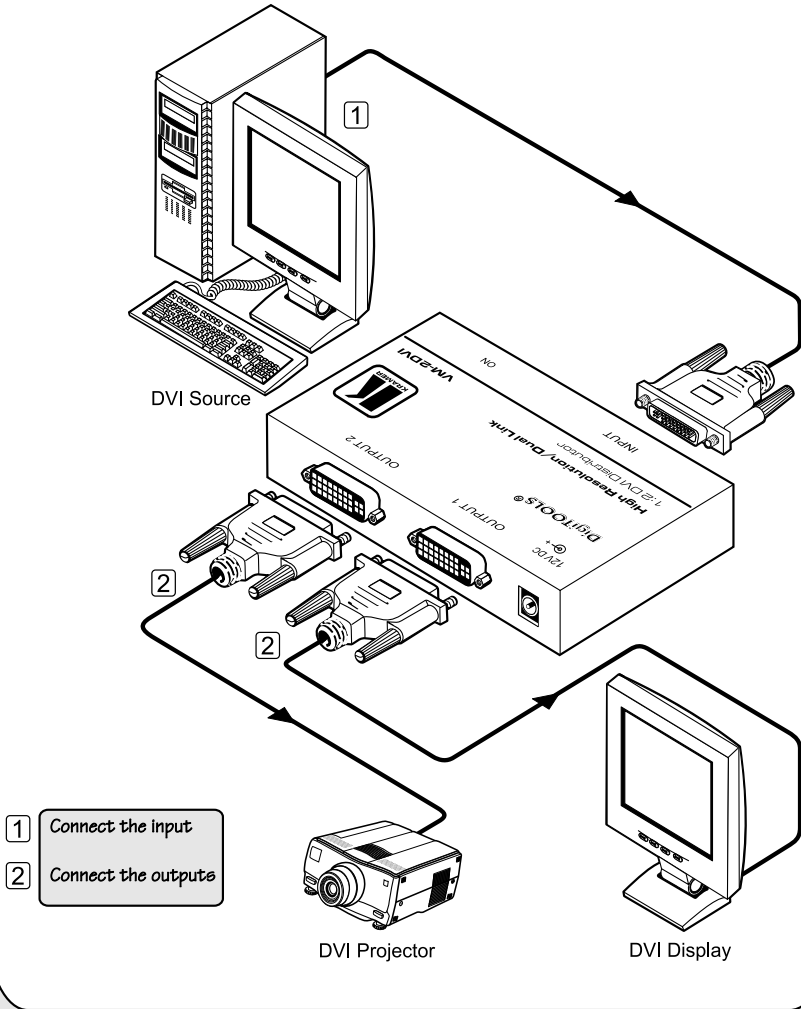

Step 2: Connect the power

3 Overview

The **VM-2DVI** is a high quality *High Resolution / Dual Link 1:2 DVI Distributor* that accepts a DVI input and distributes the signal to two identical outputs. One or both of the outputs may be connected to receiving devices, since the **VM-2DVI** has independent output drivers, making it a versatile, reliable component in a graphics system.

In particular, the **VM-2DVI**:

- Is a cost-effective solution for distributing the TMDS signals used for DVI, and uses state-of-the-art line drivers on each of the two outputs
- Can be used in any application where more than one DVI monitor, projector or other receiving device is to be driven via a single DVI source

Note that only the digital signal (DVI-D) is available on the DVI connector

To achieve the best performance:

- Connect only good quality connection cables, thus avoiding interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality and position your Kramer **VM-2DVI** away from moisture, excessive sunlight and dust



Caution – No operator-serviceable parts inside unit.

Warning – Use only the Kramer Electronics input power wall adapter that is provided with this unit¹.

Warning – Disconnect power and unplug unit from wall before installing or removing device or servicing unit.

¹ For example: model number AD2512C, part number 2535-000251

4 Your VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor

Figure 1 and Table 1 define the **VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor**:

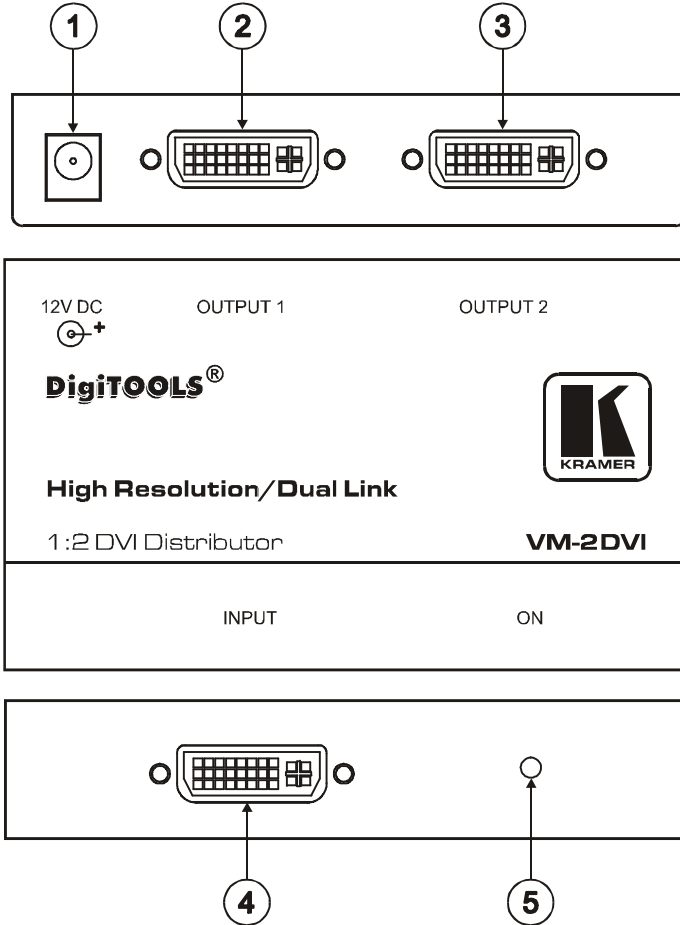


Figure 1: VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor

Table 1: VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor Features

#	Feature	Function
1	12V DC	+12V DC connector for powering the unit
2	OUTPUT 1 DVI (or DVI Dual Link) Connector	Connect to the DVI (or DVI DUAL LINK) acceptor 1
3	OUTPUT 2 DVI (or DVI Dual Link) Connector	Connect to the DVI (or DVI DUAL LINK) acceptor 2
4	INPUT DVI (or DVI Dual Link) Connector	Connect to the DVI (or DVI DUAL LINK) source
5	ON LED	Illuminates when receiving power

5 Connecting the VM-2DVI

To connect the **VM-2DVI**, do the following¹:

1. Connect a DVI source (for example, a computer) to the INPUT connector.
2. Connect the 2 OUTPUT connectors² to up to 2 DVI acceptors, as follows:
 - OUTPUT 1 connector to DVI acceptor 1 (for example, a DVI display)
 - OUTPUT 2 connector to DVI acceptor 2 (for example, a DVI projector)
3. Connect the 12V DC power adapter to the power socket and connect the adapter to the mains electricity.

¹ Switch OFF the power on each device before connecting it to your VM-2DVI. After connecting your VM-2DVI, switch on its power and then switch on the power on each device

² If you are using only one DVI acceptor, you should connect it to OUTPUT 1

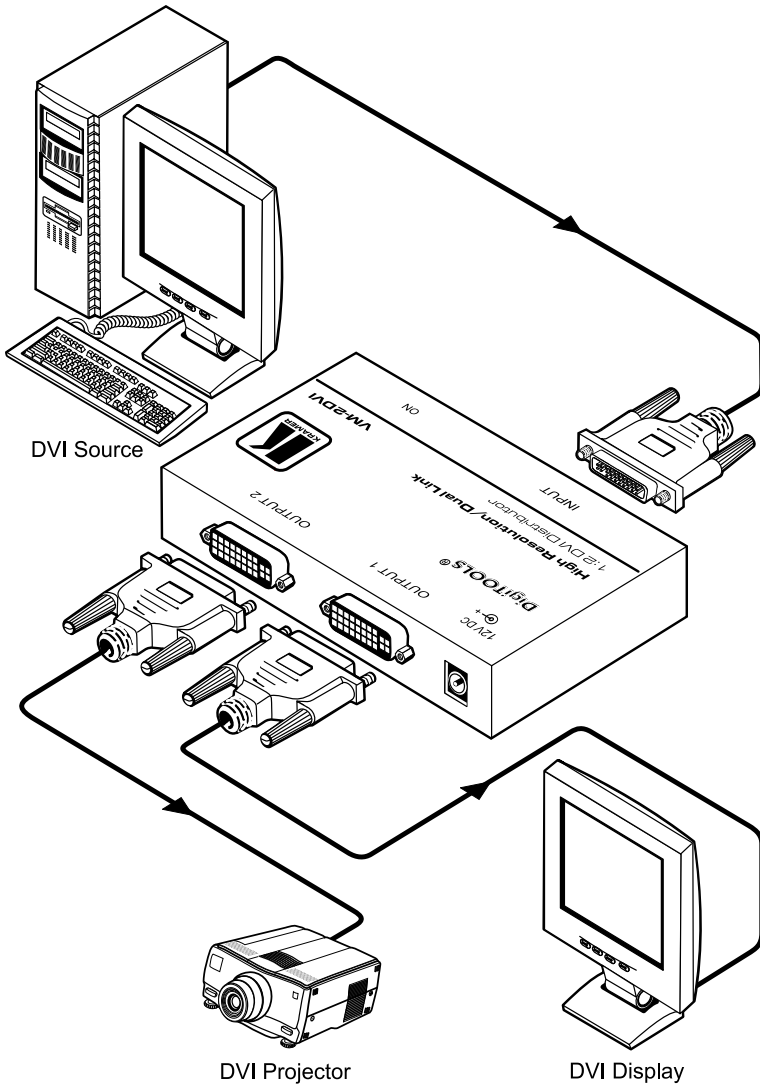


Figure 2: Connecting a VM-2DVI High Resolution / Dual Link 1:2 DVI Distributor

6 Technical Specifications

Table 2 includes the technical specifications:

Table 2: Technical Specifications¹ of the VM-2DVI

INPUT:	1 DVI ² , 1.2Vpp on a DVI Molex 24pin female connector; DDC signal 5Vpp (TTL)
OUTPUTS:	2 DVI ² , 1.2Vpp on DVI Molex 24pin female connectors; DDC signal 5Vpp (TTL)
DATA TRANSMISSION RATE:	>3.3Gbps
POWER SOURCE ³ :	12V DC, 390mA
DIMENSIONS:	12 cm x 7.5 cm x 2.5 cm (4.7" x 2.95" 0.98", W, D, H)
WEIGHT:	0.3 kg (0.67 lbs.) approx
ACCESSORIES:	Power Adapter

1 Specifications are subject to change without notice

2 On a DVI-I connector. Note that only the digital signal (DVI-D) is available on the DVI connector

3 If you wish to supply 5V to other DVI devices via the DVI connector on the VM-2DVI you need to use the Kramer 12V/2.1A SW PPS25W-13 EUR power supply (P/N: 2535-025120)

LIMITED WARRANTY

Kramer Electronics (hereafter *Kramer*) warrants this product free from defects in material and workmanship under the following terms.

HOW LONG IS THE WARRANTY

Labor and parts are warranted for seven years from the date of the first customer purchase.

WHO IS PROTECTED?

Only the first purchase customer may enforce this warranty.

WHAT IS COVERED AND WHAT IS NOT COVERED

Except as below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

1. Any product which is not distributed by Kramer, or which is not purchased from an authorized Kramer dealer. If you are uncertain as to whether a dealer is authorized, please contact Kramer at one of the agents listed in the Web site www.kramerelectronics.com.
2. Any product, on which the serial number has been defaced, modified or removed.
3. Damage, deterioration or malfunction resulting from:
 - i) Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature
 - ii) Product modification, or failure to follow instructions supplied with the product
 - iii) Repair or attempted repair by anyone not authorized by Kramer
 - iv) Any shipment of the product (claims must be presented to the carrier)
 - v) Removal or installation of the product
 - vi) Any other cause, which does not relate to a product defect
 - vii) Cartons, equipment enclosures, cables or accessories used in conjunction with the product

WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items. We will not pay for the following:

1. Removal or installations charges.
2. Costs of initial technical adjustments (set-up), including adjustment of user controls or programming. These costs are the responsibility of the Kramer dealer from whom the product was purchased.
3. Shipping charges.

HOW YOU CAN GET WARRANTY SERVICE

1. To obtain service on your product, you must take or ship it prepaid to any authorized Kramer service center.
2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage, and should be included in any shipment of the product. Please also include in any mailing a contact name, company, address, and a description of the problem(s).
3. For the name of the nearest Kramer authorized service center, consult your authorized dealer.

LIMITATION OF IMPLIED WARRANTIES

All implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

EXCLUSION OF DAMAGES

The liability of Kramer for any effective products is limited to the repair or replacement of the product at our option. Kramer shall not be liable for:

1. Damage to other property caused by defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or:
2. Any other damages, whether incidental, consequential or otherwise. Some countries may not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights, which vary from place to place.

NOTE: All products returned to Kramer for service must have prior approval. This may be obtained from your dealer.

This equipment has been tested to determine compliance with the requirements of:

- EN-50081: "Electromagnetic compatibility (EMC);
generic emission standard.
Part 1: Residential, commercial and light industry"
EN-50082: "Electromagnetic compatibility (EMC) generic immunity standard.
Part 1: Residential, commercial and light industry environment".
CFR-47: FCC Rules and Regulations:
Part 15: "Radio frequency devices
Subpart B Unintentional radiators"

CAUTION!

- Servicing the machines can only be done by an authorized Kramer technician. Any user who makes changes or modifications to the unit without the expressed approval of the manufacturer will void user authority to operate the equipment.
- Use the supplied DC power supply to feed power to the machine.
- Please use recommended interconnection cables to connect the machine to other components.



For the latest information on our products and a list of Kramer distributors, visit our Web site: www.kramerelectronics.com, where updates to this user manual may be found. We welcome your questions, comments and feedback.



Caution

Safety Warning:

Disconnect the unit from the power supply before opening/servicing.



Kramer Electronics, Ltd.

Web site: www.kramerelectronics.com

E-mail: info@kramerelectronics.com

P/N: 2900-00002 REV 2