RECESSED PAR38 V TRIMLESS

DESCRIPTION:

An adjustable PAR38 fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

2 - PAR38 lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. J-Box and wiring accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



Catalog #


Type

Project

COMBOLIGHT® LV Series

TWO (2) Light Recessed **Next Generation Trimless** Multi-Lamp Luminaire **PAR38 Line Voltage**

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
	23.50"	9.02"	17.73″	8.90"	14.65"	23.48"	16.85"	20.82" x 12.10"

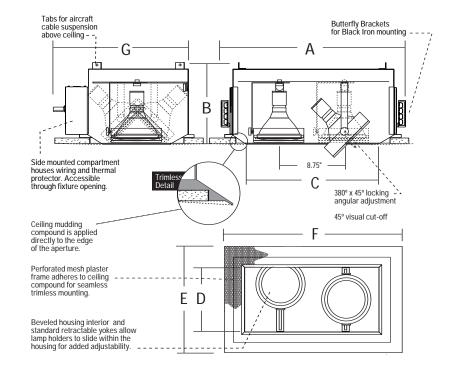



Other Adders

CC - Two Circuit CP - Chicago Plenum

ORDERING EXAMPLE: LV3800IS WH = Two Light Trimless Recessed PAR38 - White Interior

LV3800IS

Optional Accessories - Details on Other Side						
@	0					
Baffle	Snoots	Louvers	Lenses			

Cat. # / Description	Interior Finish		
LV3800IS: 2 Light Recessed Next Generation Trimless Combo Fixture 120V PAR38	BK - Black		
	WH - White		
	S - Silver		
	PT - Custom (Specify)		



SPECIFY -

