

RECESSED PAR38MH LV TRIMLESS

DESCRIPTION:

An adjustable PAR38MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

1 - PAR38MH lamp mounted in adjustable bezel. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Integral Aromat® electronic metal halide ballasts. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



Catalog #


Type

Project

COMBOLIGHT® LV Series

ONE (1) Light Recessed
Next generation Trimless
Single-Lamp Luminaire
PAR38 Metal Halide

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
	14.60"	9.02"	8.90"	8.90"	14.65"	14.65"	16.85"	12.10" x 12.10"

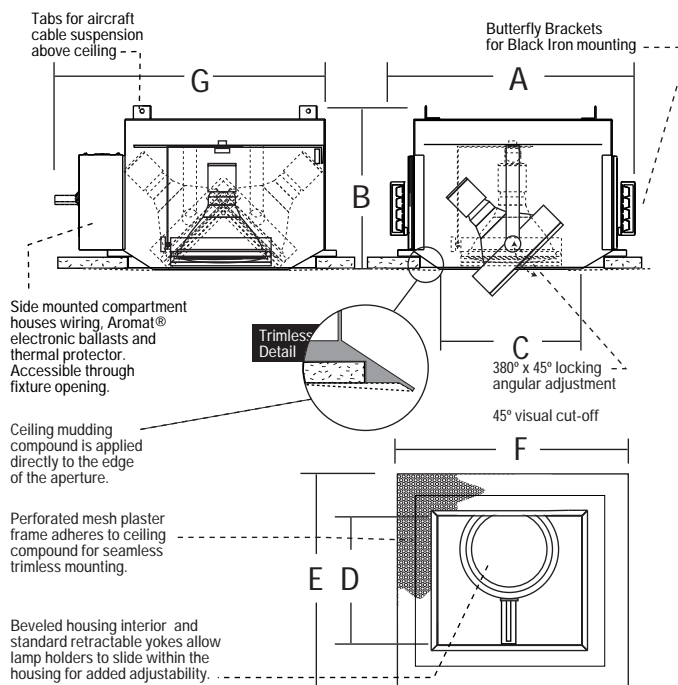

Includes Aromat® Electronic Metal Halide Ballasts



Other Adders
CC - Two Circuit
CP - Chicago Plenum

ORDERING EXAMPLE: LV810MH WH 70 120

= One Light Trimless Recessed PAR38MH - White Interior - 70 watt lamps - 120 Volt

Optional Accessories - Details on Other Side			
Baffle	Snoots	Louvers	Lenses

Cat. # / Description	Interior Finish	Lamp Wattage	Voltage
LV810MH : 1 Light Recessed Next Generation Trimless Combo Fixture PAR38MH	BK - Black	70 - 70 Watt PAR38MH	120 - 120 Volt (Standard)
	WH - White	100 - 100 Watt PAR38MH	277 - 277 Volt
	S - Silver		
	PT - Custom (Specify)		

SPECIFY -

LV810MH