

ZTE MF65+

Let's go

Getting Started With Your Device

LEGAL INFORMATION

Copyright © 2014 ZTE CORPORATION.

All rights reserved.

No part of this publication may be excerpted, reproduced, translated or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without the prior written permission of ZTE Corporation.

The manual is published by ZTE Corporation. We reserve the right to make modifications on print errors or update specifications without prior notice.

Version No.: R1.0


Edition Time: 4, 2014

Manual No.:079584506502

NOTE:

Do not use the device in an enclosed environment or where heat dissipation is poor. Prolonged work in such space may cause excessive heat and raise ambient temperature, which may lead to automatic shut-down of the device for your safety. In the case of such event, cool the device in a well-ventilated place before turning on for normal use.

2

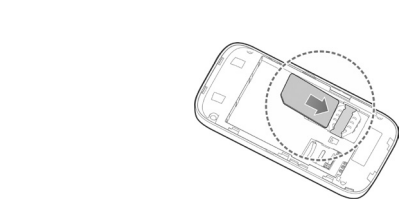


3. Install the battery.



4. Close the back cover.

5. (Optional) Install an SD card.

Install a microSDHC card to the microSDHC slot with the metal contacts facing down and slide it in, and then close the metal cover.

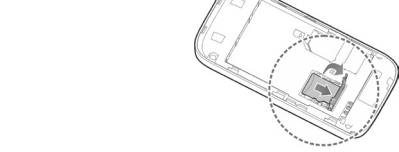


6

Getting to Know Your Device

Appearance

The following figure is for your reference only.

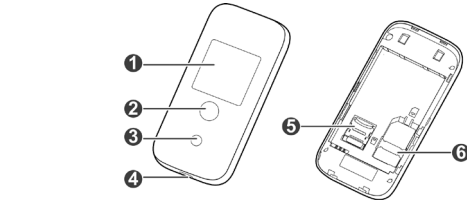

1. OLED screen
2. Power switch
3. WPS button
4. Micro USB port
5. microSDHC card slot
6. SIM (or USIM) card slot

NOTE:

- The microSDHC™ logo  is a trademark of SD-3C, LLC.
- You can hold the Power button and WPS button to reset the device.

Status icons


When the device is powered on, the following icons may be displayed on the OLED screen. For a description of the icons, refer to the following table.

3

Connecting Your Device

Using Wi-Fi

1. Power on your device.
2. Use the Wi-Fi application on a client to search for available wireless networks.

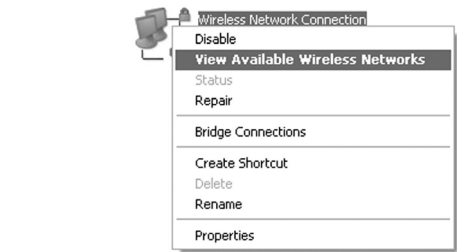

NOTE:

Set the client to obtain an IP address automatically. For the detailed procedure, refer to Configuring Your PC. The client gets an IP address, for example, 192.168.1.101.


7

Icon	Description
	Network signal strength.
2G/3G/4G	Network type. 2G, 3G and 4G icons will appear on the OLED screen according to the network being connected.
	The user is in roaming status.
	One or more new messages are received.
	Wi-Fi status and the number of connected users.
	Battery power.

Connection Scenario


The device can access the Internet in two ways and allows multiple clients to surf on the Internet at the same time. The following figure is for your reference only.

- **3G Mode:** A SIM or USIM card can be used to access the Internet.

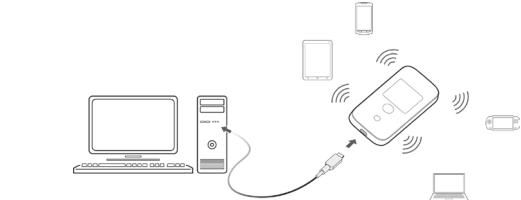

4


3. Select the SSID of your device, and then click **Connect**.

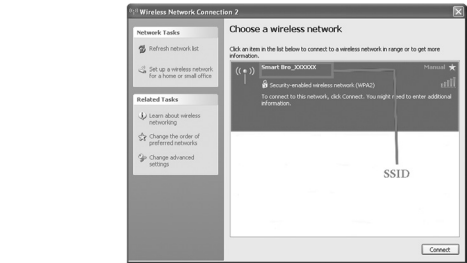

NOTE:

You can find the default SSID on the label of your device.

4. Enter the password, and then click **Connect**.

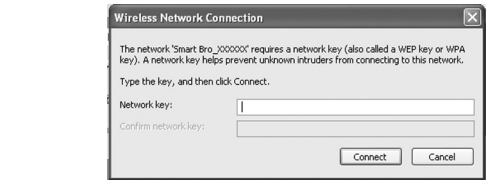

NOTE:


You may need to enter the password for the Wi-Fi connection. You can view the label on your device to get the default password.

8

- **Internet Wi-Fi Mode:** Your device will connect to other Wi-Fi device (hotspot device, wireless router, etc.) via Wi-Fi to access the Internet. The Wi-Fi device has already connected to the Internet.


NOTE:

Your device and the Wi-Fi device must be in different subnets.

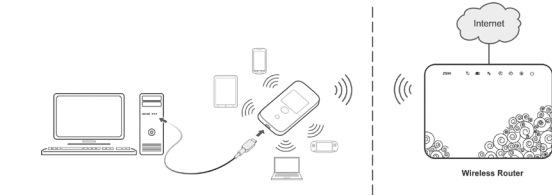

Installing Your Device

1. Slide the back cover and remove it.

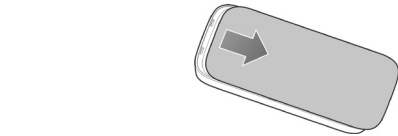


2. Install the SIM card.

IMPORTANT:

Your device does not support the Micro/Nano SIM card or any other nonstandard SIM cards. To avoid damaging the device, do not use those cards or any card holders.


5

5. Wait until the client is connected to your device successfully.

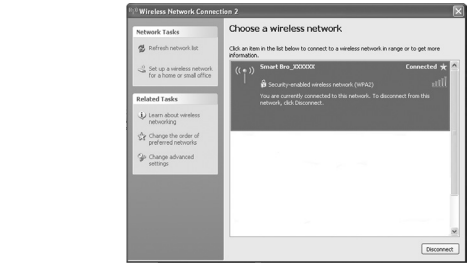

Using a USB Cable

1. Connect a client to your device through a USB cable.

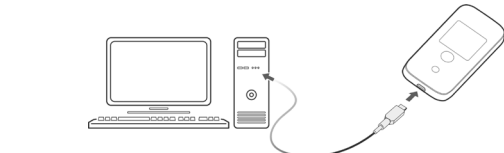

2. Power on your device. The operating system detects and identifies new hardware, and automatically finishes the installation.

NOTE:

If the system does not automatically launch installation, you can run the installation program in the My Computer/SMART BRO path.

3. Wait until the client is connected to your device successfully.

9

Accessing the Internet

3G Mode

After a client is successfully connected to your device, you can access the Internet in **Automatic** or **Manual** mode. The default mode is **Automatic**.

Mode	Operation
Automatic	Your device is automatically connected to the Internet, and you can surf the Internet through the client.
Manual	Log in to the webGUI configuration page, select Settings > Network Settings > Dial-up Settings > WAN Connection Mode > Manual , (To change current setting, please disconnect from network) and then click Connect .

NOTE:

To modify the parameters of your device, log in to the webGUI configuration page by visiting <http://192.168.1.1> or www.smartbrosettings.net. The default password is **smartbro**.

Internet Wi-Fi Mode

- Log in the webGUI configuration page.
- Select **Settings > Internet Wi-Fi**.
- Choose the **Internet Wi-Fi Switch**, and then click **Apply**.

NOTE:

You need to enable Internet Wi-Fi switch.



- Connect to the Wi-Fi device.

Select **Settings > Internet Wi-Fi**, choose the Wi-Fi hotspot you preferred, and the click **Connect**.

NOTE:

You can change the Wi-Fi device information in the **Wi-Fi Setting** area, and the click **Apply**.

You can also click  for more help.



- After the client connected to the Wi-Fi device successfully, you can access the Internet.

Configuring Your PC

The following procedure describes how to configure the Internet Protocol in the Windows XP operating system for your Wi-Fi connection.


- Right-click **My Network Places** and select **Properties**.




- Right-click **Wireless Network Connection** and select **Properties**.



- Select **Internet Protocol (TCP/IP)** and click **Properties**.



- Select **Obtain an IP address automatically** and **Obtain DNS server address automatically**, and click **OK**.



Using Your Device

- Use original accessories or accessories that are authorized. Using any unauthorized accessories may affect the performance of the device and violate the related national regulations about telecom terminals.
- Avoid using the device near or inside metallic structures or establishments that can emit electromagnetic waves, because signal reception may be affected.
- The device is not waterproof. Keep the device dry and store it in a shady and cool place.
- Do not use the device immediately after a sudden temperature change. In such case, dew may be generated inside and outside the device, so do not use it until it becomes dry.
- Handle the device carefully. Do not drop, bend or strike it. Otherwise the device may be damaged.
- Only qualified personnel can dismantle and repair the device.
- An operating temperature between 0°C and 40°C and a humidity between 5% and 95% are recommended.

Using the Battery

- Do not connect the battery in a short circuit, because a short circuit may cause excessive heat and fire.
- Do not store the battery in a hot area or put it in a fire. This avoids an explosion.
- Do not disassemble or modify the battery.

- If the battery is not used for a long period, remove it from your device and store it in a cool dry place.
- Never use a damaged charger and exhausted battery.
- Return the exhausted battery to the provider or put it in the appointed recycle place. Do not put it in familial rubbish.

WARNING:

If the battery is broken, keep away from it. If it taints your skin, wash your skin with abundant fresh water and ask doctor help if necessary.

Limited Warranty

- This warranty does not apply to defects or errors in the product caused by:
 - Reasonable abrasion.
 - End users' failure to follow ZTE's installation, operation or maintenance instructions or procedures.
 - End users' mishandling, misuse, negligence, or improper installation, disassembly, storage, servicing or operation of the product.
 - Modifications or repairs not provided by ZTE or a ZTE-certified individual.
 - Power failures, surges, fire, flood, accidents, and actions of third parties or other events outside ZTE's reasonable control.
 - Usage of third-party products, or usage in conjunction with third-party products if such defects are due to the combined usage.
 - Any other cause beyond the range of normal usage intended for the product.

End users have no right to reject or return the product, or receive a refund for the product from ZTE under the above-mentioned situations.

- This warranty is end users' sole remedy and ZTE's sole liability for defective or nonconforming items, and is in lieu of all other warranties, expressed, implied or statutory, including but not limited to the implied warranties of merchantability and fitness for a particular purpose, unless otherwise required under the mandatory provisions of the law.

Limitation of Liability

ZTE shall not be liable for any loss of profits or indirect, special, incidental or consequential damages resulting from or arising out of or in connection with using of this product, no matter whether or not ZTE had been advised, knew or should have known of the possibility of such damages, including, but not limited to lost profits, interruption of business, cost of capital, cost of substitute facilities or product, or any downtime cost.

Troubleshooting

Problem	Recommended Action
Failing to establish a connection between your device and a PC through a USB cable	- Install the software. Run the installation program in the My Computer/SMART BRO path - If the driver of your device is abnormal, uninstall and reinstall the software.
Failing to establish a connection between your device and a client through Wi-Fi	- Ensure that the Wi-Fi connection is work normally, and you cannot close it. - Refresh the network list and select the correct SSID. - Check the IP address, and ensure that your client can automatically obtain an IP address. - Enter the correct network key (Wi-Fi password) when you connect the client to your device.
The client connected to the device cannot access the Internet	- Ensure that your SIM card is available. - Change the location and find a place with good signal. - Check the setting of the WAN connection mode. - Contact your service provider and confirm your APN settings.

Warning and Notice

To the Owner

- If inadequately shielded, some electronic devices may be affected by the electromagnetic interference caused by the device, such as the electronic system of vehicles. Consult the manufacturers of such devices before using the device if necessary.
- Operating the device may interfere with medical instruments such as hearing aids and pacemakers. Always keep the device more than 20 centimeters away from such medical instruments when your device is turned on. Turn the device off if necessary. Consult a physician or the manufacturers of medical instruments before using the device if necessary.
- Be aware of the usage limitation when using the device at places such as oil warehouses or chemical factories, where there are explosive gases or explosive products being processed. Turn off the device if necessary.
- Do not use electronic transmission devices in aircrafts, at petrol stations or in hospitals. Observe and obey all warning signs, and turn off the device in these conditions.
- Do not touch the inner antenna area unless it is necessary. Otherwise the performance of the device may be affected.
- Keep the device out of the reach of little children. The device may cause an injury if used as a toy.
- When the device is operating, do not touch the metallic parts. Failing to do so may cause burns.

The client cannot access the Internet in AP mode	- Ensure that the Wi-Fi device has already been connected to the Internet. - Ensure that your device and the Wi-Fi device are in different subnets.
Failing to visit the webGUI configuration page	- Enter the correct address. The default address is http://192.168.1.1 or www.smartbrosettings.net. - Use only one network adapter in your PC. - Do not use any proxy server.
About the password	- For the Wi-Fi connection password, view the label on the device. - The SSID and Wi-Fi connection password are displayed on the screen. - The default password of the webGUI configuration page is smartbro. - If you changed the password and forgot the new password, you need to restore the device to the factory default settings.

You can get help by:

- Sending an E-mail to **mobile@zte.com.cn**
- Visiting **www.ztedevice.com**
- Calling the service hotline **+86-755-26779999**

€ 1588