

FAIL-SAFE®



DRX

7 W - 9 W
Fluorescent

2 0 W
Incandescent

WELDED STEEL
HIGH ABUSE
DARK ROOM SIGN




- Die-formed, 14 ga. CRS housing and door frame. All spot welded construction with weld bands at stress points for added strength. Black polyester powder coat finish
- Four captive, stainless steel tamper-resistant TORX® - head screws prevent unauthorized access
- Lamps by others
- One-piece, .125", polycarbonate sign panel secured between door frame and housing bulkhead by flush head thru studs. Lettering is silkscreened in optional letter/panel color combinations

DESCRIPTION


The sleek design of Fail-Safe's DRX Series dark room signage withstands the extreme abuses of hostile environments. Its 18 ga., die-formed, CRS housing utilizes a polycarbonate sign panel which is locked in place with heavy duty thru-studs. The door attaches to the housing with four tamper-resistant fasteners. Incandescent or fluorescent lamps power the unit for energy efficient, even illumination. Many other sign options available including "Open," "Closed," "Do Not Enter," "Caution," "X-Ray In Use", and the physically challenged symbol. U.L. listed, C.S.A. certified, standard damp label.

DIMENSIONS

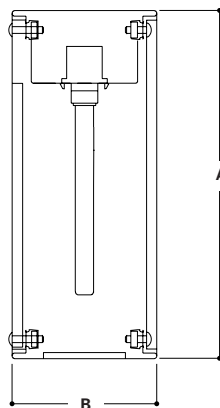


| A | B | C |
|---------|---------|---------|
| 9 3/8" | 4" | 12" |
| (238mm) | (102mm) | (305mm) |

FRONT VIEW



MOUNTING



ORDERING INFORMATION

SAMPLE NUMBER: DRX-F-2-RW-120

| | | | | | | | |
|-------------------------------|------------------------------------|--|---|---|--|--|--|
| Series DR=Dark Room | Product Family X=Signage | Lamp Type F=(2) 7-9W T twin Tube I=(2) 20W T6 Lamps | Face Options 1=Single Face 2=Double Face | Panel Colors RW=Red Letters on White Face WR=White Letters on Red Face GW=Green Letters on White Face WG=White Letters on Green Face | Voltage ¹ 120=120V 277=277V ² | Options HPF=High Power Factor Capacitor Correction Housing Finishes Blank=Black (Standard) BRZ=Bronze Finish WHT=White Finish | Accessories (Order Separately) VRSD=TORX® -Head Vandal Resistant Screwdriver 5460=End and Ceiling Mount Pedestal for "J" Box Mounting |
|-------------------------------|------------------------------------|--|---|---|--|--|--|

Note: Other signage available, consult Cooper Lighting Representative

NOTES: For additional options, consult your Cooper Lighting Representative. Specifications and Dimensions subject to change without notice.

¹ Products also available in non-US voltages and 50Hz for international markets. Consult your Cooper Lighting Representative for availability and ordering information. ² Incandescent 277V comes with stepdown transformer.