

ROCKTRON

RAMPAGE

R80DSP

*ELECTRIC GUITAR AMPLIFIER WITH
AGX TECHNOLOGY AND
BUILT-IN DIGITAL EFFECTS*

User's Manual

*May be covered by one or more of the following: U.S. Patents #4538297, 4647876, 4696044, 4745309, 4881047, 4893099, 5124657, 5263091, 5268527, 5319713, 5333201, 5402498 and 5493617.
Other patents pending. Foreign patents pending.*



Your Rocktron Rampage R80DSP amplifier has been tested and complies with the following Standards and Directives as set forth by the European Union:

Council Directive(s): 89/336/EEC, 73/23/EEC

Standard(s): EN55022, EN50082-1, EN60065

This means that this product has been designed to meet stringent guidelines on how much RF energy it can emit, and that it should be immune from other sources of interference when properly used. Improper use of this equipment could result in increased RF emissions, which may or may not interfere with other electronic products.

To insure against this possibility, always use good shielded cables for all audio input connections. This will help insure compliance with the Directive(s).

Precautions

NOTE: IT IS VERY IMPORTANT THAT YOU READ THIS SECTION TO PROVIDE YEARS OF TROUBLE FREE USE. THIS UNIT REQUIRES CAREFUL HANDLING.


- All warnings on this equipment and in the operating instructions should be adhered to and all operating instructions should be followed.
- Do not use this equipment near water. Care should be taken so that objects do not fall and liquids are not spilled into the unit through any openings.
- The power cord should be unplugged from the outlet when left unused for a long period of time.

DO NOT ATTEMPT TO SERVICE THIS EQUIPMENT. THIS EQUIPMENT SHOULD BE SERVICED BY QUALIFIED PERSONNEL ONLY. DO NOT MAKE ANY INTERNAL ADJUSTMENTS OR ADDITIONS TO THIS EQUIPMENT AT ANY TIME. DO NOT TAMPER WITH INTERNAL ELECTRONIC COMPONENTS AT ANY TIME. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY VOID THE WARRANTY OF THIS EQUIPMENT, AS WELL AS CAUSING SHOCK HAZARD.

OPERATING TEMPERATURE

Do not expose this unit to excessive heat. This unit is designed to operate between 32° F and 104° F (0° C and 40° C). This unit may not function properly under extreme temperatures.

Front Panel

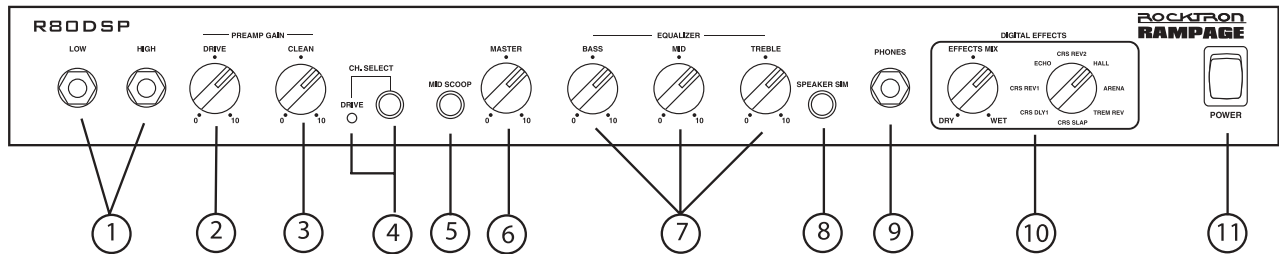

- ① INPUT JACKS - LOW AND HIGH**

Connect the output of your guitar to one of the 1/4" input jacks with a shielded guitar cable. Select LOW for normal, or HIGH for extra gain. Plugging into the LOW input will attenuate your guitar's signal cooling down a "hot" guitar. These two jacks provide slightly different input levels. Experiment with these and adjust to your tastes.
- ② PREAMP GAIN - DRIVE**

Turning this knob clockwise determines the amount of gain (or distortion) added to the signal.
- ③ PREAMP GAIN - CLEAN**

This knob controls the Clean Channel Level.
- ④ CH SELECT - Button & DRIVE LED**

Channel Select button - allows you to select between the DRIVE channel or the CLEAN channel. The DRIVE LED is ON (or lit) when the DRIVE channel is active.
- ⑤ MID SCOOP button**

Provides a fixed "scoop" of the mid frequencies for a "metal" sound.
- ⑥ MASTER - Volume Control**

The MASTER volume control adjusts the overall sound level.
- ⑦ TREBLE/MID/BASS controls**

Tone controls or EQ. The BASS control boosts or cuts the amount of low frequency, or bass sound. TREBLE does the same for high frequencies, MID adjusts the midband frequencies.
- ⑧ SPEAKER SIM Button**

Speaker Simulator - Press this button to engage the Speaker Simulator. This button has two functions

 - 1) When using headphones or the line out jack on the back panel engage the Speaker Simulator for a "model" of the internal speaker - this is ideal for direct recording or jamming along with CDs or tapes in the headphones.
 - 2) Engaging the Speaker Sim when you are NOT using headphones or the line out will provide a "creamier" tone to the EQ section. Experiment with this and select different pickups on your guitar...there is a wide range of tones available.

9

PHONE (HEADPHONE) jack

Plugging your headphones into this jack disconnects the sound going to the speakers and allows you to practice in private. Engage the Speaker Sim Button (Point 8) for a “model” of the internal speaker.

NOTE - When using with CD inputs be sure to turn the Levels down on both channels before unplugging headphones - see CD INPUT section next page.

10

DIGITAL EFFECTS section


Built-in digital effects custom voiced for Rampage amplifiers. Please see “Digital Effects” section in this manual for more descriptions of each sound and control operation.

11

POWER switch & LED

Turns the amp ON and OFF. When the LED is lit, the amp is on.

Digital Effects Section

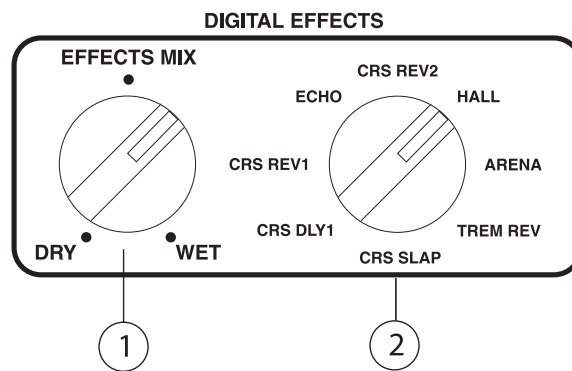

1

EFFECTS MIX Control

This control allows you to adjust how much effect is added to the signal. For louder effects - turn the knob towards the “WET” setting. For less or softer effect - turn the knob towards the “DRY Setting.


2

EFFECTS SELECT Control

This control allows you to select 8 different effect presets that have been custom made for guitar players. There are several different effects ranging from Chorus, Delays, Tremolo and Reverb and various combinations of those in the most popular configurations.

<u>EFFECT</u>	<u>DESCRIPTION</u>
CRS REV2	MEDIUM RATE CHORUS and STADIUM REVERB <i>HEAVY METAL MADNESS PRESET</i>
ARENA	LONG DECAYING REVERB with LIGHT EARLY REFLECTIONS <i>CLEAN SLOW SONG PRESET</i>
HALL	SHORT DECAYING REVERB with HEAVY EARLY REFLECTIONS <i>HEAVY ROCK AMBIENT PRESET</i>
TREMREV	MEDIUM DECAYING REVERB passing thru MEDIUM RATE TREMOLO <i>A KILLER SURF TONE PRESET</i>
CRS DLY1	SLOW RATE CHORUS with 232 ms DELAY light REGENERATION <i>80's METAL PRESET</i>
CRS REV1	SLOW RATE CHORUS and STADIUM REVERB <i>ROCK PRESET - GOOD FOR CLEAN AND DISTORTION - ACOUSTIC</i>
CRS SLAP	SLOW RATE CHORUS with 90ms DELAY light REGENERATION <i>COUNTRY CHICKEN PICKING PRESET/50'S STYLE PRESET</i>
ECHO	592ms LONG DELAY with heavy REGENERATION <i>MAJESTIC WAILING SOLO PRESET</i>

Back Panel

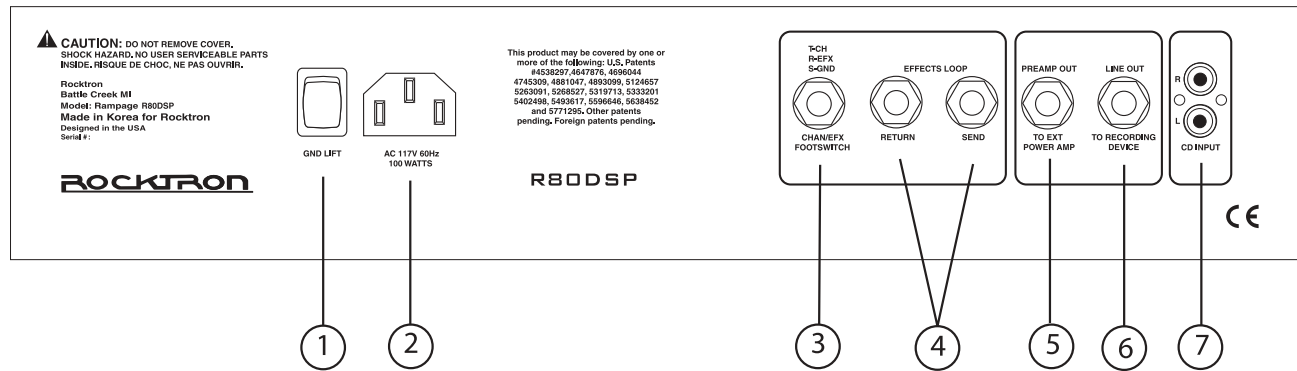

- ① **GND LIFT Switch**
This switch electrically references the chassis to correct the line phase in the instance where the AC wall outlet may not be properly grounded. Set the switch to the position that provides the least amount of “hum”.
- ② **POWER INLET Module**
The Power Inlet module accepts the detachable power cord included with the unit.
- ③ **CHAN/EFX FOOTSWITCH (Footswitch) Jack**
To control CHANNEL selection, plug a single footswitch* into this jack. To control CHANNEL Selection and DIGITAL EFFECTS ON/OFF, use a double footswitch* with a stereo 1/4” jack.
- ④ **EFFECTS LOOP - RETURN and SEND Jacks**
1/4” jacks allow you to connect an effects processor to the R80DSP. Plug a shielded guitar cable into the SEND jack of the R80DSP and into the INPUT on the effects processor. Use another shielded guitar cable from the OUTPUT of the effects processor to the RETURN jack on the R80DSP.
- ⑤ **PREAMP OUT - TO EXT POWER AMP**
This 1/4” jacks allows you to connect to a separate powered speaker cabinet or directly into a power amp - like the Rocktron Velocity 100 and from the power amp into two 4x12s, a stereo 4x12 or a stereo 2x12 cabinet. The preamp output is controlled by the master volume control.
- ⑥ **LINE OUT - TO RECORDING DEVICE**
This 1/4” jack allows you to connect to a PA system or recording device. The Speaker Simulator should be engaged for the best sound. You may also run the signal out to a power amp with volume controls and from there into a speaker cabinet. This output is ideal for direct connection to a PA system for live performances....it eliminates the need to use a microphone with the PA. The line output is not controlled by the master volume control.
- ⑦ **CD INPUTS**
These two RCA jack inputs allow for a direct connection by a CD player or Tape player to the amplifier. You can then jam along with CDs or tapes to rehearse songs, learn new songs or just for fun!

Warning!!! When using Headphones with the CD inputs - make sure you turn down the Levels on both channels BEFORE unplugging headphones - otherwise excessive CD volume will be produced.

* Rocktron Rampage single (RFS1) and double (RFS2) footswitches are available and sold separately.

R80DSP Specifications

Power Output		80 Watts
Speakers		12" Velocity High Definition by Rocktron
EQ	Treble Middle Bass	Active Shelving Active Bandpass Active Shelving
Outputs:	Line Preamp	1/4" jack 1/4" jack
Headphone Output		1/4" jack
Effects Loop		2 x 1/4" jack
Channels		Overdrive and Clean (Footswitchable)
Effects		Digital (Footswitchable)
Scoop		Bandstop
Dimensions		20"H x 12" W x 18"D (600x390x550mm)
Weight		38.38 lbs. (19kg.)
Power Requirements		100 Volts AC 50/60Hz or 117 Volts AC, 50/60Hz or 220/240 Volts AC, 50/60Hz, as specified on chassis

AGX (Automatic Gain Expander)

Rocktron's patented AGX system solves the long standing problem encountered by guitar players when using high gain distortion. The AGX circuit expands the gain of the amplification circuit only when required based on the input level. When no signal is present, the AGX circuit expands down the amplification level to a point where hum and noise are dramatically reduced.

Check out some of our other products:

Rack Gear:

Gainiac (*preamp w/12ax7 tube*) **Chameleon 2000** (*preamp w/multi-effects*)

Voodoo Valve (*preamp w/12ax7 tube and multi-effects*)

Prophecy (*our top of the line preamp with multi-effects*)

Intellifex On Line (*Multi-effects processor*) **HUSH Super C** (*guitar noise silencing system*)

Vendetta VP4 Preamp (*All Tube 4-Channel Guitar preamp - 2 Rack Space*)

Stomp Boxes:

Rampage Distortion, Tsunami Chorus, Austin Gold Overdrive,

HUSH The Pedal, Banshee Talkbox, Vertigo Vibe

Electric Guitar - Acoustic Guitar and Bass Amplifiers:

Vendetta Head (*100 W Head 4-Channels All Tube - MIDI Switchable*)

Vendetta Combo (*100W 2x12 Combo - Celestion 90's all Tube -4-Channel - MIDI Switchable*)

RT80 (*80W 1x12 Amp w/Reverb & Built-in Tuner*)

R120DSP (*120W 2x10 Amp w/Digital Effects*)

RT122C (*120W 2x12 Amp w/Stereo Chorus, Reverb & Chromatic Tuner*)

R50DSP (*40 Watt 2x8" Guitar Amp w/Digital Effects*)

R50C (*40 Watt 2x8" Guitar Amp w/Reverb & Chorus*)

R20 (*20 Watt 1x8" Amp w/Reverb*) **R10** (*10 Watt 1x6.5"*)

RA50DSP (*50W Acoustic Amp w/Digital Effects - Wedge Shape*)

RA30DSP (*30W Acoustic Amp w/Digital Effects - Wedge Shape*)

RB20 (*Bass Amp 20W with 8" Speaker*) **RB30** (*Bass Amp 30W with 10" Speaker*)

RB60 (*Bass Amp 60W with 12" Speaker*) **RB100** (*Bass Amp 100W with 15" Speaker*)

Foot Controllers:

MIDI Mate (*Midi Foot Controller*) **MIDI XChange** (*MIDI Footcontroller*)

All Access (*Midi Foot Controller*) **RMM900** (*7-pin Din MIDI Cable*)

RFS1 and RFS2 (*Single and Double Latching Footswitchs for Rampage Amps*)

Speaker Cabs:

S112 (*1x12 Voiced Guitar Cab*) **Vendetta 4x12s** (*Slant & Straight w/ Celestion 30s*)

ROCKTRON

RAMPAGE

R80DSP

*ELECTRIC GUITAR AMPLIFIER WITH
AGX TECHNOLOGY AND
BUILT-IN DIGITAL EFFECTS*

Rocktron -A Division of GHS Corporation

2813 Wilber Avenue

Battle Creek MI 49015

USA

Rocktron Phone: 1-(269)-968-3351

Email: info@rocktron.com