

Construction

20-gauge steel housing. (2'x2' or 2'x4')

Shielding

Perforated metal backed by a white acrylic diffuser.

Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish

Durable, low gloss, white, powder coated acrylic finish.

Mounting

Recessed.

ORDERING INFORMATION:

Sample number: 222R-1BX40W-ETG-1EB-SI-EM

Series

222=2'x2' 224=2'x4'

Options ²

A=Air Return T=Tannenbaum Reflector
C=Chicago Plenum

Mounting

R=Recessed

Number of Lamps (not included)

2=2 Lamps

Lamp Type ¹

T8 (224) T5 T5H0 BX40W BX50W

Ceiling Type

ETG=Exposed T-Grid STG=Slot T-Grid (Sheet Metal)
SR=Sheet Rock (Flanged)

Voltage ¹

1=120V 2=277V 3=347V U=Universal

Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast


Switching

SI=Single Switching DU=Dual Switching

Emergency

EM=Emergency Pack (Consult Factory)

¹ Due to various constraints, some options may not be combined with others.
² Can be left blank or more than one option may be available, consult factory.





FENESTRA 224 222




DIRECT-INDIRECT

- Direct - ambient light distribution.
- Flush center split basket design.
- T5, long twin tube and T8 lamping.
- Low glare direct-indirect illumination.
- Uniform fixture luminance at most viewing angles.
- Housings fit all ceiling types with ultra minimal exposed trim.
- Tannenbaum ribbed aluminum reflector option available.
- Air return and Chicago plenum options available.

STANDARD LUMINAIRE PLAN - VIEW - VIEW

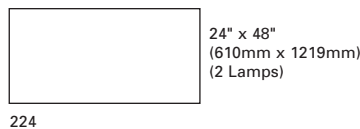

MOUNTING INFORMATION



NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.