



NEO-RAY™



FENESTRA 234 232

DIRECT-INDIRECT

- Direct - ambient light distribution.
- Flush center louver/basket design.
- T5, long twin tube and T8 lamping.
- Direct, low glare illumination.
- Housings fit all ceiling types with ultra minimal exposed trim.
- Tannenbaum ribbed aluminum reflector option available.
- Air return and Chicago plenum options available.

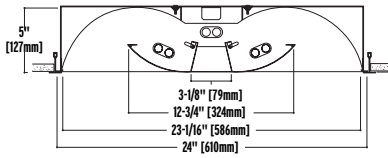

Construction

20-gauge steel housing. (2'x2' or 2'x4')

Shielding

Perforated metal panels backed by a white acrylic diffuser.

Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish

Durable, low gloss, white, powder coated acrylic finish.

Mounting

Recessed.

ORDERING INFORMATION:

Sample number: 232R-2BX40W-ETG-2EB-SI

Series

232=2'x2' 234=2'x4'

Options ²

A=Air Return T=Tannenbaum Reflector
C=Chicago Plenum

Mounting

R=Recessed

Number of Lamps (not included)

2=2 Lamps 3=3 Lamps

Lamp Type

T8 (234) T5 T5HO BX40W BX50W

Ceiling Type

ETG=Exposed T-Grid STG=Slot T-Grid
SR=Sheet Rock (Flanged)

Voltage ¹

1=120V 2=277V 3=347V U=Universal

Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast

Switching

SI=Single Switching DU=Dual Switching

Emergency

EM=Emergency Pack (Consult Factory)

Shielding

SFB=Frosted Baffle
SIB=Blue Ice Baffle

¹ Due to various constraints, some options may not be combined with others.
² Can be left blank or more than one option may be available, consult factory.

STANDARD LUMINAIRE PLAN - VIEW



24" x 24"
(610mm x 610mm)
(2 or 3 Lamps)


232




24" x 48"
(610mm x 1219mm)
(2 or 3 Lamps)

234


MOUNTING INFORMATION



ETG
EXPOSED TEE GRID



STG
SLOT TEE GRID



SR
SHEET ROCK

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.