




PROGRAMMING USING SET

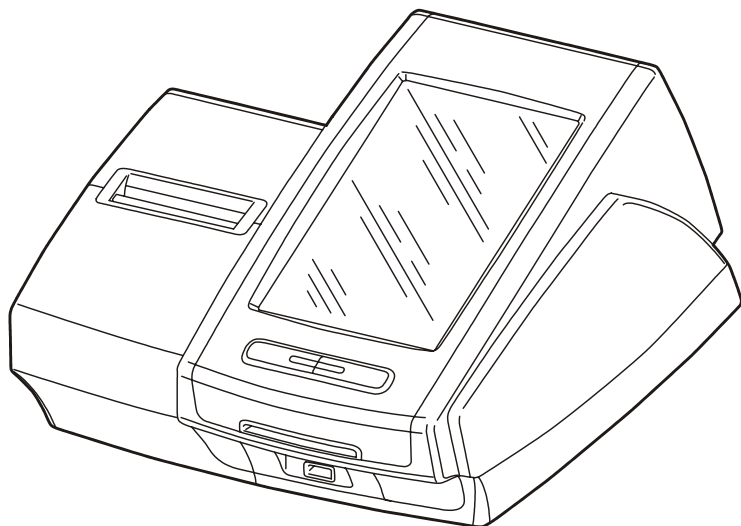

NETTUN@3000^{int'l}
CASH REGISTER

Publication issued by:

Olivetti S.p.A.
Telecom Italia Group
Via Jervis, 77 - 10015 Ivrea (TO)

*Copyright © 2014, by Olivetti
All rights reserved.*

This manual describes the CRF3000 cash register sold with the name NETTUN@3000^{int'l}.

The manufacturer reserves the right to carry out modifications to the product described in this manual at any time without any notice.

The quality requirements of this product are attested
through display of  marking on the product.



Your attention is drawn to the following actions which could compromise the conformity attested to above and also product characteristics:

- incorrect power supply;
- incorrect installation, incorrect or improper use or use not in compliance with the warnings provided in the User's Manual furnished with the product;
- replacement of original components or accessories with others of a type not approved by the manufacturer, or performed by unauthorised personnel

User Safety

Connect the machine to a nearby and readily accessible current outlet.

Access the print unit area only to replace accessories. Do not use the machine above or close to sources of heat (e.g. radiators) or very close to water (e.g. swimming-pools or showers).

To effectively disconnect the appliance, remove the plug of the power cord from the current outlet. To clean the machine, disconnect it from the current outlet, use a damp cloth. Do NOT use corrosive liquids.

CONTENTS

PROGRAMMING USING SET

PROGRAMMING LIST	3
SET 102 – FORMAT MEMORY	4
SET 150 - DISPLAY TILL TOTAL AMOUNT	9
SET 151 – SET MACHINE DATE AND TIME	10
SET 152 – CHANGE AUTOMAT. DATE & TIME	11
SET 154 – RESET REGISTER GT	11
SET 155 - ACTIVATE OBLIGATORY INVOICE HEADING FOR INVOICE	11
SET 157 – ENABLING RESCUE REPORTS	11
SET 160 - LANGUAGE SELECTION	12
SET 162 – ROUNDING TYPE SELECTION	13
SET 171 – SET TICKET GRAN TOTAL PARAMETRES	13
SET 200 - PRINT SERIES 200 OPTIONS LIST	13
SET 201 - SET UP MERCHANDISE ICONS	14
SET 203 - SET UP POINT ICONS	15
SET 206 - SET UP PUBLIC HOLIDAY ICONS	15
SET 297 - PRINT LIST OF ICON-PHRASE COMBINATIONS	
SET 298 - PRINT LIST OF MERCHANDISE PHRASES	
SET 299 - PRINT LIST OF MERCHANDISE ICONS	17
SET 300 - PRINT SERIES 300 OPTION LIST	17
SET 301 - SET MACHINE CODE	17
SET 302 - SET UP HEADING LINES	18
SET 303 - SET UP COURTESY PHRASES	19
SET 304 - SET PAYMENT MODE PARAMETERS	20
SET 305 - SET GROUP DESCRIPTORS	22
SET 306 - ENABLE OBLIGATORY EXECUTION OF DAILY REPORT	22
SET 307 - SET UP DISCOUNT TABLE	23
SET 308 - SET VAT RATES	24
SET 309 - SET PERCENT MARKUP PARAMETERS	25
SET 310 - SET MONEY ORDER DESCRIPTOR	26
SET 311 - SET HALO VALUE FOR CHANGE	26
SET 314 - PRINT MACHINE CONFIGURATION	27
SET 315 – X MODE AUTOMATIC REPORT MANAGEMENT	
SET 316 - Z MODE AUTOMATIC REPORT MANAGEMENT	28
SET 318 - ENABLE OBLIG. CALCULATION OF CHANGE	29
SET 320 - SELECT COURTESY MESSAGE TYPE	29
SET 321 - ENABLE ZERO PRICE	30
SET 322 - SELECT MACHINE FONT	30
SET 324 - SELECT VAT DETAILS	31
SET 329 - ENABLE SINGLE ITEM SALES	32
SET 332 – GENERATION QR CODE	32
SET 338 - SET HEADER LINES FOR INVOICE	33
SET 339 - SET SIMPLIFIED INVOICE PARAMETERS	33
SET 340 - SET WEEE GENERIC MESSAGE DESCRIPTORS	34

SET 341 - SET WEEE MESSAGE VALUE DESCRIPTORS	34
SET 342 - SET PROFORMA RECEIPT MESSAGE	35
SET 345 – SAVE DATABASE DATA AND DEF. SETTINGS	36
SET 346 – RESTORE DATABASE DATA AND DEF. SETTINGS	38
SET 347 - RESET BCR PLU DATA	39
SET 348 - SAVING THE USER CONFIGURATION (DATABASE) OF THE CASH REGISTER	40
SET 349 - RESTORING THE USER CONFIGURATION (DATABASE) OF THE CASH REGISTER	41
SET 350 - MAKING A SECURITY (BACKUP) COPY OF THE CASH REGISTER ON A USB PEN	42
SET 351 - RESTORE USER DATA	43
SET 352 - SELECT ADD MODE TYPE	44
SET 355 - ENABLE CUTTER	44
SET 356 - ENABLE ACOUSTIC WARNING FOR BARCODE READER	45
SET 358 - ENABLE REPORT SAVING ON EJ	45
SET 359 - ENABLE BCR PRINTING	45
SET 360 - ENABLE PASSWORD MANAGEMENT	46
SET 361 - SET SUPERVISOR PASSWORD	46
SET 362 - SET CASHIER PASSWORD	47
SET 363 - SELECT NO. TICKETS ON EJ TO PRINT	47
SET 364 - SELECT TYPE AND THRSOLD. VALUE FOR EJ END	47
SET 365 - SAVE ALL TICKETS ON EJ	48
SET 366 - ENABLE MULTIPLE TICKETS	48
SET 367 - ENABLE PRINTING OF ARTICLES SOLD	48
SET 368 - ENABLE TILL TOTAL DISPLAY	49
SET 370 - ENABLE OPERATORS	49
SET 371 - ENABLE CUSTOMER ACCOUNTS	49
SET 372 - SET OFFER VALUES	50
SET 375 - PRINT TICKET INFORMATION	50
SET 380 - WAIT FOR DISPLAY SWTCH-OFF	50
SET 389 - ENABLE CHIPCARD MANAGEMENT	51
SET 390 - PRINT SERIES 390 OPTIONS LIST	51
SET 391 - CHIPCARD FORMATTING MANAGEMENT	51
SET 392 - CHIPCARD PROGRAMMING INFORMATION	52
SET 393 - CHIPCARD DELETION	54
SET 394 - CHIPCARD DUPLICATION	54
SET 395 - CHIPCARD CODE MANAGEMENT	55
SET 396 - DEALER CHIPCARD CODE MANAGEMENT	55
SET 397 - WALLET CHIPCARD CODE MANAGEMENT	56
SET 398 - CHIPCARD PNTS MANAGEMENT	56
SET 399 - CHIP CARD LOADING MANAGEMENT	56
SET 400 - PRINT SERIES 400 OPTIONS LIST	56
SET 401 - SET INFORMATION FOR EACH DEPARTMENT	57
SET 451 - PRINT INFORMATION OF ALL EJ USED BY MACHINE	59
SET 452 - PRINT TICKET SELECTED BY NUMBER	59
SET 453 - PRINT TICKETS OF A GIVEN DATE	59

SET 454 - PRINT TICKETS COMPRISED BETWEEN TWO NUMBERS	60
SET 455 - PRINT TICKETS COMPRISED BETWEEN TWO DATES	60
SET 458 - FULL PRINTING OF EJ.....	61
SET 459 - EJ DELETION.....	61
SET 460 - PRINT CURRENT EJ INFORMATION	61
SET 461 - EJ FREE SPACE MANAGEMENT	61
SET 510 - PRINT SERIES 510 OPTIONS LIST	61
SET 600 - PRINT SERIES 600 OPTIONS LIST	62
SET 601 - SET INFORMATION FOR EACH OPERATOR	62
SET 650 - PRINT SERIES 650 OPTIONS LIST	63
SET 651 - SET INFORMATION FOR EACH ACCOUNT.....	63
SET 652 - DELETE CUSTOMER ACCOUNT INFORMATION.....	63
SET 653 - DELETE INFORMATION OF MORE THAN ONE ACCOUNT	64
SET 654 - DELETE ALL CUSTOMER ACCOUNTS.....	64
SET 800 - PRINT BCR PLU INFORMATION READ AS CODE	65
SET 801 - FORMAT BCR PLU AREA	69
SET 802 - INSERT NEW BCR PLU.....	70
SET 803 - DELETE BCR PLU	71
SET 804 - MODIFY BCR PLU	72
PROGRAMMING THE SERIAL INTERFACES	73
SET 900 - PRINT SERIES 900 OPTIONS LIST	73
SET 901 - SET SERIAL CHANNEL 1 INFORMATION	
SET 903 - SET SERIAL CHANNEL 2 INFORMATION.....	74
SET 902 - LOADING SERIAL CHANNEL 1 DEVICE	
SET 904 - LOADING SERIAL CHANNEL 2 DEFAULT.....	75
SET 905 - SERIAL DEVICE CONFIGURE	75
SET 906 - ENABLE USB CONNECTION	75
SET 919 - ENABLE NETWORK SERVICES (OPTIONAL SETTINGS).....	76
SET 920 - ETH ACTIVATION PARAMETERS (OPTIONAL SETTINGS)	76
SET 921 - CHANNEL 1 ETH SETTINGS	
SET 922 – CHANNEL 2 WLAN SETTINGS	
SET 923 – PPP SETTINGS	
SET 924 – WIFI SETTINGS	
SET 925 – ADSL SETTINGS	
SET 926 – FTP SETTINGS	
SET 927 – SNMP SETTINGS	
SET 928 – HSDPA SETTINGS	
SET 929 – VPN SETTINGS	
SET930 - ETH ADVANCED SETTINGS (OPTIONAL SETTINGS)	77
SET 931 - SELECT FW UPDATE MODE (OPTIONAL SETTINGS).....	77
SET 931 - SELECT FW UPDATE MODE (OPTIONAL SETTINGS).....	78
SET 932 - SELECT DB UPDATE MODE (OPTIONAL SETTINGS)	78
SET 933 – TEST NETWORK (OPTIONAL SETTINGS)	78
SET 950 – SET SLIP PRINTER INFORMATION	
SET 951 - CALIBRATE SLIP PRINTER MODULE	79


APPENDIX

ICON CLASSIFICATIONS AND LIST OF PROMOTIONAL PHRASES

A-1

1. PROGRAMMING USING SET

The cash register can be programmed from the Programming environment accessible from the main Sales screen by selecting **[F] (Functions)> GENERAL FUNCTIONS** environment followed by the **[Config] > [Set setup]** key.

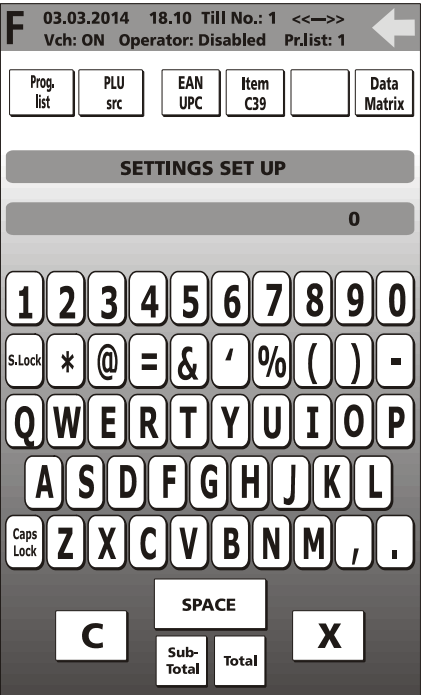

To:	
perform programming	set the related parameter as described in the following pages.
confirm the setting made and pass to the next parameter	press X
skip programming and pass directly to the next parameter	press X
cancel the setting	press C
exit from the programming environment without saving the programming changes	press < without confirming with X
confirm the settings made and return to the start of the SET mode	press Total
cancel an error message	press C
when programming a department field, skip to the next department to program the same field	Press Subtotal

When **programming sales prices**, the decimal separator is inserted automatically when you enter amounts consisting of whole figures. On the other hand, the decimal separator must be entered manually for amounts with decimal figures.

ERROR MESSAGES

The error messages listed here are those that appear most frequently when using Programming mode.

MESSAGE	MEANING
EXCEEDED CAPACITY	The values set exceed the number of figures allowed.
OVER MAX. LIM.	The value set is not included among the permitted values.
SEQUENCE ERROR	The key pressed is not allowed.
NOT ALLOWED	The operation requested is not allowed.

PROGRAMMING LIST

With the **[Sets List]** key, you can display a list of all the functions available on the register for programming, and the code to use for enabling the function.

F03.03.2012 18.10 Till No.: 1
Vch: ON Pr.list 1 Operator: Disabled

PROGRAMMING LIST

Code	Description
102	Format machine data
150	Display till total amount
151	Set machine date and time
152	Change automat. date & time
154	Reset register GT
155	Activate obligatory invoice heading for invoice
160	Language selection
161	Activate obligatory Shared Account for invoice
162	Rounding type selection
170	Training mode
200	Print Series 200 options list
201	Set up merchandise icons
203	Set up point icons
206	Set up public holiday icons
297	Print list of icon-phrase combinations
298	Print list of merchandise phrases
299	Print list of merchandise icons
300	Print series 300 option list
301	Set machine code
302	Set up heading lines
303	Set up courtesy phrases
304	Set payment mode parametres
305	Set group descriptors

Note: The programming functions that can be used by the user are listed below.

EXECUTING THE SET COMMAND FROM THE PROGRAMMING LIST

A command can be selected from **F (Functions) > General Functions** environment **> Config > Set setup > [Program. List]**.

From the list of SET programming commands you can execute a command directly by simply touching the command line or its description followed by the **Exec** key with, therefore, direct access to the programming environment.

SET 102 – FORMAT MEMORY

Formatting the memory

Using Code 102 you can format the memory of the cash register. This means that in programming mode the memory can be divided into logical areas of size and number to meet the needs of the user. In particular, you can configure the basic number of parameters required for carrying out sales activities (number of merchandise categories, departments, PLUs, operators, etc.) and choose the lengths of each of their descriptors.

For each of these entities you can also decide whether or not to enable a series of options available on the machine. For example, you can choose whether or not to set a maximum or minimum sales amount for all departments (other codes described in the following pages allow you to program maximum or minimum amounts specifically for each department).

The total capacity of the memory available, however, is not sufficient to support contemporarily programming of the maximum values for all parameters. Therefore, while programming with Code 102, from time to time, configuration of certain parameter values may result in warnings of memory capacity exceeded.

Code 102 General Guidelines

Key [X] : confirms parameter programming and allows you to scroll sequentially through all the information.

Key [TOTAL] : exits from the option without saving the parameter settings and without formatting the databases, maintaining the previous configuration.

Key [SUBTOTAL] : memorises the parameters modified and, from any position, switches to DB formatting that the user can choose whether or not to perform.

Procedure entry: confirmation may be requested before proceeding.

Before formatting is performed, the user is requested for final confirmation.

Operating procedure

1. Formats the memory of the cash register. In programming mode, you can divide the memory into logical areas of varying sizes and number according to your specific needs. The position for entering the first character is highlighted on the operator display.
2. **[PROGRAM DEPARTMENTS]**
3. **[NUMERIC CHARACTERS]** To program the number of departments from 1 to 250.
4. To confirm the data entered and continue to set the next parameter.
5. **[NUMERIC CHARACTERS]** To program the number of price lists from 1 to 4.
6. To confirm the data entered and continue to set the next parameter.
7. **[NUMERIC CHARACTERS]** To program the length of the descriptor from 0 to 29.
8. To confirm the data inserted and continue to set the next parameter
9. **[NUMERIC CHARACTERS]** To program link to GROUP to 1/0.
10. To confirm the data entered and continue to set the next parameter.
11. **[NUMERIC CHARACTERS]** To program a HALO to 1/0.
12. To confirm the data entered and continue to set the next parameter.
13. **[NUMERIC CHARACTERS]** To program a LALO to 1/0.

14. ☒ To confirm the data entered and continue to set the next parameter.
15. **[NUMERIC CHARACTERS]** To program OFFER link to 1/0.
16. ☒ To confirm the data entered and continue to set the next parameter.
17. **[NUMERIC CHARACTERS]** To program periodic 2 to 1/0.
18. ☒ To confirm the data entered and continue to set the next parameter.
19. **[PROGRAM INTERNAL PLUs]**
20. **[NUMERIC CHARACTERS]** To program the number of PLUs from 0 to 250.
21. ☒ To confirm the data entered and continue to set the next parameter.
22. **[NUMERIC CHARACTERS]** To program the length of the descriptor from 0 to 29.
23. ☒ To confirm the data entered and continue to set the next parameter.
24. **[NUMERIC CHARACTERS]** To program the KEYPAD DIM., NUMBER OF KEYS (250), DESCR LENGTH (24).
25. ☒ To confirm the data entered and continue to set the next parameter.
26. **[PROGRAM PAYMENT FORMS]**
27. **[NUMERIC CHARACTERS]** To program the length of the DESCRIPTOR from 0 to 29.
28. ☒ To confirm the data entered and continue to set the next parameter.
29. **[NUMERIC CHARACTERS]** To program the number of CURRENCIES from 0 to 10.
30. ☒ To confirm the data entered and continue to set the next parameter.
31. **[NUMERIC CHARACTERS]** To program the number of CREDIT CARDS from 0 to 10.
32. ☒ To confirm the data entered and continue to set the next parameter.
33. **[NUMERIC CHARACTERS]** To program the number of VOUCHERS from 0 to 15.
34. ☒ To confirm the data entered and continue to set the next parameter.
35. **[NUMERIC CHARACTERS]** To program the number of CUTS from 0 to 15.
36. ☒ To confirm the data entered and continue to set the next parameter.
37. **[NUMERIC CHARACTERS]** To program periodic 2 to 1/0.
38. ☒ To confirm the data entered and continue to set the next parameter.

39. [PROGRAM OPERATORS]

40. [NUMERIC CHARACTERS] To program the number of OPERATORS from 0 to 10.
41. ☒ To confirm the data entered and continue to set the next parameter.
42. [NUMERIC CHARACTERS] To program the descriptor length from 0 to 16.
43. ☒ To confirm the data entered and continue to set the next parameter.
44. [NUMERIC CHARACTERS] To program the length of the personal code from 0 to 4.
45. ☒ To confirm the data entered and continue to set the next parameter.
46. [NUMERIC CHARACTERS] To program periodic 2 to 1/0.
47. ☒ To confirm the data entered and continue to set the next parameter.
48. [PROGRAM OFFERS]
49. [NUMERIC CHARACTERS] To program the number of OFFERS from 0 to 9.
50. ☒ To confirm the data entered and continue to set the next parameter.
51. [NUMERIC CHARACTERS] To program the descriptor length from 0 to 29.
52. ☒ To confirm the data entered and continue to set the next parameter.
53. [NUMERIC CHARACTERS] To program periodic 2 to 1/0.
54. ☒ To confirm the data entered and continue to set the next parameter.
55. [PROGRAM DISCOUNTS AND MARKUPS]
56. [NUMERIC CHARACTERS] To program the number of percent discounts from 0 to 9.
57. ☒ To confirm the data entered and continue to set the next parameter.
58. [NUMERIC CHARACTERS] To program number of absolute discounts from 0 to 9.
59. ☒ To confirm the data entered and continue to set the next parameter.
60. [NUMERIC CHARACTERS] To program the number of percent markups from 0 to 9.
61. ☒ To confirm the data entered and continue to set the next parameter.
62. [NUMERIC CHARACTERS] To program the number of absolute markups. The number of markups can vary from 0 to 9.
63. ☒ To confirm the data entered and continue to set the next parameter.
64. [NUMERIC CHARACTERS] To program the descriptor length from 0 to 15.
65. ☒ To confirm the data entered and continue to set the next parameter.

66. **[NUMERIC CHARACTERS]** To program periodic 2 to 1/0.
67. ☒ To confirm the data entered and continue to set the next parameter.
68. **[PROGRAM GROUPS]**
69. **[NUMERIC CHARACTERS]** To program the number of groups from 0 to 30.
70. ☒ To confirm the data entered and continue to set the next parameter.
71. **[NUMERIC CHARACTERS]** To program the descriptor length from 0 to 29.
72. ☒ To confirm the data entered and continue to set the next parameter.
73. **[NUMERIC CHARACTERS]** To program periodic 2 to 1/0.
74. ☒ To confirm the data entered and continue to set the next parameter.
75. **[PROGRAM VAT RATES]**
76. **[NUMERIC CHARACTERS]** To program the descriptor length from 0 to 29.
77. ☒ To confirm the data entered and continue to set the next parameter.
78. **[NUMERIC CHARACTERS]** To program CUSTOMER DIM., NO. CUSTOMERS (200), DESCR. LENGTH (29), PERIOD. 2 REG. (1)
79. ☒ To confirm the data entered and continue to set the next parameter.
80. **[NUMERIC CHARACTERS]** To program the WEEE eco-contribution to 1/0.
81. ☒ To confirm the data entered and terminate programming with SET 102.

Note: on terminating programming using option 102 - after you have performed successfully the selection and memory formatting procedures - a ticket is automatically printed containing a list of all the settings (the same as can be printed using option 314), so that you can retain a trace of the settings made.

Factory Settings Table

Programmable parameters - DEPTS	Range	Factory setting
Number of departments	1-250	250
Number of price lists	1-4	4
Descriptor length	0 - 29	24
GROUP link	1/0	1
HALO	1/0	1
LALO	1/0	1
OFFER link	1/0	0
Periodic 2	1/0	1

Programmable parameters – INT. PLUs	Range	Factory setting
Number of PLUs	0-250	250
Number of price lists	0-29	24

Keypad	Range	Factory setting
Number of keys	0-250	250
Descriptor	1-24	24

Programmable parameters - PAYMENT FORMS	Range	Factory setting
Descriptor length	0-29	24
Number of currencies	0-10	5
Number of credit cards	0-10	5
Number of vouchers	0-20	15
Number of companies	0-99	15
Number of cuts	0-999	15
Periodic 2	1/0	1

Programmable parameters - OPERATORS	Range	Factory setting
Number of operators	0	10
Descriptor length	0-29	16
Personal code length	0 - 4	4
Periodic 2	1/0	1

Programmable parameters - OFFERS	Range	Factory setting
Number of offers	0 - 9	5
Descriptor length	0-29	24
Periodic 2	1/0	1

Programmable parameters - DISCNTS & MRKUPS	Range	Factory setting
Number of percent discounts	0 - 9	6
Number of absolute value discounts	0 - 9	6
Number of percent markups	0 - 9	6
Number of absolute value markups	0-9	6
Descriptor length	0-29	15
Periodic 2	1/0	1

Programmable parameters - GROUPS	Range	Factory setting
Number of groups	0 -30	30
Descriptor length	0-29	24
Periodic 2	1/0	1

Programmable parameters - VAT RATES	Range	Factory setting
Descriptor length	0 -29	24

CUSTOMER Dimension	Range	Factory setting
Number of customer accounts	0 -200	200
Descriptor length	0-29	29
Periodic 2	1/0	1
WEEE Contribution	1/0	0

SET 150 - DISPLAY TILL TOTAL AMOUNT

The cash register date is updated automatically at midnight of every day. If obligatory report execution is programmed, after the date is changed new sales tickets cannot be issued until the report is run.

Operating procedure

1.
2. To disable obligatory report execution after the date change. *
- To enable obligatory report execution after the date change.

* Factory setting

SET 151 – SET MACHINE DATE AND TIME

To set the date and time, proceed as follows:

1. Select **[F] > GENERAL FUNCTIONS** environment, by pressing **[Config] > [Set setup]** keys.

The following screen appears:

F 03.03.2014 18.10 Till No.: 1 <<-->> ◀
Vch: ON Operator: Disabled Pr.list: 1

Prog. list	PLU src	EAN UPC	Item C39		Data Matrix
---------------	------------	------------	-------------	--	----------------

SETTINGS SET UP

0

2. Using the numeric keypad, enter the code **1 5 1** followed by **[X]**
3. The default format for displaying the date is *DD/MM/YY* and corresponds to selection 0.
Select 1 to display the date in the format *MM/DD/YY*
Select 2 to display the date in the format *YY/MM/DD*.
4. press **[X]** to confirm.
5. The default format for displaying the time is *24H*, and corresponds to selection 1.
Select 0 to display the time in *12H* format.
6. Press **[X]** to confirm.
7. Enter the date and press **[X]** to confirm the date entered.
8. The time stored in the cash register is displayed.
9. Enter the time in the format: hh-mm-sec.
10. Press **[X]** to confirm the time entered.

Note:

-
- Changing the date/time is not permitted unless the Z10 report has been run.
-

Example:

1 5 1 followed by **[X]**
DD/MM/YY followed by **[X]**
24H followed by **[X]**
01-01-2012 followed by **[X]**
01:19:43 followed by **[X]**

SET 152 – CHANGE AUTOMAT. DATE & TIME

With SET 152 you can program the register to update the time automatically (Daylight Saving Time to Standard time, and vice versa).

Operating procedure

1.
2. To set manual updating (factory default).
 To set automatic updating

SET 154 – RESET REGISTER GT

Reset the register's Grand Total.

Operating procedure

1.
2. CONFIRM?

SET 155 - ACTIVATE OBLIGATORY INVOICE HEADING FOR INVOICE

You can specify if the details of the invoicee must be completed immediately, at the moment the invoice is issued, or whether these details can be added at a later time.

Operating procedure

1.
2. The details of the customer who is the invoicee can be completed at a later time. (Enable)
 The details of the customer who is the invoicee must be entered at the cash register keypad before issuing the invoice. (Disabled)

SET 157 – ENABLING RESCUE REPORTS

Enable the rescue reports.

Operating procedure

1.
2. To disable the reports
 To enable the reports (factory default).

SET 160 - LANGUAGE SELECTION

To select the language for the interface, proceed as follows:

1. Select [F] > **GENERAL FUNCTIONS** environment, by pressing [Config] > [Set setup].

The following screen appears:

F 03.03.2014 18.10 Till No.: 1 <--->
Vch: ON Operator: Disabled Pr.list: 1

Prog. list PLU src EAN UPC Item C39 Data Matrix

SETTINGS SET UP

0

2. Using the numeric keypad, enter the code **1 6 0** followed by **X**.

WARNING: if you need to change the language after having already used the cash register, it may be necessary to print the reports (Z10). If this is the case, consult the manual for how to print a report.

3. The cash register asks you to confirm that you want to change the language.
4. Press **X** to confirm.
5. The current language (for example, 0=english) appears on the screen.
6. Select the language you want to set from :
0=English
1=Italian
2=French
3=German
4=Spanish .
7. After you have selected the language, the cash register prints an information ticket and automatically restarts.
After restarting, the cash register displays the interface in the new language selected, loading the default parameters and zeroing the management data.

SET 162 – ROUNDING TYPE SELECTION

This is used to set the type of rounding to apply to the total.

Operating procedure

1. ☒
2. ☒ No rounding *
 ☒ SWISS FRANC
 ☒ DANISH KRONE
 ☒ EURO

* Factory setting

SET 171 – SET TICKET GRAN TOTAL PARAMETRES

Set the ticket gran total parameters.

Operating procedure

1. ☒
2. ☒ To disable the gran total parameters settings
 ☒ To enable the gran total parameters settings (factory default).
3. ☒ Set the gran total value.

SET 200 - PRINT SERIES 200 OPTIONS LIST

This function allows you to print the settings for the icons and promotional messages.

Operating procedure

1. ☒
2. Starts printing.

SET 201 - SET UP MERCHANDISE ICONS

A graphical image (or icon) can also be printed on a ticket, together with a predefined promotional message. Icons are sub-divided as follows:

- merchandise categories
- public holidays and special occasions
- lucky tickets with programmed amount

The message can be substituted with one of those provided on the cash register, or by entering a 4-row customised message, each 15 characters in length. For each row, you can choose one of the three printing attributes: normal, double-height, double-width.

Code **SET 201** is used to program the icon to print on tickets and the associated promotional phrase.

Operating procedure

1.
2. / To enable / disable the function
3. To set the number of the icon to print (1 to 120).
4. To associate a custom phrase with the icon selected.
 To select the phrase to associate with the icon (default phrase)
 To select one of the phrases provided by the cash register
5. If "custom phrase" mode is chosen, enter the characters for the descriptor to assign to the current row.
 Confirm to continue to program the attribute for the character.
6. To select the attribute normal
 To select the attribute double-height
 To select the attribute double-width

Repeat the procedure for all (4) rows to be programmed.

7. If "icon-associated phrase" mode is chosen (factory-set phrase):
confirm. The cash register returns to the beginning of SET mode.

otherwise If "select cash register phrase" mode is chosen :
enter the number of the phrase:

Confirm ; the cash register returns to the beginning of SET mode.

SET 203 - SET UP POINT ICONS

At the bottom of the sales ticket, the icon related to reward points can be printed automatically. The number of points is calculated on the basis of a threshold value programmed with option 203.

Operating procedure

1. ☐
2. ☐ / ☐ To enable / disable the function
3. [ICON No. 118] ☐
4. [NUMERIC CHARACTERS] ☐ To set the reference value for calculating reward points.

SET 206 - SET UP PUBLIC HOLIDAY ICONS

The icons in this group, relating to religious holidays or special occasions occurring annually, can be activated during pre-defined periods using the programming code **SET 206**.

The icon **replaces the merchandise icon (if set) during the pre-defined period exclusively.**

NO.	HOL./OCCASION	ICON NO.	PROMOTIONAL PHRASE	PERIOD
1	Christmas	108	HAPPY CHRISTMAS	from 15/12 to 27/12
2	New Year	109	HAPPY NEW YEAR	from 28/12 to 02/01
3	St. Valentine's Day	110	A DAY TO REMEMBER	from 10/02 to 14/02
4	Carnival (*)	111	HAVE A HAPPY CARNIVAL	from 25/02 to 1/03
5	Women's Day (*)	112	A DAY WORTH REMEMBERING	from 05/03 to 08/03
6	Father's Day	113	FATHER'S DAY - BEST WISHES	from 15/03 to 19/03
7	Easter (*)	114	HAPPY EASTER	from 10/04 to 16/04
8	Mother's Day	115	MOTHER'S DAY - BEST WISHES	from 06/05 to 14/05
9	Good Holiday (*)	116	HAVE A GOOD HOLIDAY	from 10/07 to 30/07

(*) the periods shown are purely examples

Operating procedure

1.
 2. **[NUMERIC CHARACTERS]** Set the number of the HOLIDAY/OCCASION (1 – 9) you want to program.
 3. / To enable / disable the function
 4. **[NUMERIC CHARACTERS]** The number of the default icon associated with the selected HOLIDAY/OCCASION is displayed on the screen. To replace this icon with another, enter the number of the icon you require (108-116).
 5. To associate a custom phrase with the icon selected
 To select the phrase to associate with the icon (default phrase)
 To select one of the phrases available on the cash register
 6. **[ALPHANUMERIC CHARACTERS]** If the mode "custom phrase" has been selected, enter the characters for the descriptor to assign to the current row.
 Confirm to continue to program the attribute for the character.
 7. To set the attribute normal
 To set the attribute double-height
 To set the attribute double-width
- Repeat this procedure for all (4) rows to be programmed. After programming the last row, you can proceed to program the period.
8. If the mode "icon-associated phrase" is selected (default phrase):
 confirm to proceed to program the period.
or
[NUMERIC CHARACTERS] If the mode "select cash register phrase" is selected :
 Enter the number of the phrase.
 Confirm to proceed to program the period.
The start period date is displayed on the screen
 9. **[NUMERIC CHARACTERS]** Set the new date, overwriting the previous one.
Confirm the default start period date or the one programmed.
 The end period date is displayed on the screen
 10. Press to confirm the default end period date; otherwise repeat the programming procedure described above.

SET 297 - PRINT LIST OF ICON-PHRASE COMBINATIONS
SET 298 - PRINT LIST OF MERCHANDISE PHRASES
SET 299 - PRINT LIST OF MERCHANDISE ICONS

Operating procedure

- ❖ Cash register in SET operation mode.

PRINT ALL THE MERCHANDISE CATEGORY ICONS (DSGNS & PHRASES)
(FACTORY DEFAULTS)

Confirm printing *

PRINT MERCHANDISE, HOLIDAYS and OCCASION PHRASES

Confirm printing *

PRINT MERCHANDISE, HOLIDAYS and OCCASION ICONS (DSGNS & PHRASES)

Confirm printing *

*Printing can be interrupted by pressing the key or the change mode key

SET 300 - PRINT SERIES 300 OPTION LIST

This function allows you to print how all the functionalities associated with the Series 300 programming codes are programmed.

Operating procedure

1.
2. Start printing

SET 301 - SET MACHINE CODE

Operating procedure

1.
2. Customisation of TILL CODE *.
(Up to 10 alphanumerical characters)

* Factory setting: "01"

SET 302 - SET UP HEADING LINES

For the ticket header 7 rows are provided, printed centred on the ticket. The header can contain the precise company details, including the address and VAT number/Tax Code.

The VAT Number can be programmed exclusively during the EJ initialisation procedure (see CHAP.8 "The E.J.") after running the Z10 daily closure report.

Operating procedure

PROGRAMMING ROWS FROM 1 TO 7

3.

3

0

2

X
4.

[*NUMERIC CHARACTERS*]

X

 To select the logo to be inserted in the first row of the header. ***
5.

0

X

 To position the logo on the left *
- 1

X
- To position the logo at the centre.

2

X

6.

[*ALPHANUMERIC CHARS*]

X

 Customise descriptor. Customisation is only possible if "0" has been chosen as the logo number. **7.

0

X

 To define the character attribute "NORMAL". *

1

X

8.

0

X

 To define a character font with 24 chars / row *

1

X

* Factory setting	** Factory setting: "blank line"	*** Factory setting: "0"
-------------------	----------------------------------	--------------------------

To program the descriptor length, use code 322 (SELECT MACHINE FONT).

When you complete programming the sixth row, the cash register returns to the beginning of configuration mode.

SET 303 - SET UP COURTESY PHRASES

Operating procedure

❖ Programming code 320 set to **2** (enable courtesy message that is then customised using code 303).

1. **3 0 3 X**
2. **[NUMERIC CHARACTERS]** **X** To select the logo you want to insert in the first row of the courtesy message.
3. **0 X** To position the logo on the left
- 1 X** To position the logo at the centre.
- 2 X** To position the logo on the right.
4. **[ALPHANUMERIC CHARS]** **X** Customise the descriptor. Customisation is possible only if "0" has been chosen as the number of the logo.
5. **0 X** To set the character attribute "NORMAL". *
- 1 X** To set the character attribute "DOUBLE-HEIGHT".
6. **0 X** To set the font character with 24 chars / row *
- 1 X** To set the font character with 29 chars / row
7. **Program the other rows**
-

* Factory setting

SET 304 - SET PAYMENT MODE PARAMETERS

This function is used to program forms of payment.
Payment forms are programmed according to the categories listed in the table. The various categories and their respective parameters are defined by entering the alphanumerical characters required and then confirming with the key **[X]**.

FUNCTION (PAYMENT FORM)	
CASH 1 (CASH)	
	DESCRIPTOR
CASH FROM 2 TO 6 (CURRENCIES)	
	DESCRIPTOR
	CHEQUES
	DECIMALS
	ROUNDING
CHECKS 1 (CHECKS)	
	DESCRIPTOR
CREDIT 1 (CREDIT)	
	DESCRIPTOR
CREDIT 2 (CUSTOMER ACCOUNT)	
	DESCRIPTOR
CREDIT 3 (CHIPCARD)	
	DESCRIPTOR
CREDIT CARDS FROM 1 TO 5 (CREDIT CARDS = CASHPNT)	
	DESCRIPTOR
LUNCHEON VOUCHER	

PROGRAMMING LUNCHEON VOUCHERS

This function is used to program luncheon vouchers for up to 15 companies, a maximum of 15 different values or denominations being available for each company.

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTINGS
Company description Denomination description Denomination value	Up to 24 alphanumerical chars. Up to 24 alphanumerical chars. Up to 6 numeric chars.	(PYMT.N.)LUNCH_11 Denom. 0,00

1.	[ALPHANUMERIC CHARACTERS]	to enter the company description (max. 24 chars)
	[X]	to confirm the description and continue to program the voucher denominations
2.	[ALPHANUMERIC CHARACTERS]	to enter the denomination description (max. 24 chars)
	[X]	to confirm and continue to program the denomination value
3.	Subtotal	to select the next COMPANY
5.	Total	to return to the beginning of configuration mode.

This code is used to define a descriptor for each of the currencies in use, its related exchange rate, a rounding value and the number of decimals.

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTINGS
CURRENCY (1–5) EXCHANGE RATE DECIMALS ROUNDING	Up to 29 alphanumeric characters Up to 6 numerics (4+2 dec.) Up to 1 numeric (from 0 to 9) 0 = rounding to 0 1 = rounding to 4 2 = rounding to 5 3 = rounding to 9	CURRENCY 1 (1-5) 0,00 2 5

SET 305 - SET GROUP DESCRIPTORS

This code is used to program the groups by which items of different origins but of the same general type can be categorised. The number of the groups available is 30 (unless set to a different number using option 102), for each of which a description can be programmed, a maximum of 29 alphanumerical characters in length.

Operating procedure

1.

3	0	5	X
---	---	---	---
2.

X

 To position on the first group to program.
3. **[ALPHANUMERIC CHARS]**

X

 To customise the descriptor for the merchandise category.

4. **Proceed as described for steps 2 and 3 for the other merchandise categories.**

SET 306 - ENABLE OBLIGATORY EXECUTION OF DAILY REPORT

The cash register date is updated automatically at midnight of each day. If execution of the daily report is programmed as obligatory, it is not possible to issue a new sales ticket after the date change until this report is run.

Operating procedure

1.

3	0	6	X
---	---	---	---
2.

0	X
---	---

 To disable obligatory execution of the report on date change. *
- | | |
|---|---|
| 1 | X |
|---|---|

 To enable obligatory execution of the report on date change.

* Factory setting

SET 307 - SET UP DISCOUNT TABLE

This function allows you to program up to 6 percentage value discounts and 9 absolute value discounts.

PROGRAMMABLE PARAMETERS

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTING
Percentage value discount		
DESCRIPTION	Up to 15 alphanumeric characters	DISCNT PERC._1
Percentage discount	Up to 4 figures (2+2 dec.)	0,00
Absolute value discount		
DESCRIPTION	Up to 15 alphanumeric characters	DISCNT VALUE_1
Discount value (as absolute value)	Max. 8 figures for discount as an absolute value (6+2 dec.)	0,00

The maximum number (=9) of discounts and the maximum length of the description depend on the value set with option 102.

Operating procedure

Programming percent discounts

1.
2. Customise descriptor
or
 confirm descriptor and continue to program the discount
3. Set the percent discount
4. continue to the next percent discount

Programming absolute value discounts

5. Customise descriptor
or
 confirm descriptor and continue to program the discount
6. Set absolute value for discount (max. 8 characters, 6+2 dec.)
7. continue to the next absolute value discount

- To delete the percentage value programmed, enter

SET 308 - SET VAT RATES

PROGRAMMABLE PARAMETERS

A number of parameters can be programmed for each VAT rate, as indicated in the following table:

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTING
Rate description Rate value (as percentage)	Max. 29 characters, alphanumeric 4 figures max. (from 0,01 to 99,98)	VAT_1 NO TAX

As a prerequisite to programming, you must have run a Z10 Report, a Z20 Tax Extraction Report, and any other reports that are requested before starting to program.
In the [Reports] environment, the key [Mandatory reports for Vat Variation] can be used to execute automatically all the reports required.

Operating Procedure

- 3

0

8

X

 On the lower row of the operator display, a descriptor is proposed for the first VAT rate.
 - [MANAGEMENT TYPE]

X

 0 followed by

X

 for SPIN.OFF TAX
1 followed by

X

 for ADD ON
 - [ALPHANUMERIC CHARACTERS]

X

 Customise the descriptor.
 - [NUMERIC CHARACTERS]

X

 Set the VAT rate as a percentage.
 - Repeat steps 3 and 4 for any other VAT rates you want to add (up to a maximum of 7).
-
- if the tax extraction reports have not been run, the message appears "RUN REPORTS".
 - To cancel the percentage programmed, enter

0

SET 309 - SET PERCENT MARKUP PARAMETERS

This function is used to program up to 9 percentage value markups and 9 absolute value markups (set to 6 by default).

PROGRAMMABLE PARAMETERS

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTING
Percentage value markups		
DESCRIPTION	Up to 10 alphanumeric characters	MRKUP PERC._1
Percentage discount	Up to 4 numerics (2+2 dec.)	0,00
Absolute value markups		
DESCRIPTION	Up to 15 alphanumeric characters	MRKUP VALUE_2
Value discount (absolute value)	Up to 8 numerics for the absolute value for the markup (6+2 dec.)	0,00

The maximum number of markups (max 9) and the maximum length of the description depend on the value set with option 102.

Operating procedure

Programming percentage discounts

1.

3

0

9

X
2.

[ALPHANUMERIC CHARS]

X

 Customise descriptor
or

X

 confirm descriptor and continue to program markups.
3.

[NUMERIC CHARACTERS]

X

 Set percentage for markup
4.

X

 continue to next percentage markup

Programming absolute value discounts

5.

[ALPHANUMERIC CHARS]

X

 Customise descriptor
or

X

 confirm descriptor and continue to program markup
6.

[NUMERIC CHARACTERS]

X

 Set absolute value for markup (max. 8 characters, 6+2 dec.)
7.

X

 continue to next absolute value markup

- If you want to delete the percentage programmed, enter

0

SET 310 - SET MONEY ORDER DESCRIPTOR

This function is used to program a descriptor to associate with the RETURN function.

Operating procedure

1.
2. Customise descriptor. *
 (Up to 29 alphanumerical characters)

* Factory setting: "M.ORDER"

SET 311 - SET HALO VALUE FOR CHANGE

You can define a maximum amount that can be returned to the customer as change for payment of a sale. If during operation mode the amount that must be returned exceeds this limit, an error is signalled.

The maximum amount that can be set for change is between 0 and 999999 inclusive (6 figures + 2 decimals).

Operating procedure

1.
2. Set the maximum amount

SET 314 - PRINT MACHINE CONFIGURATION

This function allows you to print the current configuration of the cash register at any time. This operation is useful to obtain a paper copy of how the cash register has been configured for the option SET 102, and relates mainly to these entities:

- WEEE CONTRIB.
- NO. OF DEPTS
- NO. PRICE LISTS
- DESCRIPTOR
- ENABLE GROUP LINK
- MAX. PRICE (HALO)
- MIN. PRICE (LALO)
- OFFER LINK
- REG PERIODIC 2
- NO. PLUS
- NO. OF KEYS
- NO. PAYMNT FORMS
- NO. OPERATORS
- NO. OFFERS N X M
- NO. DISCOUNTS (VALUE AND PERCENT)
- NO. OF MARKUPS (VALUE AND PERCENT))
- NO. OF MARKUP VALUE
- DESCRIPTOR
- PERIODIC 2 REG
- NO. GROUPS
- NO. VAT RATES
- NO. CUSTOMER ACCOUNTS
- PLU (BARCODES)

All the data set can be modified using option 102 or 801 PLU (Barcodes).

For each entity the maximum length allowed for the descriptor is specified.

Operating procedure

1.
2. ☒ Start printing

SET 315 – X MODE AUTOMATIC REPORT MANAGEMENT

SET 316 - Z MODE AUTOMATIC REPORT MANAGEMENT

This function is used to program automatic printing of a number of reports. This means that with a single operation you can print all the reports programmed at the same time.

- **SET 315:** allows you to program sequential printing in X mode of a maximum of 22 reports (daily + periodic).
- **SET 316:** allows you to program sequential printing in Z mode of a maximum of 21 reports (daily only).

The configuration of this function depends on how SET 328 is set. If DISABLED () the function is set for daily/periodic, if it is ENABLED () the function is set for periodic 1/periodic 2.

The following table indicates the reports that can be printed automatically and their execution code:

REPORT <i>SET 328 = 0</i>	Reports screen key	Execution codes in X MODE (SET315)		Execution codes in Z MODE (SET316)	
		<i>Daily</i>	<i>Periodic</i>	<i>Daily</i>	<i>Periodic</i>
<i>SET 328 = 1</i>		Periodic1	Periodic2	Periodic1	Periodic2
Departments	Depts.	1	11	1	11
Management	Management	4	14	4	14
Till operations	Till operations	5	15	5	15
Hourly sales	Sales per hour	6		6	
Tax report	Tax extraction		20		20
Currencies	Currencies	7	17	7	17
Report Z10	Report (Z10)	10	10	10	10
Barcode reader- accessed PLUs	BCR PLUs	9	19	9	19
Invoices	Slip printer Documents	18	28	18	28
Operators	Operators	21	31	21	31
Luncheon voucher	Lunch vcr	25	35	25	35
Customer account	Cust. accounts	26	36	26	36
Customer account movements	Cust. Accs w movements	29	39		

Operating procedure

1. /
2. To disable printing of the report indicated on the operator display
 To enable printing of the report indicated on the operator display
3. **Proceed with the remaining reports**

You can program the cash register so it must obligatorily calculate the change due to the customer on registering payment for a sales transaction. In this case, the operator must enter the amount received from the customer before finalising the ticket.

1.

3

1

8

X

2. ☐ To disable the function for obligatory calculation of the change due *
- ☒ To enable the function for obligatory calculation of the change due

* Factory setting

Operating procedure

1. To enable the courtesy message programmed in the factory.
(THANK YOU AND SEE YOU SOON) *
2. To disable the courtesy message.
3. Enable the message customised by the user using code 303

* Factory setting

SET 321 - ENABLE ZERO PRICE

To register a transaction involving a free gift it must be possible to register a zero price on the ticket for the item. This function allows you to enable or disable the possibility of registering zero prices for items.

Operating procedure

1.
2. To disable the sales function for zero price items. *
- To enable the sales function for zero price items.

* Factory setting

SET 322 - SELECT MACHINE FONT

With this code you can select the character font to be used when printing tickets.

Operating procedure

1.
2. Selects font type 1 to print up to 24 characters per row *
- Selects font type 2 to print up to 29 characters per row

* Factory setting:

SET 324 - SELECT VAT DETAILS

This can be used to select the type of details to be printed for tax extraction at the bottom of the ticket.

Operating procedure

1. ☒ 3 ☒ 2 ☒ 4 ☒ X
2. ☐ 0 ☒ X NO VAT CALC.
☒ 1 ☒ X PRINT VAT INFO
☒ 2 ☒ X ON TOTAL AMOUNT *
☒ 3 ☒ X DETAILS SALE

* Factory settings

0 (No VAT CALC)

YOUR RECEIPT
THANK YOU

REGTR:	01
30-10-2012	16:40
TK.NO.	4
DEPT.-1	10,00
DEPT.-2	20,00
DEPT.-3	30,00
TOTAL	60,00
CASH	60,00

HAVE A NICE DAY
PLEASE COME AGAIN

2 (ON TOTAL AMOUNT) Default setting

YOUR RECEIPT
THANK YOU

REGTR:	01
30-10-2012	16:44
TK.NO.	1
DEPT.-1	10,00 A
DEPT.-2	20,00 B
DEPT.-3	30,00 C
TOTAL	60,00
CASH	60,00

	% VAT	TAXB.AMT	TAX.AMT
A 10,00		9,09	0,91
B 20,00		16,67	3,33
C 30,00		23,08	6,92
		48,84	11,16

HAVE A NICE DAY
PLEASE COME AGAIN

1 (PRINT VAT INFO)

YOUR RECEIPT
THANK YOU

REGTR:	01
30-10-2012	16:41
TK.NO.	5
DEPT.-1	10,00
DEPT.-2	20,00
DEPT.-3	30,00
TOTAL	60,00
CASH	60,00

VAT ASSOLVED

HAVE A NICE DAY
PLEASE COME AGAIN

3 (DETAILS SLE)

YOUR RECEIPT
THANK YOU

REGTR:	01
30-10-2012	16:44
TK.NO.	2
DEPT.-1	10,00 A
DEPT.-2	20,00 B
DEPT.-3	30,00 C
TOTAL	60,00
CASH	60,00

	A *TXB.AMT	10,00%	:
		9,09	
	*VAT 10,00%	0,91	
B	*TXB.AMT 20,00%	:	
		16,67	
	*VAT 20,00%	3,33	
C	*TXB.AMT 30,00%	:	
		23,08	
	*VAT 30,00%	6,92	

HAVE A NICE DAY
PLEASE COME AGAIN

SET 329 - ENABLE SINGLE ITEM SALES

This function allow you to print the "quantity 1" (1x 10,00 Rep1).

Operating procedure

1.
2. To disable the print of "quantity 1" *
3. To enable the print of "quantity 1"

* Factory setting

SET 332 – GENERATION QR CODE

The cash register is able to recognise and print 2-D barcodes of QR Code type.

It is possible to codify links to Internet sites, publicity messages etc using this type of 2-D graphics. After the QR code is generated and printed, it can be retrieved by special applications resident, for example, in a smartphone.

The description for translation into QR Code is programmed using SET 332.
The QR Code generated in this way can be inserted as a logo at the bottom of a ticket.

Note: To program the logo use the code SET 303.
To print the logos saved in the cash register use the code SET 296.

Operating Procedure

1.
2. **[FORMATS ?]** 0 = Disabled to continue
1 = Format the logo present in the machine
3. In the field, enter the description you want to codify as a QR Code, confirming at the end with

SET 338 - SET HEADER LINES FOR INVOICE

INCREASING HEADER ROWS FOR TICKETS/INVOICES

On the cash register 8 additional rows can be programmed using code 338. These 8 rows are in addition to the ticket header rows that can be programmed using code 302.

Note: Code 338 provides 8 additional rows that are “free”, that is, not restricted to entry of any particular type of field.

Operating procedure

PROGRAMMING ROWS FROM 1 TO 8

1.
2. [ALPHANUMERIC CHARS] Enter characters for the type of attribute
3. [ALPHANUMERIC CHARS] Continue with the other rows you want to program

Note: programming the other rows is the same as for programming for the ticket header (code 302).

SET 339 - SET SIMPLIFIED INVOICE PARAMETERS

Sets the Invoice series for the specific cash register, and the initial number to use for numbering the invoices.

Operating procedure

1.
2. [ALPHANUMERIC CHARS] Set invoice series, maximum 3 alphanumeric characters (default=A)
3. [NUMERIC CHARS] Program the invoice number, maximum 5 numeric characters (default=1)

SET 340 - SET WEEE GENERIC MESSAGE DESCRIPTORS

Using code 340 you can program a customisation message relative to the WEEE eco-contribution, composed of 3 rows (of 24/29 characters). Only the descriptor is set, not the attribute.

This is printed at the end of the ticket if WEEE with specific amount mode is enabled for the ticket.

Operating procedure

1.

3	4	0	X
---	---	---	---

 To customise the descriptive message for the eco-contribution
2.

[ALPHANUMERIC CHARS]	X
----------------------	---

 Customise the first row of the message.
3. Program the remaining rows

SET 341 - SET WEEE MESSAGE VALUE DESCRIPTORS

Using code 341 you can program a customisation message related to the WEEE eco-contribution composed of 3 rows each of a maximum of 29 characters (24/29 characters). Only the descriptor is set, not the attribute.

The descriptor is printed at the bottom of the ticket if WEEE with generic amount mode is enabled for the ticket.

Operating procedure

1.

3	4	1	X
---	---	---	---

 Customise the descriptive message for the eco-contribution
2.

[ALPHANUMERIC CHARACTERS]	X
---------------------------	---

 Customise the first row of the message.
3. Program the remaining rows

SET 342 - SET PROFORMA RECEIPT MESSAGE

Set the proforma message consisting of a maximum of 2 rows.

Operating Procedure

- 1.
 342-LINE 1 Enter a description for line 1
- 2. **Text Attributes**
 NORM. ATTRIB. (normal text)
 D.HGT. ATTRIB. (double-height text)
- 3. **Characters/Row**
 24 chars/row
 29 chars/row
 342-LINE 2 Same settings as for line 1

SET 345 – SAVE DATABASE DATA AND DEF. SETTINGS

Code **345** can be used to save the following types of data on the pen: all cash register programming data (configuration set-up), the database descriptive part, accounting data used by the cash register for generating Management reports.

Operating Procedure

1. Insert the USB pen into the cash register.
Note: If you try to save the data without first inserting the pen, an error is displayed: "STICK NOT INSERTED".
2. Select configuration (**CONFIG**) mode for the register.
3.

3	4	5	X
---	---	---	---

 On the display the message appears: "345-WRITING DATA/WAIT" and writing the data starts.
 - a. If the data is written successfully, the message is displayed: "WRITING EXECUTED/REMOVE STICK"
 - b. If during writing errors are encountered, a warning is displayed: "ERROR WRITING/REMOVE STICK".**Note:** Try repeating the procedure, making sure that the pen is inserted correctly. If the error re-occurs, contact Technical Services.
4. Remove the pen. The machine automatically enters SET (configuration) mode when the pen is removed.

Checking the data saved

Insert the USB pen into a USB port on the computer to check the data saved, and that the following files are present in the "presetting_files" folder:

- Datapresetfile.csv: saves the current date
- DBxxxxxDesc.csv: DB descriptive part
- DBxxxxxField.csv: DB periodic 1 and periodic 2
- DBxxxxxStruct.txt: DB formatting string in binary format
- DescriptorsPresetFile: Descriptor-type variables (presetting)
- FlagsPresetFile: Flag-type variables (presetting)
- KbdFile: Keypad programming
- NumbersPresetFile: Number-type variables (presetting)
- PermissionLevelFile: Permission levels associated with keypad functions
- RegistersPresetFile: Register-type variables (presetting)
- presetting: the presence of this empty file (size 0) confirms that the files have been saved)
- ASNTfile: these are two files named asntdescriptorspresetfile.csv and asntnumberspresetfile.csv
- LOGOfile: infodescxxxx.txt and logfile.txt.

xxxxx represents the name of each database. For each type of database, three files are present in the folder.

The files present on the pen, organised as described above (DBxxxxxDesc.csv, DBxxxxxField.csv, DBxxxxxStruct.txt) have the following structure:

File name	Description
Department	Department database
DiscountMarkUp	Discount and markup tables
Group	Merchandise groups
Hourly	Hourly sales
InternalClientAccount	Customer accounts
InternalPlu	PLUs accessed by number (1-250)
Operator	Operators
OperatorPayment	Payment types related to the operators
Payment	Payment types
Plu	PLUs accessible using barcode reader
Promotions	Sales offers
Vat (Invoice, Ticket with information of type Desc and Field, and a unique file for the Struct type.)	VAT table (VAT for invoices, VAT for tickets).

Note: if the files present on the pen do not correspond with those described in the table, or if the space they occupy is 0 bytes, try repeating the procedure on another USB pen making sure first that it is functional and inserted correctly.

SET 346 – RESTORE DATABASE DATA AND DEF. SETTINGS

The SET 346 option restores the following types of information to the cash register:

- descriptive part (all data saved by the user excluding accounting data) of all the databases present on the cash register
- all the cash register preset parameters, excluding logos.

Operating Procedure

1. Insert the USB pen into the cash register.
Note: If you try restoring the data without first inserting the pen, an error is displayed: "STICK NOT INSERTED".
Note: Before proceeding you may have to print the management reports indicated by the cash register. You will not be allowed to proceed with the restore operation until you do so.
2. Select SET mode for the register.
3. On the display the message appears:
"DESTRUCTIVE OPER. PROCEED?"
Press the key to continue.
You are asked if you want to format or not:
"FORMAT? ENABLED: 1, DISABLED: 0."
If you choose 1 the data in the cash register is deleted, if you choose 0 the data is maintained.
At the end, a message is shown on the screen:
"346-READING DATA/WAIT" and reading of the data starts.
 - a. If the data on the pen is read successfully, the message is displayed: "READ EXECUTED/REMOVE STICK"
 - b. If, however, errors have occurred during reading, the warning appears "READ ERROR/REMOVE STICK".**Note:** Try repeating the procedure, making sure that the pen is inserted correctly. If the error re-occurs, contact Technical Services.
4. The procedure has completed. The register prints a ticket (ECR CONFIGURATION) that shows the current configuration of the cash register. The ticket is saved in the EJ.
5. Remove the pen. When the USB pen is removed, the machine automatically enters SET mode.

SET 347 - RESET BCR PLU DATA

Code 347 restores the cash register with the data relative to the PLUs accessed via the barcode reader and set up by the user. The data is read from a USB pen (the data restored is that saved using code 345).

Note: when the data of PLUs accessible via barcode reader is restored, the previous PLU data on the cash register is lost without possibility of retrieval.

Operating procedure

1. Insert the USB key into the cash register.
Note: if you try to restore the data without having inserted the pen, an error is displayed "STICK NOT INSERTED".
Note: before proceeding it may be necessary to print the Management reports indicated by the cash register. If the reports are not executed it will not be possible to proceed with the restore.
2. Set the register to configuration mode.
3.  On the screen, the message appears:
"347-READING DATA/WAIT" and reading of the data starts.
During this phase, the following conditions could occur:
 - c. If reading of the data on the pen completes successfully, the message is displayed:
"READING EXECUTED/REMOVE STICK".
 - d. If, during reading, errors are encountered, the following error is displayed:
"READ ERROR/REMOVE STICK".**Note:** Try repeating the procedure, making sure that the pen is inserted correctly. If the error re-occurs, contact Technical Services.
4. When the procedure terminates, the register prints a ticket with the header "347- DATA READING".
The ticket is saved in the EJ.
5. Remove the pen.
When the USB pen is removed, the register positions automatically at the beginning of configuration mode, displaying the message "SET/0".

SET 348 - SAVING THE USER CONFIGURATION (DATABASE) OF THE CASH REGISTER

Code 348 saves the user configuration (DATABASE) of the cash register.

Operating Procedure

1. Insert the USB pen into the cash register.
Note: If you try to save the data without first inserting the pen, an error is displayed: "STICK NOT INSERTED".
2. Select SET (**CONFIG**) mode for the register.
3. 3 4 8 X On the display the message appears: "348-WRITING DATA/WAIT" and writing of the data starts.
 - a. If the data is written to the pen successfully, a message is displayed "WRITING EXECUTED/REMOVE STICK"
 - b. If, however, errors are encountered during writing, an error is displayed: "WRITE ERROR/REMOVE STICK".**Note:** Try repeating the procedure, making sure that the pen is inserted correctly. If the error re-occurs, contact Technical Services.
Remove the pen.
On removal of the USB pen, the machine automatically enters SET mode.

SET 349 - RESTORING THE USER CONFIGURATION (DATABASE) OF THE CASH REGISTER

Option SET 349 restores the user configuration (DATABASE) of the cash register.

Preliminary Operations

Data archival on the USB pen performed using the option SET 348 saves the data in a file "**<cashregisterid>-database.tar**" archived in the folder [**crf7100\database**].

To be able to restore the data again using the SET 349 command, you must rename the file from "**<cashregisterid>-database.tar**" to **database.tar** using a PC.

Operating Procedure

1. Insert the USB pen into the cash register.
Note: If you try to restore the data without first inserting the pen, an error is displayed: "STICK NOT INSERTED".
Note: Before proceeding, it may be necessary to print the Management reports indicated by the cash register (ACTIVE ACCOUNT). You will not be allowed to proceed with the restore operation until you do so.
2. Select SET mode for the register.
3.

3

4

9

X

 On the display the warning appears:
"DESTRUCTIVE OPER. PROCEED?"
Press the


X

 key to continue.
You are asked if you want to format or not:
"FORMAT? ENABLED: 1, DISABLED: 0."
If you choose 1, the data in the cash register is deleted, if you choose 0 the data is maintained.
At the end, a message is shown on the screen:
"346-READING DATA/WAIT" and reading of the data starts.
 - a. If the data on the pen is read successfully, the message is displayed:
"READ EXECUTED/REMOVE STICK"
 - b. If, however, errors have occurred during reading, the warning appears
"READ ERROR/REMOVE STICK".**Note:** Try repeating the procedure, making sure that the pen is inserted correctly. If the error re-occurs, contact Technical Services.
4. The procedure has completed. The register prints a ticket (ECR CONFIGURATION) that shows the current configuration of the cash register. The ticket is saved in the EJ.
5. Remove the pen. When the USB pen is removed, the machine automatically enters SET mode.

SET 350 - MAKING A SECURITY (BACKUP) COPY OF THE CASH REGISTER ON A USB PEN

Code 350 makes a security, backup, copy of the cash register.

Operating Procedure

1. Insert the USB pen into the cash register.
Note: If you try saving the data without first inserting the pen, an error is displayed: "STICK NOT INSERTED".
2. Select configuration mode (**CONFIG**) for the register.
3.  On the display the message appears: "350-WRITING DATA/WAIT" and writing of the data starts.
 - a. If the data is written to the pen successfully, the message is displayed: "WRITING EXECUTED/REMOVE STICK"
 - b. If, however, errors have occurred during writing, the warning appears: "WRITE ERROR/REMOVE STICK".**Note:** Try repeating the procedure, making sure that the pen is inserted correctly. If the error re-occurs, contact Technical Services.
Remove the pen.
When the USB pen is removed, the machine automatically enters SET mode.

SET 351 - RESTORE USER DATA

Code 351 restores a backup copy of the cash register that was previously saved.

Preliminary Operations

Data archival on the USB pen executed with the option SET 350 is saved in a file "**<daymonthyear-cashregisterid>-backup.tar**" archived in the folder [**crf7100\backup**]. To be able to restore it using the SET 351 command, you must rename it from: "**<daymonthyear >-backup.tar**" to **backup.tar** on a PC.

Note: More than one backup copy could be present. Choose the most appropriate one using as a reference the archival date.

Operating Procedure

1. Insert the USB pen into the cash register.
Note: If you try to restore the data without first inserting the pen, an error is displayed: "STICK NOT INSERTED".
Note: Before proceeding, you may be required to print the Management reports indicated by the cash register (ACTIVE ACCOUNT). You will not be allowed to proceed with the restore operation until you do so.
2. Select SET mode for the register.
3. On the display the message appears:
"DESTRUCTIVE OPER. PROCEED?".
Press the key to continue.
On the display you are asked if you want to format or not:
"FORMAT? ENABLED: 1, DISABLED: 0."
If you choose 1 the data in the cash register is deleted, if you choose 0 the data is maintained
At the end, a message is shown on the display:
"346-READING DATA/WAIT" and reading of the data starts.
a. If the data on the pen is read successfully, the message is displayed:
"READ EXECUTED/REMOVE STICK"
b. If, however, errors have occurred during reading, the warning appears
"READ ERROR/REMOVE STICK".
Note: Try repeating the procedure, making sure that the pen is inserted correctly. If the error re-occurs, contact Technical Services
4. The procedure has completed. The register prints a ticket (ECR CONFIGURATION) that shows the current configuration of the cash register. The ticket is saved in the EJ.
5. Remove the pen. When the USB pen is removed, the machine automatically enters SET mode.

SET 352 - SELECT ADD MODE TYPE

The cash register is programmed in the factory so that the decimal point is inserted automatically only when prices consisting of whole numbers are entered (e.g. Euro 12,00). Therefore, when entering a price containing cents (e.g. Euro 12,35), you must enter the decimal point after the whole number (12).

Operating procedure

1.
2. Disables the automatic decimal point function *
- Enables the automatic decimal point function.
- Enables the function for sales amounts only, not for quantities

* Factory setting

SET 355 - ENABLE CUTTER

This function allows you to enable or disable the automatic cutting by the cutter.

Operating procedure

1.
2. To disable automatic cutting
- To enable automatic cutting

SET 356 - ENABLE ACOUSTIC WARNING FOR BARCODE READER

This function allows you to enable or disable the acoustic signal that, during use of the barcode reader, indicates when the item's barcode has been read.

Operating procedure

1.
2. To disable management of the acoustic signal.
 To enable management of the acoustic signal. *

* Factory setting

SET 358 - ENABLE REPORT SAVING ON EJ

This function allows you to enable or disable registration of Management reports in "X" - "Z" mode on EJ.

Operating procedure

1.
2. To disable registration of management tickets in "X" - "Z" mode on EJ. *
 To enable registration of management tickets in "X" - "Z" mode on EJ.

* Factory setting

SET 359 - ENABLE BCR PRINTING

This function allows you to enable or disable printing on the sales ticket of the barcode read by the barcode reader, in addition to the description of the item sold.

Operating procedure

1.
2. To disable printing of the barcode. *
 To enable printing of the barcode.

* Factory setting

SET 360 - ENABLE PASSWORD MANAGEMENT

The cash register is supplied with access code management disabled and with the following values for the predefined codes :

VALUE	DESCRIPTION
111111	Supervisor code
222222	Cashier code

Operating procedure

1.
2. To disable access code management. *
- To enable access code management

* Factory setting:

SET 361 - SET SUPERVISOR PASSWORD

PROGRAMMABLE PARAMETERS

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTING
CODE	Up to 6 numeric characters	111111

Operating procedure

1.
2. **[NUMERIC CHARACTERS]** Input (Type), predefined code (111111), if already modified, the actual supervisor code.
3. **[NUMERIC CHARACTERS]** Set the new code
4. Confirm the new code
 Cancel the new code

SET 362 - SET CASHIER PASSWORD

PROGRAMMABLE PARAMETERS

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTINGS
CODE	Up to 6 numeric characters	222222

Operating procedure

1.
2. [NUMERIC CHARACTERS] Input the predefined cashier code (222222) or, if already modified, one of the two codes set.
3. [NUMERIC CHARACTERS] Set the new code
4. Confirm the new code
 Cancel the new code

SET 363 - SELECT NO. TICKETS ON EJ TO PRINT

This function allows you to select the number of tickets on the EJ to print.

Operating procedure

3.
4. **NUMBER** Enter the number of tickets on EJ to print. *

* Factory setting is 10

SET 364 - SELECT TYPE AND THRSOLD. VALUE FOR EJ END

This function allows you to program a threshold value for the amount of space still left on the EJ.

When the threshold value is reached it is signalled via a message printed as an appendix to the closure report, and repeated for each closure until the EJ in use is replaced.

Operating procedure

1.
2. To set a threshold expressed in days.
 To set a threshold expressed as a percentage. *
 To set a threshold expressed in MB.
3. [NUMERIC CHARS] Threshold value expressed in days (2 chars max.)
[NUMERIC CHARS] Threshold value expressed as a percentage. ** (3 chars max.)
[NUMERIC CHARS] Threshold value expressed in MB (3 chars max.)

* Factory setting: "1"

** Factory setting: "5"

SET 365 - SAVE ALL TICKETS ON EJ

This function is used to enable or disable registration of management tickets in "REG" mode.

Operating procedure

1.
2. To disable the function for registering management tickets in "REG" mode on the EJ.
 To enable the function for registering management tickets in "REG" mode on the EJ. *

* Factory setting

SET 366 - ENABLE MULTIPLE TICKETS

For multiple tickets, allows you to program whether sales items are grouped according to merchandise categories or departments.

Operating procedure

1.
2. To disable the function
 To enable the function
3. Selects grouping by department
 Selects grouping by merchandise category
 Selects grouping by item
4. Manual, for generating a multiple ticket manually
 Automatic, for generating a multiple ticket automatically

SET 367 - ENABLE PRINTING OF ARTICLES SOLD

Enables printing of the number of transactions or items sold on the sales ticket.

In SET mode, code 367 can be programmed to enable printing on the sales ticket of the number of transactions or items sold.

On entering code 367 for SET, the following is displayed :

- PRICE = 0
- ITEM = 1

Pressing the key after choosing either PRICE or ITEM, you are requested to enable or disable whether it is printed on the ticket:

- DISABLED = 0
- ENABLED = 1

Press the key to end programming.

SET 368 - ENABLE TILL TOTAL DISPLAY

Using this function you can enable/disable printing of the till total on the deposit/withdrawal ticket, and for function SET 150.

Enter the access code of the supervisor, by default 111111, or check the access code setting using option SET361.

Operating procedure

1.
2. To disable displaying/printing of the till total on the deposit/withdrawal ticket and for function SET150.
 To enable displaying/printing of the till total on the deposit/withdrawal ticket and for function SET150

SET 370 - ENABLE OPERATORS

Operating procedure

1.
2. To disable operator management
 To enable cashier
3. To enable waiters
 To enable cashier/waiter
 [ALPHANUM. Enter the access code of the supervisor, by default 111111, or check
CHARACTERS] the access code set using the option SET361.
4. To disable printing of the till total on the operator report
 To enable printing of the till total on the operator report

SET 371 - ENABLE CUSTOMER ACCOUNTS

Operating procedure

1.
2. To disable customer account management
 To enable customer account management
3. To copy the disabled account
 To copy the enabled account

SET 372 - SET OFFER VALUES

This function allows you to program up to 5 offers; for each offer you can program a 4-row descriptor.

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTINGS
Offer description Offer	4 rows, each max. 24 chars Value "N" and value "M"	LINE_1 0

The length of the programmable fields depend on the value set using option 102.

Operating procedure

1.
2. to customise the first row of the descriptor for the first offer and continue to the next row
or
 to confirm the descriptor row and continue to the next row
or
 to select the next offer
3. to set the number "N"
4. to set a number "M" less than "N", but not equal to 0
5. to continue to program the next offer

SET 375 - PRINT TICKET INFORMATION

This function allows you to print the programming of the ticket executed with code 304.

Operating procedure

1. Prints the programming

SET 380 - WAIT FOR DISPLAY SWITCH-OFF

Operating procedure

1.
2. Time value expressed in minutes (from 0 to 255) to set for the time delay before the touch screen is switched off

Operating procedure

- ## SET 390 - PRINT SERIES 390 OPTIONS LIST

Operating procedure

1. **3 9 0 X** Start printing. If the chipcard is not inserted, when it is subsequently inserted, printing starts automatically.

SET 391 - CHIPCARD FORMATTING MANAGEMENT

This procedure can be used to format the chipcard with the dealer information. If the chipcard has already been used, any data present on it must first be deleted.

The programmable parameters are the following:

FUNCTION	PROGRAMMABLE PARAMETERS
Unique Card If the chipcard is not configured as unique, its use is permitted without entering the dealer's secret code set using code 396. However, if the chipcard is configured as unique, it can only be used after entering the dealer's secret code set using code 396. Dealer VAT No.	(0=no 1=yes) Optional parameter

Operating procedure

3.

3	9	1	X
---	---	---	---
4.

0	X
1	X

 Unique card = no
Unique card = yes
3. **[Numeric characters]**

X

 To enter the VAT No. of the dealer
(optional parameter)

SET 392 - CHIPCARD PROGRAMMING INFORMATION

This procedure is used to initialise the chipcard with the information necessary for its use, and for identifying the customer.

This programming can be performed only when the net balance between deposits, withdrawals and payments using the chipcard is = 0.

FUNCTION	PROGRAMMABLE PARAMETERS
Card Identifier - Public circuit or private card - Fidelity card - Electronic wallet card - Credit limit (loan) - Chain store code - Shop code - Expiry date	 (1=circ. 0=private) (0=No 1=Yes) (0=No 1= Yes) (max. 8 digits) (max. 2 alphanumerical chars.) (max. 2 alphanumerical chars.) (dd-mm-yyyy)
Customer Identifier Customer code Name and surname T.C. or VAT No. Address Town and Postcode Date of birth	 (alphanumeric, max. 4 chars.) (alphanumeric, max. 22 chars.) (16 chars for T.C., 11 chars for VAT No.) (alphanumeric, max. 22 chars.) (alphanumeric, max. 22 chars.) (dd-mm-yyyy)
Public circuit card	A card programmed as public circuit can be used without the need to enter a secret code defined using code 395.
Private card	A card programmed as private can only be used together with the card's secret code defined using code 395.
Fidelity card	Card programmed for calculating reward points or stamps.
Electronic wallet card	Card that can be programmed to permit deposit and withdrawal operations. To use the electronic wallet, a specific secret code must be set for it using code 397.
Expiry date	On expiry, the card can no longer be programmed but only read.

Operating procedure

1.
3. / Public Circuit card = 1 / Private card = 0 ⁽¹⁾
4. / Fidelity card = 1 / Fidelity card = 0
5. / Electronic wallet = 1 ⁽²⁾ / Electronic wallet = 0
6. [Numeric characters] To program the maximum credit limit 999 999,99⁽³⁾
7. [Alphanumeric chars] Chain store code - not supported
8. [Alphanumeric chars] Shop code - not supported
9. [dd-mm-yyyy] To enter the expiry date for the card ⁽⁴⁾ (*)
The message "**Reactivate card?**" appears when the card has expired or a new card is inserted
 confirm
 cancel
10. [Alphanumeric chars] Customer code - not supported
11. [Alphanumeric chars] Enter customer Name and Surname (max. 22 chars) (*)
12. [Alphanumeric chars] Enter Tax Code or Vat Number (16 or 11 chars max.) (*)
13. [Alphanumeric chars] Enter customer's address (22 chars max.) (*)
14. [Alphanumeric chars] Enter customer's town and postcode (22 chars max.)
15. [Numeric characters] Enter the customer's date of birth (22 chars max.) (*)

(*) Obligatory parameter

⁽¹⁾ If the card is programmed as private without a secret code having been programmed for it (using code 395), the machine assumes the default value (0000)

⁽²⁾ If you want to control use of the wallet by means of a secret code, remember to program the secret code before enabling the wallet.

⁽³⁾ This parameter is requested only if the electronic wallet is enabled.

⁽⁴⁾ A date preceding the card registration date on the cash register is not allowed.

In the case of "card expired" the card can be read only.

In the case of "card expired", you can reactivate the card by modifying this parameter.

SET 393 - CHIPCARD DELETION

The contents of the chipcard programmed using code 392 can be completely deleted using code 393.

This deletion operation however does not delete the configuration performed by formatting (using code 391), but it makes it possible again.

The Chipcard must be inserted into the cash register.

The net balance between deposits, withdrawals and payments must be = 0

Operating procedure

1.

3	9	3	X
---	---	---	---
2.

0	X
1	X

 Cancel
Starts deletion procedure

- Card extraction -

3.

0	X
1	X

 Return to the beginning of configuration mode.
Restart the delete procedure for another card

SET 394 - CHIPCARD DUPLICATION

Makes a full copy of a chipcard to another chipcard of the data registered using code 392. The chipcard to which to copy data must have been formatted previously using code 391.

Operating procedure

1.

3	9	4	X
---	---	---	---

 Message for insertion of chipcard if the card to be copied is not inserted.

or

3	9	4	X
---	---	---	---

 Message for extraction of the chipcard if the card to be copied is inserted. The contents of the card are read and saved in memory.
Message to insert the card to which you want to copy the data.
2. - **Card insertion** -
The copied data is written to the new chipcard.
Card extraction message. The card has been copied.
3. - **Card extraction** -
4.

0	X
1	X

 Returns to the beginning of configuration mode
Starts the procedure again to copy another card

SET 395 - CHIPCARD CODE MANAGEMENT

You can configure the card with its own secret code. Programming the chipcard as "PRIVATE" using code 392, the cash register recognises only chipcards responding to the secret code PSWCARD.

The PSWCARD is composed of a maximum of 4 alphanumerical chars. and must be entered before programming the card as "PRIVATE".

When programming the password, the chipcard must not be inserted in the cash register.

Operating procedure

1.

3	9	5	X
---	---	---	---
2. [*Alphanumeric chars*]

X

 To enter the secret code

SET 396 - DEALER CHIPCARD CODE MANAGEMENT

If you intend to control use of the card by means of a secret code, you must first enter the secret code **PSWCONC** and then configure the card as **unique card**. PSWCONC is composed of max. 4 alphanumerical chars.

When programming the password, the chipcard must not be inserted in the cash register.

Operating procedure

1.

3	9	6	X
---	---	---	---
2. [*Alphanumeric chars*]

X

 To enter the secret code

SET 397 - WALLET CHIPCARD CODE MANAGEMENT

Use of the card as an electronic wallet can be protected by a secret code, PSWBORS. PSWBORS is composed of max. 4 alphanumerical chars. When programming the secret code, the chipcard must not be inserted in the cash register.

Operating procedure

1.
2. To enter the secret code

SET 398 - CHIPCARD PNTS MANAGEMENT

When the chipcard is ENABLED as a Fidelity card, you can add or subtract points from the total number recorded on it.

Operating procedure

1. Message for insertion of the chipcard if the card is not already inserted
2. The current number of points appears.
3. Starts the procedure for subtracting points
4. Starts the procedure for adding points
4. Number of points to add or subtract

SET 399 - CHIP CARD LOADING MANAGEMENT

Chip card loading management

Operating procedure

1.
2. To disable the chip card management (factory default).
- To enable the chip card management

SET 400 - PRINT SERIES 400 OPTIONS LIST

This function allows you to print the department programming: the departments printed are only those for which a field is programmed.

Operating procedure

1.
2. Start printing

Programming printing can be interrupted by pressing the key

SET 401 - SET INFORMATION FOR EACH DEPARTMENT

Programmable Parameters

For each department a number of parameters can be programmed, as indicated below:

	FUNCTION	PROGRAMMABLE FIELDS	FAC. SET.
1.	Department description	Max. 29 characters, alphanumeric	DEPT_nn
2.	Sale Price for Price list 1	Max. 8 figures (6+2 dec.)	0,00
3.	Sale Price for Price list 2	Max. 8 figures (6+2 dec.)	0,00
4.	Sale Price for Price list 3	Max. 8 figures (6+2 dec.)	0,00
5.	Sale Price for Price list 4	Max. 8 figures (6+2 dec.)	0,00
6.	Eco-contribution amount*	Max. 6 figures (4+2 dec.)	0,00
7.	Maximum Price (HALO)	Max. 8 figures (6+2 dec.)	0,00
8.	Minimum Price (LALO)	Max. 8 figures (6+2 dec.)	0,00
9.	VAT Rate reference	Max. from 0 to 8	NO TAX
10.	Merchandise Group reference	Max. 2 figures (max. 30)	0
11.	Enable Return (order)	0 = disabled / 1 = enabled	1
12.	Enable Discount	0 = disabled / 1 = enabled	1
13.	Enable Goods Refund	0 = disabled / 1 = enabled	1
14.	Enable Single item	0 = disabled / 1 = enabled	1
15.	Enable Bypass saved price	0 = disabled / 1 = enabled	1
16.	Offer reference*	Max. 1 figure (depends on the max. value set)	0

- To reprogram "NO TAX", enter **8** (note that TAX 8 cannot be modified and corresponds to the TAX EXEMPT setting).

The following table shows the result obtained during the sales phase from programming the various functions:

FUNCTION	RESULT
Department description	The department description is printed on the ticket
Sale Price for Price List 1	Sale price will be printed when the department key is pressed (with key "List 1")
Sale Price for Price List 2	Sale price will be printed when the department key is pressed (with key "List 2")
Sale Price for Price List 3	Sale price will be printed when the department key is pressed (with key "List 3")
Sale Price for Price List 4	Sale price will be printed when the department key is pressed (with key "List 4")
Eco-contribution reference*	Value printed on the sales ticket corresponding to the product sold
Maximum Price (HALO)	An item sale will not be permitted if the price entered at the keypad is higher than that programmed here.
Minimum Price (LALO)	An item sale will not be permitted if the price entered at the keypad is lower than that programmed here.
VAT Rate reference	Reference to programmed VAT rate (from 0 to 8) that allows calculation of the tax related to the sale by department
Merchandise Group reference	Sales will be assigned to the programmed merchandise group, and included in the final reports
Enable Return	If enabled, return operations can be performed for the department

* If programmed for option SET102.

SET 451 - PRINT INFORMATION OF ALL EJ USED BY MACHINE

This function is not supported by the cash register.

SET 452 - PRINT TICKET SELECTED BY NUMBER

This function is used to print a selected ticket. Follow the steps described in the procedure below.

Operating procedure

1.
2. Select the type of ticket from:
 fisca
 non fiscal
 all types
 invoice
 receipt
and press
3. Enter the number of the ticket and press
4. Enter the ticket date in the format DD-MM-YYYY and press

Note: if the ticket selected is not present, a message is displayed: TICKET MISSING.

Note: printing can be interrupted by pressing the key **C**.

SET 453 - PRINT TICKETS OF A GIVEN DATE

This function can be used to print the tickets issued on a certain date. Follow the steps described in the procedure.

Operating procedure

1.
2. Select the type of ticket from:
 fisca
 non fiscal
 all types
 invoice
 receipt
and press
3. Enter the ticket date in the format DD-MM-YYYY and press

Note: if the ticket selected is not found, a message is printed: TICKET MISSING.

Note: printing can be interrupted by pressing the key **C**.

SET 454 - PRINT TICKETS COMPRISED BETWEEN TWO NUMBERS

This function allows you to print the tickets comprised between two numbers following the steps described in the procedure.

Operating procedure

1.
2. Select the ticket type from:
 fisca
 non fiscal
 all types
 invoice
 receipt
and press
3. Enter the number of the first ticket and press
4. Enter the date of the first ticket in the format DD-MM-YYYY and press
5. Enter the number of the second ticket and press
6. Enter the date of the second ticket in the format DD-MM-YYYY and press

Note: if the selected ticket is not found, a message is displayed: TICKET MISSING.

Note: printing can be interrupted by pressing the key **C**.

SET 455 - PRINT TICKETS COMPRISED BETWEEN TWO DATES

This function allows you to print the tickets comprised between two dates. Follow the steps described in the procedure below.

Operating procedure

1.
2. Select the ticket type from:
 fisca
 non fiscal
 all types
 invoice
 receipt
and press
3. Enter the date of the first ticket in the format DD-MM-YYYY and press
4. Enter the date of the second ticket in the format DD-MM-YYYY and press

Note: if the selected ticket is not found, a message is displayed: TICKET MISSING.

Note: printing can be interrupted by pressing the key **C**.

SET 458 - FULL PRINTING OF EJ

This function allows you to print the entire contents of the Electronic Journal.

Operating procedure

1. Starts printing directly

Note: printing can be interrupted by pressing the key **C**.

SET 459 - EJ DELETION

This function allows you to delete the entire contents of the Electronic Journal.

Note: before the EJ is deleted you are requested to print the report Z10 and when the deleted is terminated, will be request to open the hatch.

SET 460 - PRINT CURRENT EJ INFORMATION

This function allows you to print the information relative to the EJ currently in use.

Operating procedure

1. Starts printing directly
[*PRINT EJ INFO* Press to confirm and start printing.
CONFIRM?]

Note: printing can be interrupted by pressing the key **C**.

SET 461 - EJ FREE SPACE MANAGEMENT

This function allows you to display the information related to the free space on the EJ currently in use.

Operating procedure

1. Displays the percentage still available on the screen

SET 510 - PRINT SERIES 510 OPTIONS LIST

SET 510 is used to print the programming of PLUs in "direct mode". For each PLU, the following parameters are provided on the printout:

- PLU description
- Numerical position of the key related to the PLU
- Page number
- Short code to select the PLU during the sales operation
- PLU barcode.

This function is used to print the personal details of the operators programmed.

1.

6	0	0
---	---	---
2.

X

 Start printing

FUNCTION	PROGRAMMABLE FIELDS	FACTORY SETTINGS
Personal code	Up to 4 numerical chars. each (starting from 0)	
Description	Up to 29 alphanumerical chars.	OPERATOR_1
Enable Permission level	0=Supervisor, 1=Cashier, 2=Waiter 0 = disabled / 1 = enabled	0

The sizes of the programming fields depend on the value set with the option 102.

1.

6	0	1	X
---	---	---	---

2. **[operator number 1 to 20]**

X

 To select the operator
3.

X

 To confirm the CODE and continue to the
or
description field
[new personal code]

X

or
to enter and confirm the personal code
[old personal code]

X

[new personal code]

X

 to modify the code already programmed
4.

X

 to confirm the description programmed
or
[ALPHANUMERIC CHARS] to set the new description (max. 29 chars)

X

 to confirm the new description
[ALPHANUMERIC CHARS] to set the permission levels (0,1 or 2)

X

 to confirm the new description
5.

0	X
---	---

 to disable the operator

1	X
---	---

 to enable the operator

SET 650 - PRINT SERIES 650 OPTIONS LIST

This function allows you to print the options relative to programming the personal details for the customer accounts.

Operating procedure

1. Starts printing

Note: printing can be interrupted by pressing the key **C**.

SET 651 - SET INFORMATION FOR EACH ACCOUNT

This function is used to program the personal details of each customer account.

Operating procedure

1.
2. Enter the number of customer accounts desired (factory setting 1) and press
3. Set the details for account 1
press
4. Enter the description for account 1 and press
5. Enter the description for account 1 and press
6. Enter the VAT NO./TAX CODE for account 1 and press
 Enter the maximum credit limit and press

SET 652 - DELETE CUSTOMER ACCOUNT INFORMATION

This function is used to delete the personal details programmed for a selected customer account.

Operating procedure

1.
2. Enter the number of the customer account required
and press
3. Set the attributes for account 1
press

Note: if the account is active, it cannot be deleted.

SET 653 - DELETE INFORMATION OF MORE THAN ONE ACCOUNT

This function allows you to delete the personal details programmed for multiple customer accounts.

Operating procedure

1.
2. **[FROM ACCOUNT]** Enter the number of customer account from which to start deletion
and press
3. **[TO ACCOUNT]** Enter the number of final customer account
and press

Note: if an account is active it cannot be deleted.

SET 654 - DELETE ALL CUSTOMER ACCOUNTS

This function allows you to delete all personal details programmed for customer accounts.

Operating procedure

1.
[DELETE ALL CONFIRM?] Press to confirm

SET 800 - PRINT BCR PLU INFORMATION READ AS CODE

Prints the PLU programming information.

Operating procedure

1.

2. When using a barcode reader, pass the optical reader over the item's barcode so that it is read. The code is displayed on the operator display and an acoustic signal emitted to indicate that reading has terminated.

To manually enter a barcode, select the type of barcode then press the **[alphanumeric keys]** corresponding to the code to save in memory. Press the key to confirm and proceed to the next programmable function.

The PLU selected is printed

3.

- | | | |
|--------------------------------|--------------------------------|---|
| <input type="text" value="0"/> | <input type="text" value="X"/> | To print the single PLU |
| <input type="text" value="1"/> | <input type="text" value="X"/> | To print all items with the EAN-13 code |
| <input type="text" value="2"/> | <input type="text" value="X"/> | To print all items with the EAN-8 code |
| <input type="text" value="3"/> | <input type="text" value="X"/> | To print all items with the UPC-A code |
| <input type="text" value="4"/> | <input type="text" value="X"/> | To print all items with the UPC-E code |
| <input type="text" value="5"/> | <input type="text" value="X"/> | To print all items with the Pharmacy code |
| <input type="text" value="6"/> | <input type="text" value="X"/> | To print all items with the C39 code |
| <input type="text" value="7"/> | <input type="text" value="X"/> | To print all items with the Balance code |
| <input type="text" value="8"/> | <input type="text" value="X"/> | To print all items |


4. Continue with other PLUs

Total	Press this key to exit from the printing procedure and return to the beginning of SET mode.
------------------------------------	---

SELLING ITEMS BY DEPARTMENT

For sales by department, the department key (DEPT_XX) is programmed and linked to an item, and can be used directly for performing sales operations.
The maximum number of items that can be programmed for this mode is 250.

Operating Procedure

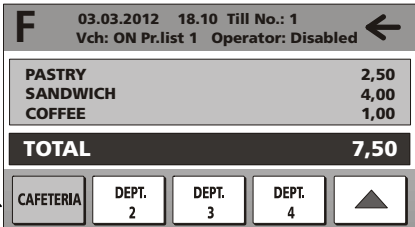
1.	SET VAT RATE (Set setup environment)	For the VAT rate, you can program a description and the related value (for more information refer to the chapter related to setting the VAT rate – SET308). Note: if sales operations have been performed, report printing is requested.
2.	PROGRAM DEPARTMENTS (Set setup environment)	Program the departments using the SET 401 command (in the example in the window below CAFETERIA is programmed). For each DEPT , as described in chapter “Programming Departments - Code 401” – to which you should refer to more details – a price and other optional parameters can be entered. For more information, refer to the chapter related to department programming – SET401.
3.	DEPARTMENT	

SELLING ITEMS BELONGING TO A DEPARTMENT

For sales of an item belonging to a department, an item (PLU) must be linked to the department. The item can then be accessed after selecting first the department.

Note: If more than 15 PLUs are programmed, the remainder are displayed in the following pages viewable using the keys: **[Previous]** and **[Next]**.

Operating Procedure

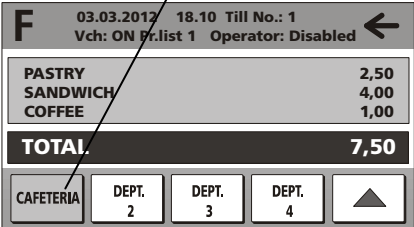1.	SET VAT RATE (Set setup environment)	For the VAT rate, you can program a description and the related value (for more information refer to the chapter related to setting the VAT rate – SET308).
2.	PROGRAM DEPARTMENTS (Set setup environment)	Program the departments using the SET 401 command (in the example below CAFETERIA is programmed). DEPARTMENT  The screenshot shows a terminal screen with the title 'DEPARTMENT'. At the top, it displays 'F 03.03.2012 18.10 Till No.: 1' and 'Vch: ON Pr.list 1 Operator: Disabled' with a left arrow. Below this is a list of items: 'PASTRY 2,50', 'SANDWICH 4,00', and 'COFFEE 1,00'. A 'TOTAL' line shows '7,50'. At the bottom, there are buttons for 'CAFETERIA', 'DEPT. 2', 'DEPT. 3', 'DEPT. 4', and an up arrow. An arrow points from the word 'CAFETERIA' in the text above to the 'CAFETERIA' button on the screen.
3.	PROGRAM ITEMS (PLU) (Set setup environment)	Program the items (PLU) using the SET 802 command (in the example below COFFEE, TEA, CAPPUCCINO, are programmed). For each ITEM/PLU enter the price, other optional parameters and the DEPT to which it belongs. For more information, refer to the chapter related to item programming – SET802.


4.

LINK PROGRAMMING TO KEY


Program the link of the Departments (PLU) to a key on the Sales keyboard.

- Select the "PLU Management"
- Select the department you require by touching it in the "Dept List" (such as CAFETERIA).
- Select the PLU you require by touching it in the "Item List" (such as COFFEE).
- Select the key in the window to which you want to create the link by touching it or select "Assign to free position".

In this way, the CAFETERIA key is created on the Sales keyboard that, if selected, displays a second Sales window where the COFFEE key is present).

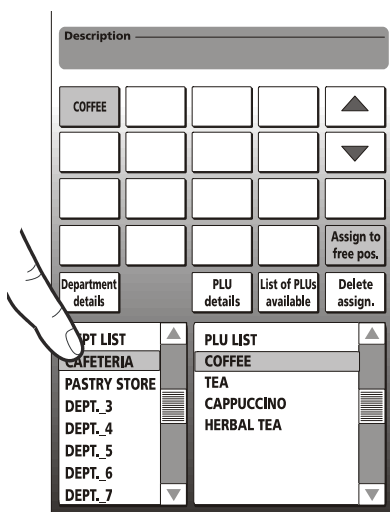

5.

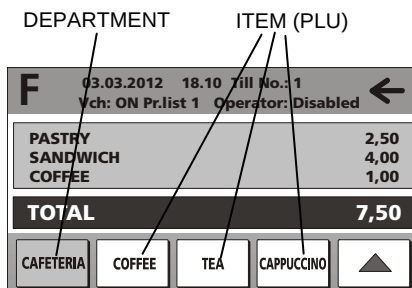

SET 801 - FORMAT BCR PLU AREA

You can use the programming code **SET 801** to restore the programmable parameters of the PLUs to their factory values.

Operating procedure

1.
2. To confirm. A message appears on the operator display asking you to confirm execution of the formatting function.

 Cancel command. The cash register returns to the beginning of SET mode.

During the procedure you are requested for all the parameters you want to set during formatting:

- number of price lists
- descriptor length
- offer link
- WEEE contrib..
- periodic 2.
- Number in stock.

SET 802 - INSERT NEW BCR PLU

Operating procedure

1. 8 0 2 X

2. **[READ BARCODE]** When using a barcode reader, pass the optical reader over the barcode of the item so that it is read. The code is displayed on the operator display and an acoustic signal emitted to indicate that reading has terminated. To manually enter the barcode:
 - Select the type of barcode: EAN-UPC, C39.
 - Enter the alphanumerical code of the item to save using the keypad.Press the X key to confirm and proceed to the next programmable function.

3. **[INSERTION
EAN/UPC BARCODE
or C-39 CODE]** To save items without the assistance of a barcode, select the C39 type that allows descriptive strings to be entered for an item or for generic PLUs (such as Coffee). For example:
 - When you select C39, on the screen appears:

INSERTION
PLU CODE C-39
 - Enter the descriptive string you want (as in the previous example, coffee) and press X
 - You are then requested to enter the PLU CODE. Enter the description of the item inserted (as in the previous example, coffee). The description inserted in this field will be printed on the ticket and shown in the ticket on the touch screen.

4. **[EAN/UPC or C-39 CODE]** Next enter the parameters for the item (prices 1,2,3,4, **[PR1, PR2,PR3,PR4,DEPT.0]** **department linked** etc.) to associate a key to the item.

5. Total Press this key to interrupt programming the selected parameter, that nevertheless remains configured, and return the cash register to the beginning of SET mode.

6. Subtotal Press this key to interrupt programming the parameter selected, that nevertheless remains configured, and skip to program the same parameter for the next department.

-
- If you want to change the number of the department to which a PLU is linked, you must first run the (Z10) report in Z operation mode.
-

Operating procedure

1.
2. If you want to use the barcode reader, pass the optical reader over the item's barcode so that it is read. The code is displayed on the operator screen and an acoustic signal emitted to indicate that reading has terminated.

If, on the other hand, you want to enter the barcode manually, first select the type of code, then press the **[alphanumeric keys]** corresponding to the code to save. Press the key to confirm and continue to the next programmable function.

A message is printed to indicate that the PLU has been deleted.

SET 804 - MODIFY BCR PLU

Operating procedure

1. **[8][0][4][X]**
2. **[READ BARCODE]** When using a barcode reader, pass the optical reader over the barcode of the item so that it is read. The code is displayed on the operator display and an acoustic signal emitted to indicate that reading has terminated. To manually enter the barcode:
- Select the type of barcode: EAN-UPC, C39.
 - Enter the alphanumerical code of the item to save using the keypad.
- Press the **[X]** key to confirm and proceed to the next programmable function.
3. **[INSERTION EAN/UPC BARCODE or C-39 CODE]** To save items without the assistance of a barcode, select the C39 type that allows descriptive strings to be entered for an item or for generic PLUs (such as Coffee). For example:
- [X]** - When you select C39, on the screen appears:
- | |
|----------------------|
| INSERTION |
| PLU CODE C-39 |
- Enter the descriptive string you want (as in the previous example, coffee) and press **[X]**
 - You are then requested to enter the PLU CODE. Enter the description of the item inserted (as in the previous example, coffee). The description inserted in this field will be printed on the ticket and shown in the ticket on the touch screen.
4. **[EAN/UPC or C-39 CODE]** Next enter the parameters for the item (prices 1,2,3,4, **[PR1, PR2,PR3,PR4,DEPT.0]** **department linked** etc.) to associate a key to the item.
5. **Total** Press this key to interrupt programming the selected parameter, that nevertheless remains configured, and return the cash register to the beginning of SET mode.
6. **Subtotal** Press this key to interrupt programming the parameter selected, that nevertheless remains configured, and skip to program the same parameter for the next department.

-
- If you want to change the number of the department to which a PLU is linked, you must first run the (Z10) report in Z operation mode.
-

PROGRAMMING THE SERIAL INTERFACES

The devices that can be connected to the cash register via the serial interfaces are the personal computer, barcode reader and the slip printer.

Code **905** allows you to configure the connection of the devices to the two serial interfaces.

The parameters for serial interfaces 1 and 2 can be configured, respectively, with code **901** and code **903**.

To reset the parameter values to their factory settings, use code **902** for interface 1 and code **904** for interface 2.

Before connecting the PC, BARCODE READER and SLIP PRINTER to the cash register, follow the instructions below in the order indicated :

- In SET mode, using programming code 905, select the types of devices to be connected to serial interfaces 1 and 2.
- If you need to modify the parameters of either serial interface, in SET mode use the appropriate programming code - code 901 for serial interface 1 and code 903 for serial interface 2.
- Switch off the cash register and the devices to be connected
- Connect the devices to the cash register
- Switch on the cash register and then the devices connected to it

To disconnect the devices from the cash register, follow the instructions below in the order given :

- Switch off first the cash register, then all the devices connected to it
- Disconnect the devices from the cash register
- Switch on the cash register.

SET 900 - PRINT SERIES 900 OPTIONS LIST

Operating procedure

1.
2. Start printing

SET 901 - SET SERIAL CHANNEL 1 INFORMATION
SET 903 - SET SERIAL CHANNEL 2 INFORMATION

The values set automatically are the defaults. You can subsequently modify these values using code 901 (for serial 1) and code 903 (for serial 2).

Programmable parameters

DESCRIPTION	Factory settings for connection of a PC	Factory settings for connection of BARCODE READER
Power supply	DISABLED	ENABLED
Modem signals	Disabled	Disabled
Baud rate	9600	9600
Data bits	8	7
Stop bits	1	1
Parity	No	Even
ACK/NACK time-out	3000	0
Session time-out	0	0
Number of retries	2	0

The values set automatically are the defaults or those set by the user.

Operating procedure

1. **9** **0** **1** **X** or **9** **0** **3** **X**
2. **0** **X** To disable the 5V power supply to the connector output.
1 **X** To enable the 5V power supply to the connector output.
3. **0** **X** To disable the modem signals.
1 **X** To enable the modem signals.
4. To select the baud rate:
0 **X** 300
1 **X** 600
2 **X** 1200
3 **X** 2400
4 **X** 4800
5 **X** 9600
6 **X** 19200
7 **X** 38400
8 **X** 57600
9 **X** 115200
5. **0** **X** To program the data bits as 7
1 **X** To program the data bits as 8
6. **0** **X** To program the number of stop bits as 1
1 **X** To program the number of stop bits as 2
7. **0** **X** To program "no parity"
1 **X** To program "odd parity"
2 **X** To program "even parity"
8. **[Numeric Chars]** **X** To program ACK/NACK time-out (between 0 and 30,000 ms).
9. **[Numeric Chars]** **X** To program the session time-out (between 0 and 30,000 ms).
10. **[Numeric Chars]** **X** To program the number of retries (from 0 to 250).

SET 902 - LOADING SERIAL CHANNEL 1 DEVICE
SET 904 - LOADING SERIAL CHANNEL 2 DEFAULT

Programming codes SET 902 and 904 can be used to reset the serial interface 1 and serial interface 2 parameters to their default values.

Operating procedure

1.

9	0	2	X
9	0	4	X

or

X
C

 To confirm loading of the factory-set parameter values.
Cancel command.
The cash register returns to the beginning of SET mode.

SET 905 - SERIAL DEVICE CONFIGURE

Operating procedure

1.

9	0	5	X
---	---	---	---
2.

Serial 1 Device	Serial 2 Device
-----------------	-----------------
3.

<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>0</td><td>X</td></tr><tr><td>1</td><td>X</td></tr><tr><td>2</td><td>X</td></tr><tr><td>3</td><td>X</td></tr></table> Barcode reader *	0	X	1	X	2	X	3	X	Personal Computer *
0	X								
1	X								
2	X								
3	X								
Personal Computer	Barcode reader								
Barcode reader	Slip printer								
Personal Computer	Slip printer								

* Factory setting:

SET 906 - ENABLE USB CONNECTION

Operating procedure

1.

9	0	6	X
---	---	---	---
2.

<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>0</td><td>X</td></tr><tr><td>1</td><td>X</td></tr></table>	0	X	1	X	To disable the USB interface To enable the USB interface
0	X				
1	X				

When the USB interface is enabled, the serial interface on which the personal computer is configured is deactivated.

SET 919 - ENABLE NETWORK SERVICES (OPTIONAL SETTINGS)

This is used to enable network services.

Operating procedure

1.
2. DISABLED = 0
ENABLED = 1.

SET 920 - ETH ACTIVATION PARAMETERS (OPTIONAL SETTINGS)


This is used to enable a network port of Ethernet type.

Operating procedure

1.
2. DISABLED = 0
ENABLED = 1.
3. **[FRIENDLY NAME]** Name for identifying the device on the network. The system proposes the factory setting: Nettuna3000
To change this name, enter the name you want on the keypad.

SET 921 - CHANNEL 1 ETH SETTINGS
SET 922 – CHANNEL 2 WLAN SETTINGS
SET 923 – PPP SETTINGS
SET 924 – WIFI SETTINGS
SET 925 – ADSL SETTINGS
SET 926 – FTP SETTINGS
SET 927 – SNMP SETTINGS
SET 928 – HSDPA SETTINGS
SET 929 – VPN SETTINGS
SET930 - ETH ADVANCED SETTINGS (OPTIO SETTINGS)

The cash register is able to connect to different types of network, but principally: Ethernet, wireless (Wlan), ppp protocol, adsl, ftp, HSDPA, VPN. As for any other device on the market using these technologies, specific configuration parameters must be set for each of these modes. In the following an example is given of how the various interfaces can be configured.

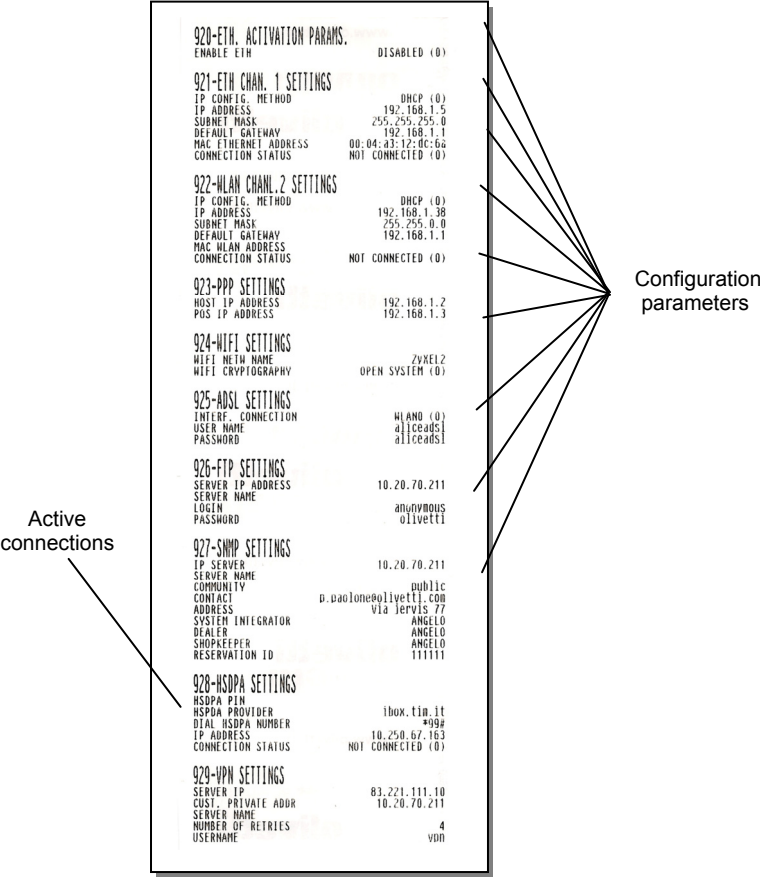

SET 931 - SELECT FW UPDATE MODE (OPTIONAL SETTINGS)

This command enables or disables firmware updating mode.

Operating procedure

1.
2. WITH CONFIRM ; if you choose to update the firmware, confirmation is required
 AUTOMATIC; the firmware is updated automatically (default setting).

SET 932 - SELECT DB UPDATE MODE (OPTIONAL SETTINGS)

This command enables or disables the internal database updating mode of the cash register.

Operating procedure

1.
2. WITH CONFIRM ; if you choose to update the database, confirmation is required
 AUTOMATIC; the database is updated automatically (default setting).

SET 933 – TEST NETWORK (OPTIONAL SETTINGS)

This command print the information about the network connection.

Operating procedure

1. Print information network connection.

SET 950 – SET SLIP PRINTER INFORMATION
SET 951 - CALIBRATE SLIP PRINTER MODULE

PROGRAMMING DOCUMENT MANAGEMENT ON THE EXTERNAL PRINTER

After connecting the printer or slip printer, and selecting and programming the required parameters, you must program document management for Invoices.

The programming code is **SET 950**.

PRINTER PROGRAMMABLE PARAMETERS: OLIVETTI PR4 SL, EPSON TM 290, EPSON TM 295, STAR SP 298

	Select printer	1 = Selects Olivetti PR4 SL 2 = Selects Epson TM 290 3 = Selects Epson TM 295 4 = Selects STAR SP 298 5 = Selects PRT100Marker		
Programmable parameters				
PARAMETER	FUNCTION	PROGRAMMING VALUES		
		minimum	maximum	factory
1	Width of the header area corresponding to the pre-printed area of the document.	0	20	0
2	Body text area of document.	10	200	35
3	Enables or disables the same header printed on tickets to be used also on invoices / receipts.	1 enabled	0 disabled	0 disabled
4	Invoice Series identifiable with alphanumerical characters	1	3	A
5	Starting value for (progressively) numbering receipts	1	99999	1

PARAMETER	FUNCTION	PROGRAMMABLE VALUES		
		minimum	maximum	factory
6	Starting value for (progressively). numbering invoices	1	99999	1
7	Compact document (type of form). You can specify whether the body text area must be completed automatically with interlines, so that the invoice / receipt total and following text appear under the text area. In the opposite case, interlines are not inserted, and the invoice / receipt total and following text are printed immediately after the sales items.	1 enabled	0 disabled	1 enabled
8	Enable / disable copying to EJ of tickets not COPY INVOICE or RECEIPT.	1 enabled	0 disabled	1 enabled
9	Enable / disable definition of unit price	1 enabled	0 disabled	0 disabled


PROGRAMMABLE PARAMETERS FOR PRT 100 MARKER PRINTER

	Selects printer	5 = Selects PRT100Marker		
Programmable parameters				
PARAMETER	FUNCTION	PROGRAMMABLE VALUES		
		minimum	maximum	factory
1	Module length expressed in printing lines	10	90	52
2	In the case of a pre-printed form, number of pre-printed lines at the top	0	20	0

PARAMETER	FUNCTION	PROGRAMMABLE VALUES		
		minimum	maximum	factory
3	In the case of a pre-printed form, number of pre-printed rows at the end.	0	30	0
4	Enables / disables the same header printed on tickets to be printed also on invoices and receipts.	1 enabled	0 disabled	0 disabled
5	Invoice Series identified by alphanumerical characters	1	3	A
6	Starting value for numbering receipts (progressively).	1	99999	1
7	Starting value for numbering invoices (progressively).	1	99999	1
8	Compact document (type of form). You can specify whether the body text must be completed automatically with interlines so that the invoice / receipt total and following text are positioned under the text area. In the opposite case, interlines are not inserted, and the invoice / receipt total and following text appear immediately after the sales items.	1 enabled	0 disabled	1 enabled
9	Enables / disables copying to EJ of tickets not COPY/INVOICE/ RECEIPT.	1 enabled	0 disabled	1 enabled
10	Enables / disables definition of single unit price	1 enabled	0 disabled	0 disabled

LAYOUT OF THE DOCUMENT FOR INVOICE OR RECEIPT

In the following figure is illustrated the layout of the document for the Invoice or Receipt, with indications of how the various fields are ordered.

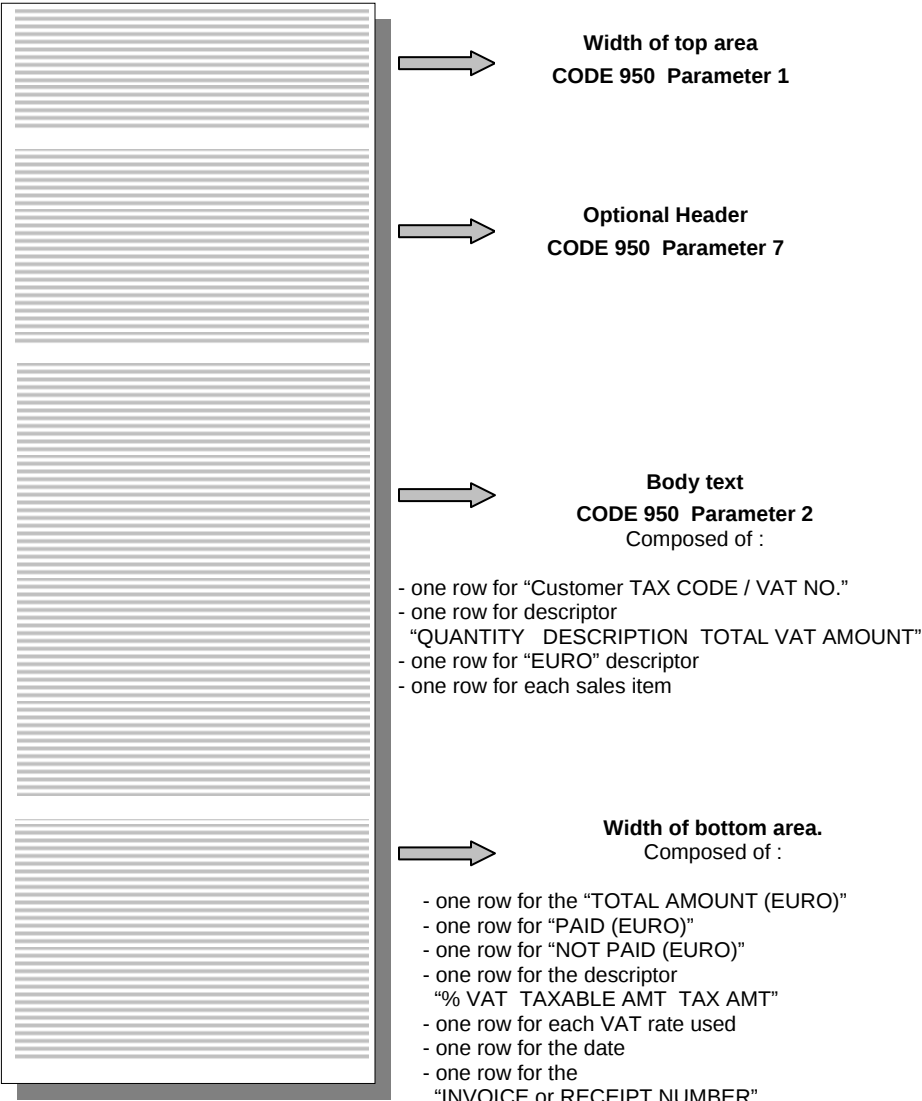

Operating procedure

1.

9	5	0	X
---	---	---	---
2.

[ALPHANUMERICAL CHARS]	X
------------------------	---

 Set all the parameters that are requested, referring to the tables for slip printer printing.

DEFINE THE BODY TEXT LINES FOR THE SLIP PRINTER – SET 951

To print on an external printer of slip printer type, you must know the number of body text lines that can be printed by the slip printer for the invoice/ticket.

The number of body text lines must be specified for the option SET950.

1. **9 5 1 X** The ticket is printed on the slip printer with the following indications:

```

REGTR:
01-01-2012
TICKET NUMBER

                                01
                                00:04
                                3

                                GUIDED PROCEDURE
                                FOR MEASUREMENT
                                OF THE FORM LENGTH

                                TO MEASURE
                                INSERT THE FORM AND
                                PRESS THE 'X' KEY

                                TO EXIT
                                PRESS THE 'Cancel' KEY

=====

                                FORM LENGTH MEASUREMENT
                                PERFORMED SUCCESSFULLY

                                FOLLOW THE INSTRUCTIONS
                                PRINTED ON THE FORM

=====

```

2. ☒ Wait until the slip printer finishes printing, then read the value calculated on the last line.

THE FOLLOWING PRINTOUT PROVIDES	1
A SUITABLE INSTRUMENT	2
FOR MEASURING THE LENGTH	3
OF THE MODULE USED	4
FOR ISSUING FISCAL INVOICES.	5
	6
	7
WHEN PRINTING FINISHES	8
YOU MUST ENTER THE NUMERIC	9
VALUE PRINTED AT THE	10
END OF THE MODULE IN	11
THE OPTION <SET 95>	12
ITEM 'BODY LINES'.	13
	14
THIS VALUE REPRESENTS	15
THE MAXIMUM NO. OF LINES	16
THAT CAN BE PRINTED	17
ON THE MODULE USED.	18
_____LINE MEASUREMENT _____	19
_____LINE MEASUREMENT _____	20
_____LINE MEASUREMENT _____	21
_____LINE MEASUREMENT _____	22
_____LINE MEASUREMENT _____	23
_____LINE MEASUREMENT _____	24
_____LINE MEASUREMENT _____	25
_____LINE MEASUREMENT _____	50
_____LINE MEASUREMENT _____	51
_____LINE MEASUREMENT _____	52
_____LINE MEASUREMENT _____	53
_____LINE MEASUREMENT _____	54
_____LINE MEASUREMENT _____	55

- Using SET 950, enter the value obtained for the parameter "Body text"; in the example above 57.

A. ICON CLASSIFICATIONS AND LIST OF PROMOTIONAL PHRASES

ICON GENERAL CLASSIFICATIONS – MERCHANDISE CATEGORIES

FOOD

- Wine shop
- Grocery shop
- Fruit - Vegetables
- Gastronomy
- Butcher's shop
- Equine butcher's
- Bakery
- Pastry shop
- Pasta shop
- Fishmonger's
- Poulterer
- Delicatessen - Cheeses
- Frozen food

1  THE WHOLE WORLD IN A BOTTLE	2  THE WHOLE WORLD IN A BOTTLE	11  FRESH, GENUINE MEAT PRODUCTS FOR YOUR TABLE	12  FRESH, GENUINE MEAT PRODUCTS FOR YOUR TABLE
WINE SHOP		EQUINE BUTCHER'S	
3  ALL THE SCENTS, ALL THE ESSENCES CHOSEN JUST FOR YOU	4  A VAST SELECTION OF PRODUCTS FOR YOUR HOME	13  THE PERFUME AND TASTE OF HOME-MADE PASTA	14  THE PERFUME AND TASTE OF HOME-MADE PASTA
GROCERY SHOP		BAKERY	
5  A VEGETABLE GARDEN AND AN ORCHARD AT YOUR DOOR	6  A VEGETABLE GARDEN AND ORCHARD AT YOUR DOOR	15  DESSERTS, CAKES, PASTRIES AND FANTASY	16  DESSERTS, CAKES, PASTRIES AND FANTASY
FRUIT - VEGETABLES		PASTRY SHOP	
7  THE PLEASURE FROM SAVOURING GOOD THINGS	8  THE PLEASURE FROM SAVOURING GOOD THINGS	17  THE PERFUME AND TASTE OF HOME-MADE PASTA	18  THE PERFUME AND TASTE OF HOME-MADE PASTA
GASTRONOMY		BAKERY	
9  FRESH, GENUINE MEAT PRODUCTS FOR YOUR TABLE	10  FRESH, GENUINE MEAT PRODUCTS FOR YOUR TABLE	19  A GUARANTEE OF ONLY THE FRESHEST FISH	20  A GUARANTEE OF ONLY THE FRESHEST FISH
BUTCHER'S SHOP		FISHMONGER'S	

21	22
 CHICKEN, MEAT AND SALAMI LIKE HOME-RAISED POULTERER	 CHICKEN, MEAT AND SALAMI LIKE HOME-RAISED
23	24
 THE BEST CHEESES CARRY OUR NAME	 THE BEST CHEESES CARRY OUR NAME
DELICATESSEN - CHEESES	
25	26
 THE COLD FRIEND OF FRESH PRODUCE	 THE COLD FRIEND OF FRESH PRODUCE
FROZEN FOOD	

CLOTHES

- Kids
 - Shoes
 - Shirts
 - Hats
 - Ladieswear
- Lingerie
 - Leather goods
 - Textiles
 - Sportswear
 - Menswear

27  THE WORLD OF THE YOUNG KIDS	28  THE WORLD OF THE YOUNG	37  LINGERIE LINGERIE	38  LINGERIE LINGERIE
29  WALKING TOGETHER SHOES	30  WALKING TOGETHER	39  LEATHER BAGS REAL LEATHER TRAVEL ARTICLES GUARANTEED LEATHER GOODS	40  LEATHER BAGS REAL LEATHER TRAVEL ARTICLES GUARANTEED
31  THE SHIRT THAT SETS YOU APART SHIRTS	32  THE SHIRT THAT SETS YOU APART	41  FABRICS LATEST IDEAS CLASSIC TEXTILES	42  FABRICS LATEST IDEAS CLASSIC
33  YOU HAVE MADE A WISE CHOICE HATS	34  YOU HAVE MADE A WISE CHOICE	43  SPORT AND HEALTH GO HAND IN HAND SPORTSWEAR	44  SPORT AND HEALTH GO HAND IN HAND
35  JUST FOR WOMEN LADIESWEAR	36  JUST FOR WOMEN	45  EXCLUSIVE MENSWEAR MENSWEAR	46  EXCLUSIVE MENSWEAR

CATERING

- Bar - Café
- Public House
- Ice-cream Parlour
- Sandwich Bar
- Pasta Restaurant
- Pizza Restaurant
- Snack Bar

51	52
 THE FIVE STAR ICE-CREAM	 THE FIVE STAR ICE-CREAM

ICE-CREAM PARLOUR

53	54
 ENJOY A RELAXED TIME IN GOOD COMPANY	 ENJOY A RELAXED TIME IN GOOD COMPANY

SANDWICH BAR

55	56
 AT YOUR SERVICE OUR QUALITY AND COURTESY	 AT YOUR SERVICE OUR QUALITY AND COURTESY

PIZZA RESTAURANT

47	48	57	58
 YOUR MEETING PLACE	 YOUR MEETING PLACE	 A CONTINUOUS THREAD OF PASTA & FANTASY	 A CONTINUOUS THREAD OF PASTA & FANTASY

BAR - CAFE

PASTA HOUSE

49	50	59	60
 ENJOY A RELAXED TIME IN GOOD COMPANY	 ENJOY A RELAXED TIME IN GOOD COMPANY	 AT YOUR SERVICE OUR QUALITY AND COURTESY	 AT YOUR SERVICE OUR QUALITY AND COURTESY

PUBLIC HOUSE

SNACK BAR

61  PRECIOUS AND EXCLUSIVE FOR EXCEPTIONAL PERSONS JEWELLERY	65  ABSOLUTELY EVERYTHING FOR A WORLD OF COLOUR PAINTS	BUILDING – PAINT SUPPLIERS • Paints • Bricks - Cement • Marble - Tiles • Upholstery - Carpets • Sanitaryware – Bathroom Furnishings
62  THE SURE CHARM OF ALL ANTIQUE OBJECTS ANTIQUES	66  BUILDING SAFELY BRICKS - CEMENT	
63  PRECIOUS AND EXCLUSIVE FOR EXCEPTIONAL PERSONS GOLDSMITH	67  ELEGANT MATERIALS FOR FURNISHINGS MARBLE - TILES	
64  THE FORECAST JUST FOR YOU GOLDSMITH	68  THE SURE CHOICE FOR TASTEFUL FURNISHINGS UPHOLSTERY - CARPETS	
VALUABLE GOODS • Jewellery • Antiques • Goldsmith • Clocks and watches	69  THE SURE CHOICE FOR TASTEFUL FURNISHINGS SANITARYWARE – BATHROOM FURNISHINGS	

70



A
HIGH
FIDELITY
SHOP

HF RADIO ACCESSORIES

72



THE SHOP
THAT PROVIDES
YOU
HELP AND
ADVICE

COMPUTERS AND ACCESSORIES

71



A
HIGH
FIDELITY
SHOP

VHS CASSETTES

73



A
HIGH
FIDELITY
SHOP

CDs -DISKS

ELECTRONICS

- HF radio accessories
- VHS cassettes
- Computers and accessories
- Music cassettes - Disks
- Household goods
- Radio - Televisions
- Musical instruments

74



THE SHOP
THAT PROVIDES
YOU HELP AND
ADVICE

HOUSEHOLD GOODS

75



A
HIGH
FIDELITY
SHOP

RADIO - TELEVISIONS

76



YOUR
MUSIC
IN
HARMONY

MUSICAL INSTRUMENTS

STATIONERY - TOYS

- School & office stationery
- Stationery
- Toys
- Books

COSMETICS

- Fashion jewellery
- Herbal products
- Cosmetics
- Perfumes

77  EVERYTHING FOR THE HOME, OFFICE AND SCHOOL OFFICE & SCHOOL STATIONERY	81  NEW, EXCLUSIVE UNUSUAL CREATIONS FASHION JEWELLERY
78  EVERYTHING FOR THE HOME, OFFICE AND SCHOOL STATIONERY	82  NATURE, ITS HERBS AND NATURAL PRODUCTS HERBAL PRODUCTS
79  A FABULOUS WORLD FOR THE YOUNG AND NOT SO YOUNG TOYS	83  A SPACE FOR BEAUTY AND BODY CARE COSMETICS
80  A BOOK FOR A FRIEND BOOKS	84  A SPACE FOR BEAUTY AND BODY CARE PERFUMES

ANIMALS

- Animal supplies
- Pets
- Fish and aquariums

GARDENING

- Gardening supplies
- Equipment and fertilizers
- Flowers and plants

AUTOMOTIVE - MOTOBIKE - BICYCLE

- Car accessories and spare parts
- Motorbike/bicycle accessories and spare parts

85  EVERYTHING FOR OUR FRIENDS ANIMAL SUPPLIES	88  CULTIVATE, CARE FOR AND CREATE IN HARMONY WITH NATURE GARDENING SUPPLIES	91  ALL ACCESSORIES AND SPARE PARTS ITEM BY ITEM CAR ACCESSORIES AND SPARE PARTS
86  EVERYTHING FOR OUR FRIENDS PETS	89  CULTIVATE, CARE FOR AND CREATE IN HARMONY WITH NATURE EQUIPMENT AND FERTILIZERS	92  ALL ACCESSORIES AND SPARE PARTS ITEM BY ITEM MOTORBIKE ACCESSORIES AND SPARE PARTS
87  EVERYTHING FOR THE UNDERWATER WORLD FISH AND ACQUARIUMS	90  CULTIVATE, CARE FOR AND CREATE IN HARMONY WITH NATURE FLOWERS AND PLANTS	93  EVERYTHING FOR TWO WHEELS BIKES

PHOTOGRAPHY - OPTICS

- Video - photo - optical equipment
- Scientific instruments

94  GIVE YOUR PICTURES THEIR JUST WORTH VIDEO PHOTO OPTICAL EQUIPMENT
95  A VAST RANGE OF PRODUCTS FOR YOU SCIENTIFIC INSTRUMENTS



HARDWARE ITEMS

96	
	EVERYTHING FOR AN ELEGANT WELCOMING HOME
HOUSEHOLD GOODS	

- Household goods
- Plumbing materials
- Heating systems
- Ironmongery
- Electrical materials
- Industrial metal products

97	
	EVERYTHING FOR ALL TYPES OF INSTALLATION
PLUMBING MATERIALS	
HEATING SYSTEMS	

WOOD - FURNITURE

- Frames - Pictures - Prints
- Wood - Carpentry
- Home - office furnishings

GLASSWARE - CERAMICS

- Light fixtures
- Porcellane - Pottery
- Glassware

98	
	EVERYTHING FOR ALL TYPES OF INSTALLATION

102	
	WE WILL PUT YOU RIGHT
FRAMES - PICTURES - PRINTS	

105	
	THE ART OF LIGHT
LIGHT FIXTURES	

99	
	FROM A BOLT TO A CRANE
IRONMONGERY	

103	
	THE ART OF WOOD
WOOD - CARPENTRY	

106	
	TIMELESS JEWELS
PORCELLANE - POTTERY	

100	
	EVERYTHING FOR ALL TYPES OF INSTALLATION
ELECTRICAL MATERIALS	

104	
	A CHOICE OF STYLE
HOME - OFFICE FURNITURE	

107	
	GLASS IN ALL ITS FORMS
GLASSWARE	

101	
	A VAST SELECTION OF PRODUCTS FOR YOU
INDUSTRIAL METAL PRODUCTS	

108	110	115
 HAPPY CHRISTMAS CHRISTMAS	 A DAY TO REMEMBER ST. VALENTINE'S DAY	 MOTHER'S DAY - BEST WISHES MOTHER'S DAY
109	111	116
 HAPPY NEW YEAR NEW YEAR	 HAVE A HAPPY CARNIVAL CARNIVAL	 HAVE A GOOD HOLIDAY VACATION
HOLIDAYS AND SPECIAL OCCASIONS • Christmas • New Year • St Valentine's Day • Carnival • Women's Day • Father's Day • Easter • Mother's Day • Vacation		
	112	
	 A DAY WORTH REMEMBERING WOMEN'S DAY	
	113	
	 FATHER'S DAY - BEST WISHES FATHER'S DAY	
	114	
	 HAPPY EASTER EASTER	

LIST OF PROMOTIONAL PHRASES

PHRASES	No.
AT YOUR SERVICE QUALITY AND COURTESY	25
TECHNICAL ARTICLES	91
YOU HAVE MADE A WISE CHOICE	15
ENJOY YOUR MEAL	78
HAPPY CHRISTMAS	59
HAPPY EASTER	65
HAVE A GOOD HOLIDAY	67
WALKING TOGETHER	13
FRESH, GENUINE MEAT PRODUCTS FOR YOUR TABLE	5
HE WHO LOVES NATURE LOVES LIFE	85
HE WHO FINDS A FRIEND FINDS A TREASURE	82
ASK FOR A HOME DELIVERY	70
CULTIVATE, CARE FOR AND CREATE IN HARMONY WITH NATURE	45
BUILDING SAFELY	31
NEW, EXCLUSIVE, UNUSUAL CREATIONS	42
FROM A BOLT TO A CRANE	53
GIVE YOUR PICTURES THEIR JUST WORTH	48
JUST FOR WOMEN	16
DESSERTS, CAKES, PASTRIES AND FANTASY	6
EXCLUSIVE MENSWEAR	21
HAPPY NEW YEAR	60
FATHER'S DAY – BEST WISHES -	64
MOTHER'S DAY – BEST WISHES	66
HAVE A HAPPY CARNIVAL	62
YOU HAVE WON A PRIZE	69
IDEAS AND FANTASY FOR THE HOME	106
FLOWERS FIND THE BEST WORDS FOR EVERY OCCASION	86
THE BEST CHEESES CARRY OUR NAME	10
ELEGANT MATERIALS FOR FURNISHINGS	32
FABRICS, LATEST IDEAS, CLASSIC	19
THE SURE CHARM OF ALL ANTIQUES OBJECTS	28
THE COLD FRIEND OF FRESH PRODUCE	11
THE FIVE-STAR ICE-CREAM	24
THE BEST FOR YOUR TABLE	72
THE WORLD OF THE YOUNG	12

PHRASES	No.
THE SHOP THAT PROVIDES YOU HELP AND ADVICE	36
THE PLEASURE FROM SAVOURING GOOD THINGS	4
PRECIOUS AND EXCLUSIVE FOR EXCEPTIONAL PERSONS	27
THE FORECAST JUST FOR YOU	29
VALUE THAT STANDS THE TEST OF TIME	80
GLASS IN ALL ITS FORMS	58
YOUR MEETING PLACE	22
LINGERIE	17
THE ART OF WOOD	54
THE ART OF LIGHT	56
A VEGETABLE GARDEN AND ORCHARD AT YOUR DOOR	3
GOOD FOOD LOVES QUALITY	74
THE SHIRT THAT SETS YOU APART	14
NATURE, ITS HERBS AND NATURAL PRODUCTS	43
NATURE FOR OUR WELL-BEING	101
THE SURE CHOICE FOR TASTEFUL FURNISHINGS	33
A GUARANTEE OF ONLY THE FRESHEST FISH	8
YOUR MUSIC IN HARMONY	35
A SPACE FOR BEAUTY AND BODY CARE	44
A DISTINCT STYLE	75
FASHION, QUALITY AND COURTESY	76
A HIGH FIDELITY SHOP	34
LEATHER BAGS, REAL LEATHER TRAVEL ARTICLES GUARANTEED	18
LET'S SPARE A THOUGHT FOR OUR SMALL FRIENDS	83
FOR YOUR HOME AND GIFT NEEDS	104
FOR A QUALITY-BASED CHOICE	105
FOR YOU ONLY THE BEST	73
FOR YOU A VAST RANGE OF PRODUCTS	93
CHICKEN, MEAT AND SALAMI LIKE HOME-RAISED	9
PRECIOUS OVER TIME	81
TIMELESS JEWELS	57
THE PERFUME AND TASTE OF HOME-MADE PASTA	7
PRODUCT AND SERVICE QUALITY	95
QUALITY AND COURTESY AT YOUR SERVICE	92
QUALITY, CHOICE AND SERVICE YOU CAN TRUST	94
WHEN YOU GIFT A FLOWER YOU GATHER A SMILE	87
REWARD YOURSELF A BREAK	77
WE WILL BE HAPPY TO PROVIDE YOU A HOME SERVICE	107

PHRASES	No.
SPORT AND HEALTH GO HAND IN HAND	20
ENJOY A RELAXED TIME IN GOOD COMPANY	23
INSTRUMENTS FOR WORK AND FREE TIME	90
WITHOUT COMPARISON	96
ALL ACCESSORIES AND SPARE PARTS ITEM BY ITEM	46
ALL THE SCENTS, ALL THE ESSENCES CHOSEN JUST FOR YOU	2
ALL PRODUCTS OF ALL BRANDS	88
EVERYTHING FOR AN ELEGANT, WELCOMING HOME	50
THE ALLURE OF BEAUTY	100
THE WHOLE WORLD IN A BOTTLE	1
EVERYTHING FOR THE HOME, OFFICE AND SCHOOL	39
EVERYTHING FOR OUR FRIENDS	37
EVERYTHING FOR THE UNDERWATER WORLD	38
EVERYTHING FOR THE OFFICE AND SCHOOL	97
EVERYTHING FOR THE HOME AND OFFICE	103
EVERYTHING FOR TWO WHEELS	47
EVERYTHING FOR ALL TYPES OF INSTALLATION	52
ABSOLUTELY EVERYTHING FOR A WORLD OF COLOUR	30
A FRIEND FOR LIFE	84
A CONTINUOUS THREAD OF PASTA AND FANTASY	26
A DAY WORTH REMEMBERING	63
A DAY TO REMEMBER	61
A BOOK FOR A FRIEND	41
A WORLD OF FANTASY	98
A FABULOUS WORLD FOR THE YOUNG .. AND NOT SO YOUNG	40
A WORLD OF IDEAS	99
A RICH RANGE OF PRODUCTS AND MATERIALS	102
A FIRST-RATE CHOICE	79
A CHOICE OF STYLE	55
A SOLUTION FOR EVERY NEED	89
A VAST SELECTION OF PRODUCTS FOR YOUR HOME	71
A VAST RANGE OF PRODUCTS FOR YOU !	49
WORTH POINTS 1	68
WE WILL PUT YOU RIGHT	51

***DIRECTIVE 2002/96/EC ON THE TREATMENT, COLLECTION, RECYCLING
AND DISPOSAL OF ELECTRIC AND ELECTRONIC DEVICES AND THEIR
COMPONENTS***

1. FOR COUNTRIES IN THE EUROPEAN UNION (EU)

The disposal of electric and electronic devices as solid urban waste is strictly prohibited: it must be collected separately. The dumping of these devices at unequipped and unauthorized places may have hazardous effects on health and the environment. Offenders will be subjected to the penalties and measures laid down by the law.

TO DISPOSE OF OUR DEVICES CORRECTLY:

- a) Contact the Local Authorities, who will give you the practical information you need and the instructions for handling the waste correctly, for example: location and times of the waste collection centres, etc.
- b) When you purchase a new device of ours, give a used device similar to the one purchased to our dealer for disposal.



The crossed dustbin symbol on the device means that:

- When it to be disposed of, the device is to be taken to the equipped waste collection centres and is to be handled separately from urban waste;
- Olivetti guarantees the activation of the treatment, collection, recycling and disposal procedures in accordance with Directive 2002/96/EC (and subsequent amendments).

2. FOR OTHER COUNTRIES (NOT IN THE EU)

The treatment, collection, recycling and disposal of electric and electronic devices will be carried out in accordance with the laws in force in the country in question.

Code: 578215gb