


FENESTRA

244
242
144
142

DIRECT-INDIRECT

- Direct - ambient light distribution.
- Flush center basket design.
- T5, long twin tube and T8 lamping.
- Low glare direct-indirect illumination.
- Housings fit all ceiling types with ultra minimal exposed trim.
- Center slot detailing option available on the basket.
- Tannenbaum ribbed aluminum reflector option available.
- Air return and Chicago plenum options available.

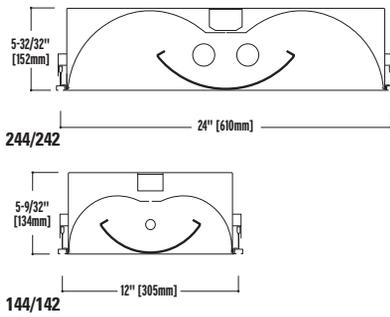

Construction

20-gauge steel housing.

Shielding

Perforated metal panels backed by a white acrylic diffuser.

Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish

Durable, low gloss, white, powder coated acrylic finish.

Mounting

Recessed.



Tannenbaum Reflector

ORDERING INFORMATION:

Sample number: 242R-2BX40W-STG-1EB-SI-EM

Series

142=1'x2' 144=1'x4' 242=2'x2' 244=2'x4'

Options²

A=Air Return T=Tannenbaum Reflector
C=Chicago Plenum

Mounting

R=Recessed

Number of Lamps (per cross section) (not included)

1=1 Lamp 2=2 Lamps 3=3 Lamps

Lamp Type¹

T8 T5 T5HO BX40W BX50W

Ceiling Type

ETG=Exposed T-Grid STG=Slot T-Grid (Sheet Metal)
SR=Sheet Rock (Flanged)

Voltage¹

1=120V 2=277V 3=347V U=Universal

Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast

Switching

SI=Single Switching DU=Dual Switching

Emergency


EM=Emergency Pack (Consult Factory)

Perforation


SP=Slotted SCS=Center Slots

1 Due to various constraints, some options may not be combined with others.
2 Can be left blank or more than one option may be available, consult factory.


STANDARD LUMINAIRE PLAN - VIEW - VIEW




242

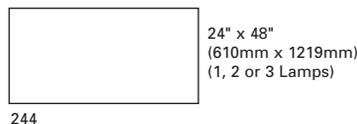

244




142




144


MOUNTING INFORMATION



ETG
STANDARD LAY-IN CEILING
(GRID LAY-IN)



STG
SCREW SLOT CEILING
(SLOT-T)



SR
SHEET ROCK CEILING
(FLANGE)

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.