

DESCRIPTION

A series of lampholders employing simple geometric shapes that create bold statements in any application. Toolless lockable tilt and rotation with graduations for precise, repeatable aiming. Three media capable, these 39W PAR30 metal halide lampholders are comfortable in applications from Gallery to Specialty Retail. Threaded screw-on bezel provides positive engagement, and removable beveled spacer creates an attractive look when multiple media are not required.

Ideal for accent and display lighting applications.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A ... Electrical Quick Lock Adapter Flexible Track - LF

Die Cast housing. Attaches electrically and mechanically anywhere along track.

B ... Electrical Quick Lock Adapter Power Trac - L

Die Cast housing. Attaches electrically and mechanically anywhere along track.

C ... Electrical Quick Lock Adapter Architectural Track - LA

Polycarbonate housing with integral fuse and on-off switch. Attaches electrically and mechanically anywhere along track.

D ... Yoke

Aluminum die cast yoke allows lampholder to rotate 330° and provides 0° to 90° vertical pivot for maximum aiming adjustability.

E ... Lockable Aiming

Lampholder tilt and rotation can be locked in place easily without the use of tools.

F ... Lampholder Body


Machined aluminum cylinders includes integral electronic ballast.

G ... Graduated Dials

Graduated dials for precise aiming of fixture.

Labels

UL/c-UL Listed for use with Halo Architectural Linear and Flexible Track, Halo Power-Trac, and Lazer. EMI/RFI complies with FCC 18C, non-consumer limits.

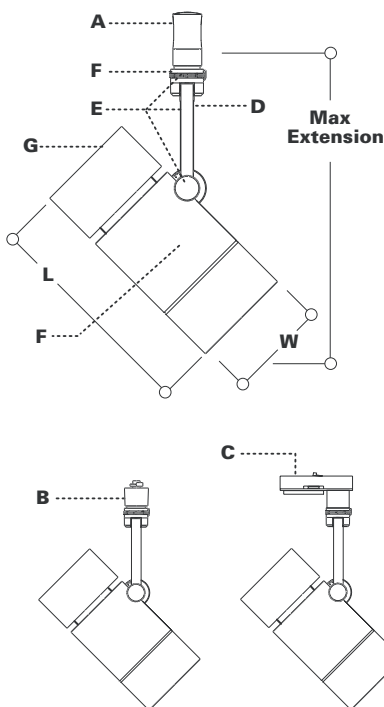

LF

L=10.5" [266mm]
W=5" [127mm]
Max Extension=
14.75" [374mm]

L

L=10.5" [266mm]
W=5" [127mm]
Max Extension=
15.25" [387mm]

LA

L=10.5" [266mm]
W=5" [127mm]
Max Extension=
15.3" [389mm]



LF5063039

L5063039

LA5063039

Synchro
39W PAR30
Metal Halide Accent

Flexible Track
Architectural Track
Power-Trac


39W Electronic Ballast

Power Factor: .95
Total Input Watts: 44
Max Amps: .39
THD:<15%

Track	2	06	30	39	Finish
LF=Flexible Track L=Halo Power-Trac LA=Halo Architectural Track	Lamp Type 5=Metal Halide	Series 06=Synchro	Lamp 30=PAR30	Wattage 39=39W	AH=Aluminum Haze P=White (L and LA only) MB=Black (L and LA only)

L200 Color Filters


L211=Medium Pink Color Filter
 L212=Warm Red Color Filter
 L214=Ultraviolet Filter
 L220=Daylight Blue Color Filter
 L221=Medium Blue Color Filter
 L231=Medium Amber Color Filter
 L241=Medium Green Color Filter



L200 Series Color Filters

L200 Series Optical Lenses



L210=Linear Spread Lens
 L210 lens fans out light beam 55° - 27 1/2° each side of center
 L215=Radial Spread Lens
 L215 lens spreads light beam 30° in all directions - 15° on all sides of center
 L250=Linear Spread Lens
 L250 lens spreads light beam in one direction
 L265=Prismatic Spread Lens
 L265 Spreads light beam in all directions

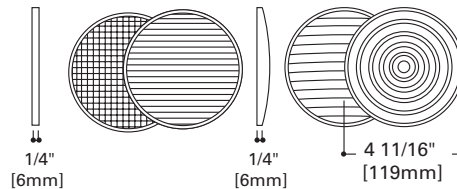

L200 Lenses

L275 Cube Cell Louver

4 3/4" OD (121mm). Black finish 1/2" cells for directing light and eliminating glare.

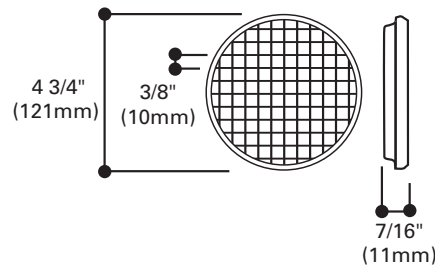

L275 Cube Louver

Remove beveled spacer when 2 or 3 media are used.