


Dimensions

Synchro PAR30 Metal Halide Lampholder

Length (L):	10.50" [266mm]
Width (W):	5.00" [127mm]
Max Extension:	
Halo Flexible Track	14.75" [374mm]
Halo Power-Trac	15.25" [387mm]
Halo Architectural Track	15.30" [389mm]

Description

Lamp:	39W, 70W PAR30
Finish:	Aluminum Haze (AH)
Accessories:	Accepts up to 3 media. L200 series lenses L275MB Cube Cell Louver L250 Linear Spread Lens L265 Prismatic Spread Lens

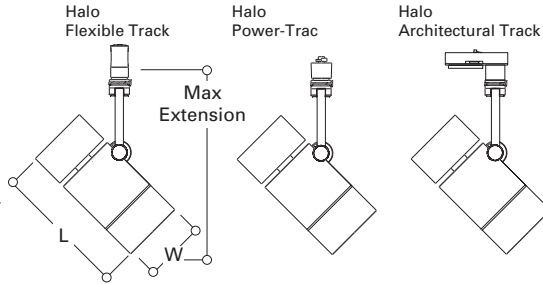


Dimensions

Synchro PAR38 Metal Halide Lampholder

Length (L):	13.12" [333mm]
Width (W):	5.50" [140mm]
Max Extension:	
Halo Flexible Track:	16.25" [412mm]
Halo Power-Trac:	17.00" [431mm]
Halo Architectural Track:	16.80" [426mm]

Description

Lamp:	70W PAR38 Metal Halide
Finish:	Aluminum Haze (AH)
Accessories:	Accepts up to 3 media L200 Series Lenses L275MB Cube Cell Louver L250 Linear Spread Lens L265 Prismatic Spread Lens

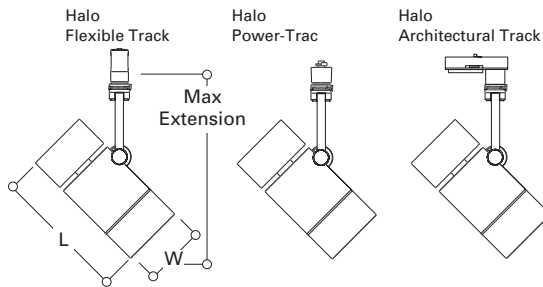

	5	06			
Track LF=Flexible Track L=Halo Power-Trac LA=Halo Architectural Track	Lamp Type 5=Metal Halide	Series 06=Synchro	Lamp 30=PAR30 38=PAR38	Wattage 39=39W (PAR30 only) 70=70W	Finish AH=Aluminum Haze P=White (L and LA only) MB=Black (L and LA only)

Electrical Quick Lock Adapter

Flexible Track Models:

Die Cast housing. Attaches electrically and mechanically anywhere along track.

Halo Power-Trac Models:

Polycarbonate housing. Attaches electrically and mechanically anywhere along track.

Halo Architectural Track Models:

Polycarbonate housing with integral fuse and on-off switch. Attaches electrically and mechanically anywhere along track.



SYNCHRO
PAR30 Metal halide



SYNCHRO
PAR38 metal halide

- Cylinder with rectangular cross section yoke, lockable tilt and rotation aiming and graduated aiming guides
- Aluminum die cast yoke allows lampholder to rotate 330° and provides 0° to 90° vertical pivot for maximum aiming adjustability.
- Lampholder tilt and rotation can be locked in place easily without the use of tools.
- Machined, Extruded and Die Cast Aluminum cylinders.
- Fixture provided with cover glass (required for use with lamps that are not rated for use with open fixtures).