

DESCRIPTION

A series of lampholders employing simple geometric shapes that create bold statements in any application. Tool less lockable tilt and rotation with graduations for precise, repeatable aiming. Three media capable, these 70W T6 metal halide lampholders are comfortable in applications from Gallery to Specialty Retail. Threaded screw-on bezel provides positive engagement, and removable beveled spacer creates an attractive look when multiple media are not required. Ideal for accent and display lighting applications.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A ... Electrical Quick Lock Adapter - Flexible Track

Die Cast housing. Attaches electrically and mechanically anywhere along Flexible Track. Includes integral electronic ballast.

B ... Electrical Quick Lock Adapter - Power Trac

Die cast housing. Attaches electrically and mechanically anywhere along Power trac. Includes integral electronic ballast.

C ... Electrical Quick Lock Adapter - Architectural Track

Polycarbonate housing with integral fuse and on-off switch. Attaches electrically and mechanically anywhere along Architectural Linear Track. Includes integral electronic ballast.

D ... Lampholder Body

Machined, Extruded and Die Cast Aluminum cylinders includes integral electronic ballast.

E ... Cover Glass

Fixture provided with cover glass (required for use with non-open fixture rated lamps).

F ... Lockable Aiming

Lampholder tilt and rotation can be locked in place without the use of tools.

G ... Graduated Dials

Graduated dials for precise and consistent aiming of fixtures.

Labels



UL/c-UL Listed for use with Halo Architectural Linear and Flexible Track, Halo Power-Trac, and Lazer. EMI/RFI complies with FCC 18C, non-consumer limits.



LF506670
L506670
LA506670

Synchro
70W T6 Metal Halide Accent

Flexible Track
Power-Trac
Architectural Track

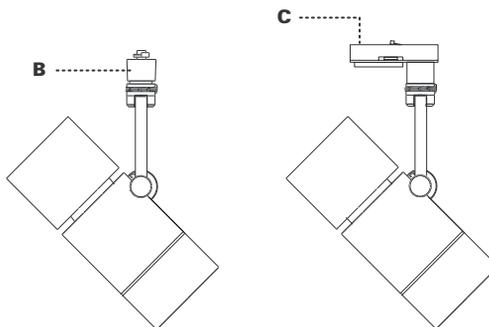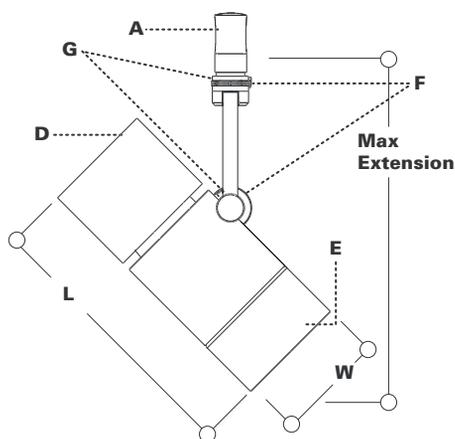

LF
L=13.12" [333mm]
W=5.5" [140mm]
Max Extension=
16.25" [333mm]

L
L=13.12" [333mm]
W=5.5" [140mm]
Max Extension=
16.25" [333mm]

LA
L=13.12" [333mm]
W=5.5" [140mm]
Max Extension=
16.25" [333mm]


70W Electronic Ballast
Power Factor: 0.95
Total Input Watts: 79
Max Amps: 0.67
THD:<15%

Track LF=Flexible Track L=Halo Power-Trac LA=Halo Architectural Track	5 Lamp Type 5=Metal Halide	06 Series 06=Synchro	Beam SP=Spot FL=Flood NF=Narrow Flood	6 Lamp 6=T6 Ceramic Metal halide	70 Wattage 70=70W	Finish AH=Aluminum Haze P=White (L and LA only) MB=Black (L and LA only)	Voltage LA only Blank=120V
---	--	--	--	--	---------------------------------------	--	---

• Product is only available in 120 volts.

L200 Color Filters


- L211=Medium Pink Color Filter
- L212=Warm Red Color Filter
- L214=Ultraviolet Filter
- L220=Daylight Blue Color Filter
- L221=Medium Blue Color Filter
- L231=Medium Amber Color Filter
- L241=Medium Green Color Filter



L200 Series Color Filters

L200 Series Optical Lenses



- L210=Linear Spread Lens**
L210 lens fans out light beam 55° - 27 1/2° each side of center
- L215=Radial Spread Lens**
L215 lens spreads light beam 30° in all directions - 15° on all sides of center
- L250=Linear Spread Lens**
L250 lens spreads light beam in one direction
- L265=Prismatic Spread Lens**
L265 Spreads light beam in all directions

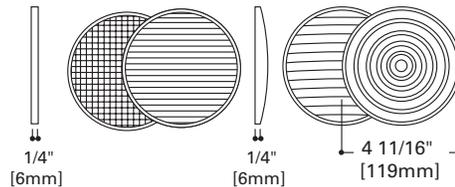

L200 Lenses

L275 Cube Cell Louver

4 3/4" OD (121mm). Black finish 1/2" cells for directing light and eliminating glare.

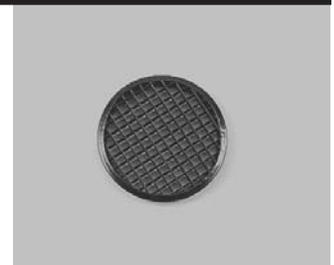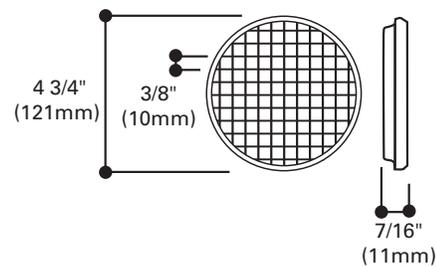

L275 Cube Louver

Remove beveled spacer when 2 or 3 media are used.