RECESSED PAR20 LV TRIMLESS

DESCRIPTION:

An adjustable PAR20 fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

3 - PAR20 lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. J-Box and wiring accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



Catalog


Туре

Project

COMBOLIGHT® LV Series

THREE (3) Light Recessed Next Generation Trimless Multi-Lamp Luminaire PAR20 Line Voltage

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
	26.75″	7.09″	21.00″	5.30″	11.05″	26.75″	13.25″	24.20" x 8.50"

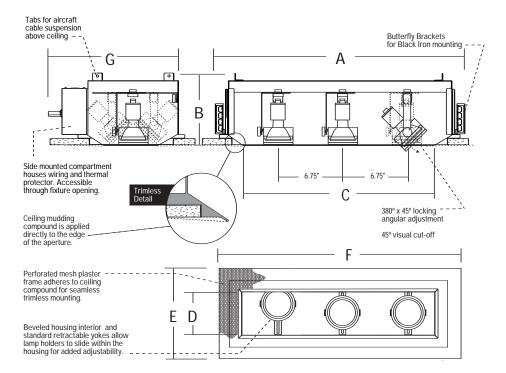



Optional Accessories - Details on Other Side

Other Adders CC - Two Circuit CP - Chicago Plenum

= Thi	ree Light Trimless Recessed PAR20 - White Interior		Baffle	Snoots	Louvers			
Cat. # / Description	Interior Finish							
LV2003IS: 3 Light Recessed Next Generation Trimless Combo Fixture 120V PAR20		BK - Black						
		WH - Whi	te					
		S - Silver	ŗ					
		PT - Custo	om (Specify)					
SPECIFY -	LV2003IS							

WH

ORDERING EXAMPLE: LV2003IS



