RECESSED PAR20MH

V TRIMLESS

DESCRIPTION:

An adjustable PAR20MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

4 - PAR20MH lamps mounted in adjustable bezels in a 2 x 2 square configuration. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.


SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Integral Aromat® electronic metal halide ballsts. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



Catalog #


Type

Project

COMBOLIGHT® LV Series

FOUR (4) Light Square Recessed Next Generation Trimless Multi-Lamp Luminaire **PAR20 Metal Halide**

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
	19.75"	7.09"	14.00"	14.00"	19.75"	19.75"	21.95"	17.20" x 17.20"

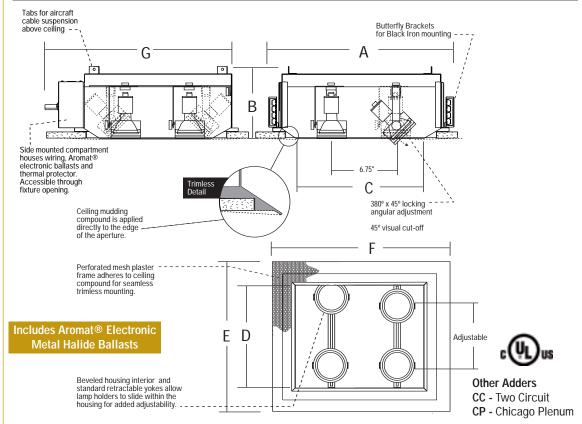

ORDERING EXAMPLE: LV240MHSQ WH 120 = Four Light Square Trimless Recessed PAR20MH - White Interior - 39 watt lamps - 120 Volt

Optional Accessories - Details on Other Side						
@	⊗ ⊝					
Baffle	Snoots	Louvers	Lenses			

Cat. # / Description		Interior Finish	Lamp Wattage	Voltage
LV240MHSQ: 4 Light Square Recessed Next Generation Trimless Combo Fixture PAR20MH		BK - Black	39 - 39 Watt PAR20MH	120 - 120 Volt (Standard)
		WH - White		277 - 277 Volt
		S - Silver		
		PT - Custom (Specify)		
PECIFY-	LV240MHSQ			



