


## **DIMENSIONS**



## **DESCRIPTION**

The Generation Series Avenue provides updated styling and a smooth exterior appearance, providing a contemporary feel to any setting. Refractive globe provides superior photometrics, maximum pole spacing, excellent roadway illumination and uniformity.

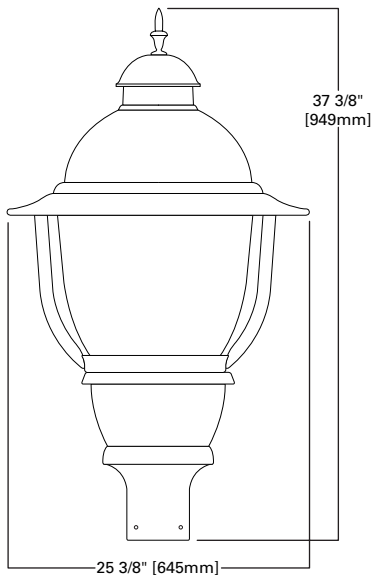

## **GAT AVENUE POST TOP**

**50 - 400 W**

Metal Halide  
High Pressure Sodium  
Electrodeless  
Fluorescent

## **DECORATIVE LUMINAIRE**

- All hard mount tops are made of spun aluminum. Top provided with toolless access for ease of maintenance. Finials are cast aluminum
- Globe is available in 9" high efficiency acrylic or optional polycarbonate refractive design. Internal and external prisms work in conjunction to provide excellent vertical and horizontal illumination
- Two (2) uprights are manufactured of cast aluminum. Banding is spun aluminum. All cage assemblies are mounted to the exterior of the housing via four (4) allen head stainless steel fasteners
- Ballast assembly is mounted on a removable tray with quick disconnects for ease of installation and maintenance
- Optional NEMA PCR is provided with quick disconnects for ease of maintenance
- Post top mount fits 3" O.D. tenons. Four (4) stainless steel fasteners standard
- Approximate net weight: 50 lbs. (23 kgs.)

## **ORDERING INFORMATION**

**SAMPLE NUMBER:** GAT-150-MH-120-33-UUA-BZ

| Product Family    | Lamp Wattage   | Lamp Type   | Voltage <sup>5</sup>  | Refractor Type           | Top Type <sup>8</sup> | Cage Type <sup>9</sup>  | Color <sup>9</sup>  | Options & Accessories |
|-------------------|--|---|---|--------------------------|-----------------------|---|---|-----------------------|
| GAT=Architectural | 50=50W<br>70=70W<br>85=85W <sup>1</sup><br>100=100W<br>150=150W<br>175=175W<br>250=250W<br>400=400W <sup>2,3</sup> | MH=Metal Halide <sup>4</sup><br>HPS=High Pressure Sodium<br>QL=Electrodeless Fluorescent <sup>1</sup> | 120=120V<br>208=208V<br>240=240V<br>277=277V<br>347=347V<br>480=480V<br>MT=Multi-Tap <sup>6</sup><br>TT=Triple-Tap <sup>7</sup> | 33=Type III<br>55=Type V | U=Avenue              | U=Avenue<br>X=None<br><br>Finial Type <sup>9</sup><br>A=Architectural<br>M=Modern | AP=Grey<br>BZ=Bronze<br>BK=Black<br>GN=Hartford Green<br>WH=White<br>DP=Dark Platinum<br>GM=Graphite Metallic | (See Below)           |

**E.P.A. 2.1**

## **Options<sup>10</sup>**

F=Single Fuse (120, 277 or 347V)  
FF=Double Fuse (208, 240 or 480V)  
P=Polycarbonate Refractor<sup>11</sup>  
R=Internal NEMA photocontrol Receptacle  
D=Downlight Reflector  
L=Lamp Included

## **Accessories<sup>12</sup>**

AA2000=House Side Shield—Mogul-Base Lamp  
AA2001=House Side Shield—Medium-Base Lamp  
OA/RA1016=NEMA Twistlock Photocontrol—Multi-Tap  
OA/RA1027=NEMA Twistlock Photocontrol—480V  
OA1201=NEMA Twistlock Photocontrol—347V

**NOTES:** 1 85W QL Electrodeless Fluorescent only. 120 or 240V only. 2 Not available in 480V. 3 400W available in Metal Halide only. Requires reduced envelope ED-28 lamp. 4 Medium-base lamps standard for 150W and below Metal Halide. 5 Product also available in non-US voltages and 50Hz for international markets. Consult factory for availability and ordering information. 6 Multi-Tap ballast is 120/208/240/277V wired 277V. 7 Triple-Tap ballast is 120/277/347V wired 347V. 8 Avenue Cage must be ordered with Avenue Top and Architectural Finial. Top is available without Avenue Cage. 9 Other finish colors available, including a full line of RAL color matches. Consult your Cooper Lighting Representative. 10 Add as suffix in the order shown. 11 Polycarbonate parts used with Metal Halide lamps will eventually yellow. 12 Order separately, replace XX with color suffix. 13 Specifications and dimensions subject to change without notice.