


## DIMENSIONS

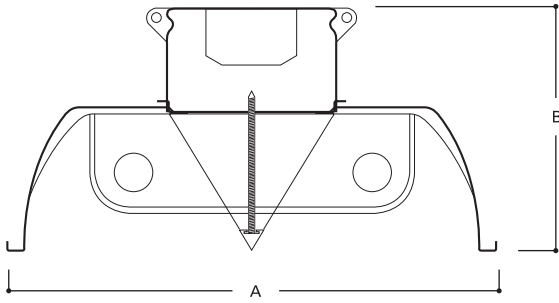

NOMINAL LENGTH	A	B
4', 8'	13 1/2" (343mm)	6 5/8" (168mm)

## DESCRIPTION

The DIVM Series is an energy efficient family of industrials that features premium performance and durability. The DIVM incorporates heavy duty, embossed, reflectors that precisely direct and effectively control light. The special deep center "V" reflector provides 30° crosswise lamp shielding to minimize glare. The versatile DIVM can be installed using various mounting methods and numerous options and accessories are available. The DIVM Series can be utilized in simple task and area lighting to the most demanding industrial applications.



## DIVM SERIES

4' or 8' Industrial  
2 Lamps

HEAVY DUTY  
CENTER "V" INDUSTRIAL

## ORDERING INFORMATION

SAMPLE NUMBER: DIVM-232-120V-EB81-U

Tandem	Number of Lamps	Options	Packaging
Blank=4' Length 8T=8' Length	2 Lamps (Not included)	(See Options Section)	U=Unit Pack 4B=4 Bulk
Series DIVM=Apertured Reflector DCIVM=Closed Top Reflector	Wattage (Length) 40=34/40W T12 (48") 32=32W T8 (48") 48=40W T12 (48") SL 48HO=60W T12 (48") HO 48HO=44W T8 (48") HO 48VHO=110W (48") VHO 96=60/75W T12 (72") SL 96=59W T8 (96") SL 96HO=95/110W T12 (96") HO 96HO=86W T8 (96") HO 96VHO=185/215W (96") VHO 96PG=185/215W (96") PG	Ballast Type <sup>(1)</sup> Blank=Standard Magnetic Ballast LE3=T12 Magnetic Energy Saving EB8 = T8 Electronic Instant Start. Total Harmonic Distortion < 10% No. of Ballast 1, 2 or 3 EB8 /PLUS= T8 Electronic Instant Start. High Ballast Factor >1.13. Total Harmonic Distortion < 20% No. of Ballast 1, 2 or 3 ER8 = T8 Electronic Program Rapid Start. Total Harmonic Distortion < 10% No. of Ballast 1, 2 or 3 EB2 =T12 Electronic Rapid Start. No. of Ballast 1 or 2 (For complete details on generic or to specify manufacturer's ballast see pg. 469)	
	Voltage <sup>(1)</sup> 120V=120 Volt 277V=277 Volt 347V=347 Volt UNV=Universal Voltage 120-277 <sup>(2)</sup>		
	Options GL=Single Element Fuse GM=Double Element Fuse Emergency - for EM installed, see EM options table		

- Equipped with energy saving ballasts/complies with federal energy efficiency standards
- Die formed channels
- Heavy duty apertured, (DIVM) or closed top, (DCIVM) reflector with Center "V"
- Deep draw full width reflector ribs add rigidity
- Center "V" provides 30° crosswise shielding/ reduces glare
- Metal clad lampholders with spring loaded sockets
- Baked white enamel finish
- Apertured reflector (DIVM) standard with 20% uplight
- Porlux and Silverlining finishes available <sup>(3)</sup>
- Wire guards, gym guards, lens frames, and metal louvers available for special applications
- Also available in tandem 8' lengths
- UL/CUL Listed. Suitable for damp locations.

NOTES: <sup>(1)</sup> Products also available in non-US voltages and frequencies for international markets. <sup>(2)</sup> Not available when specifying emergencies, voltage must be specific. <sup>(3)</sup> Silver lining not available on fixtures with HO, VHO or PG.