

COOPER LIGHTING - METALUX®



G SERIES

1' x 4', 2' x 2', 2' x 4'
Troffer
2, 3 or 4 Lamp


LOW PROFILE
COMMERCIAL GRADE
RECESSED T12 STATIC
TROFFER

- Equipped with energy saving ballasts/complies with federal energy efficiency standards
- Reinforced flat white steel door, mitered corners
- Spring loaded latch
- Full length mechanical light trap and positive end light seal
- T-hinges
- One piece die embossed housing
- Unibody housing/end plates with mechanically weld secured
- Four auxiliary fixture end suspension points provided
- End plate grid-lock feature
- For drywall applications, field install flange kit available. See Technical Section for detail.
- UL/CUL Listed. Suitable for damp locations.

DESCRIPTION

The G Series features a nominal 3-3/4" deep low profile fixture housing with a premium finish for optimum performance. The series also features recessed aesthetics and the latest in energy efficient technology. Luminaires are compatible with today's popular ceiling systems and are available with a number of options and accessories for application versatility. The G Series features efficiency, quality, performance and economy in a low profile luminaire. The G Series is an excellent choice for commercial office spaces, schools, hospitals or retail merchandising areas.


DIMENSIONS

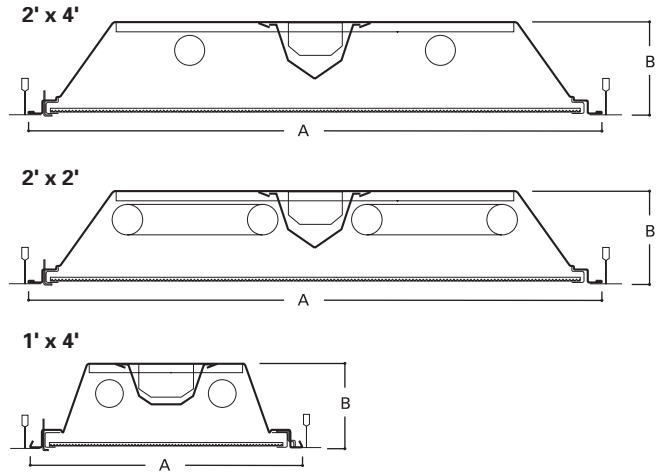

NOMINAL SIZE	A	B
1' x 4'	11-3/4" (298mm)	3-3/4" (95mm)
2' x 2'	23-3/4" (603mm)	3-3/4" (95mm)
2' x 4'	23-3/4" (603mm)	3-3/4" (95mm)

ORDERING INFORMATION

SAMPLE NUMBER: 2G-240A-120V-LE3-U

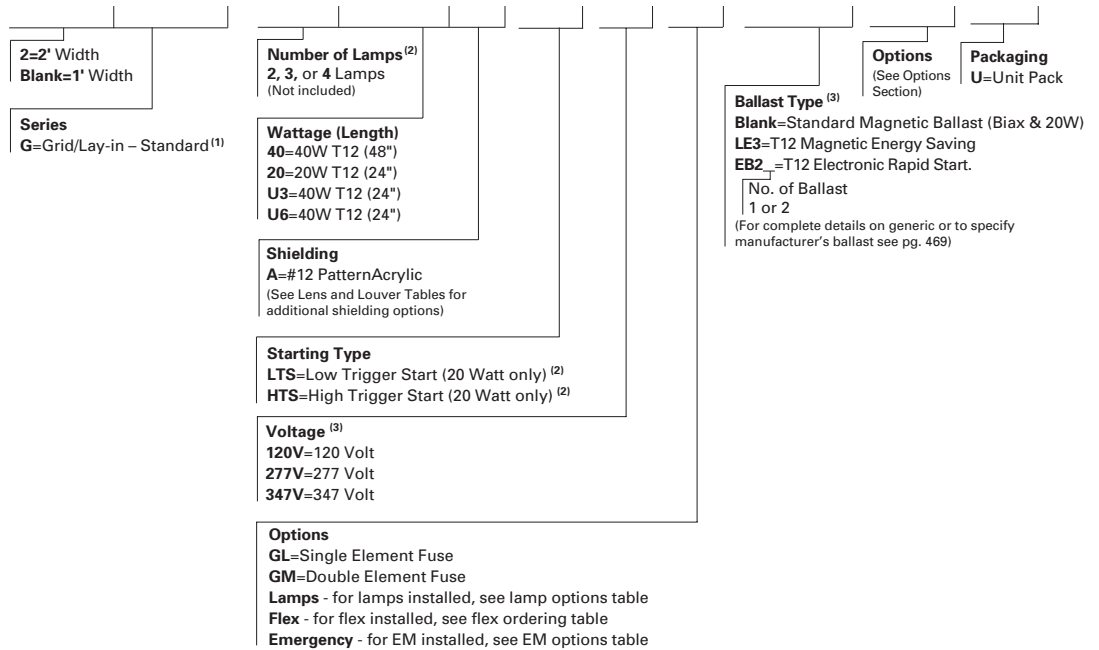

NOTES: ⁽¹⁾An EQ Grid Clip is recommended for all 9/16" ceiling systems. ⁽²⁾Standard off-center ballast compartment on 3-lamp fixtures. ⁽³⁾Products also available in non-US voltages and frequencies for international markets.

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Cooper Lighting Representative for availability and ordering information.