

COOPER LIGHTING - METALUX®



M/MC SERIES

1' x 4', 2' x 2', 2' x 4'
Surface
2, 3 or 4 Lamps


SURFACE MODULAR

- Equipped with energy saving ballast/complies with federal energy efficiency standards
- Low profile/modular look
- Die formed housing
- Surface or stem mounting, single or continuous row ^{(4) (6)}
- End and side panels secured with interlocking tabs
- Full seam welded corners ⁽⁵⁾
- Dihedral recessed top design for cooler operation
- Reinforced, quadra-sealed flat white steel door, mitered corners
- Spring loaded Cam latch/T hinge
- UL/CUL Listed. Suitable for damp locations.

DESCRIPTION

The M/MC Series combines a low profile, surface modular design with the latest in energy-efficient technology. The dihedral recessed top design allows for cooler fixture operation. Other features include a die-formed housing, surface or stem mounting (single or continuous row), full seam-welded corners and a broad selection of attractive door frames. The versatile modular M Series can be the perfect solution when used in applications such as commercial office spaces, schools, hospitals, and retail merchandising areas.


DIMENSIONS

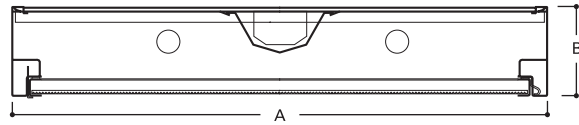

NOMINAL SIZE	A	B
1' x 4'	12" (305mm)	3-15/16" (101mm)
2' x 2'	24" (610mm)	3-15/16" (101mm)
2' x 4'	24" (610mm)	3-15/16" (101mm)

ORDERING INFORMATION

SAMPLE NUMBER: 2M-232A-120V-EB81-U

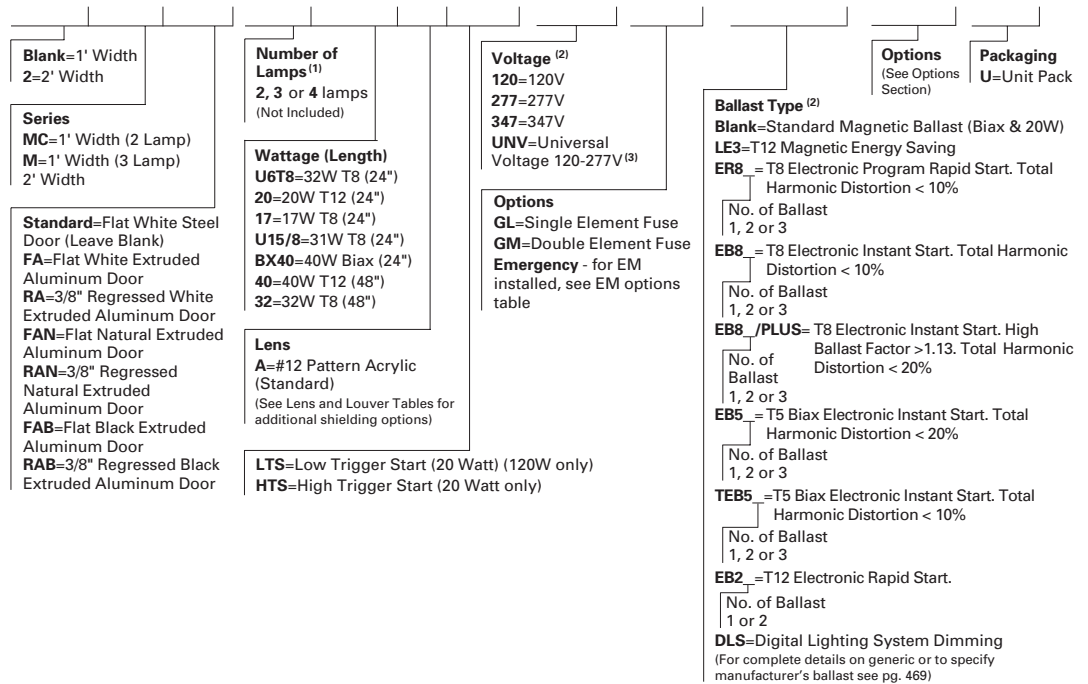

NOTES: ⁽¹⁾ 1' x 4' 3-lamp, 2' x 4' 3-lamp have side mounted ballasts covers. ⁽²⁾ Products also available in non-US voltages and frequencies for international markets. ⁽³⁾ Not available when specifying emergencies, voltage must be specific. ⁽⁴⁾ 2' x 2', 2' x 4' require 4-point suspension, side mounted ballast recommended. ⁽⁵⁾ 1' x 4', 2' x 2', 2' x 4' fixtures. ⁽⁶⁾ For continuous row mounting 7/8" KOs furnished in end of fixture, specify EKO.