



DIMENSIONS ⁽²⁾


Square Profile Wraparound

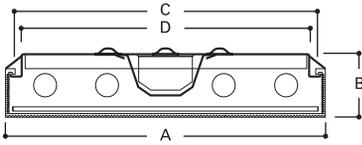

Acrylic End Wraparound

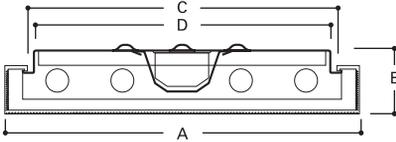

Home Wraparound

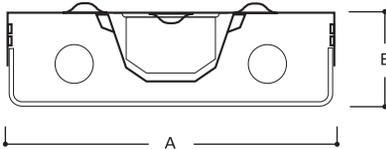

DESCRIPTION	A	B	C	D
SQUARE PROFILE				
2 Lamp	8 1/2" (216mm)	2 5/8" (67mm)	8 1/4" (210mm)	7 1/4" (184mm)
4 Lamp	14" (356mm)	2 5/8" (67mm)	13 3/4" (349mm)	12 3/4" (324mm)
ACRYLIC END				
2 Lamp	9 7/8" (251mm)	2 5/8" (67mm)	8 1/4" (210mm)	7 1/4" (184mm)
4 Lamp	15 3/8" (391mm)	2 5/8" (67mm)	13 3/4" (349mm)	12 3/4" (324mm)
HOME WRAPAROUND				
2 Lamp	7 1/2" (191mm)	2 5/8" (67mm)		

DESCRIPTION

SQUARE PROFILE

The Square Profile Wraparound Series features economy and energy efficient performance. The luminaire's characteristic clean, low profile design is both appealing and practically functional. The series utilizes a clear, low brightness, extruded acrylic refractor and a heavy gauge steel end plate with embossed light seal for dependable performance and good looks. The efficient and economical series is the perfect wraparound for kitchens, laundry rooms, basements, workshops and other areas.

ACRYLIC ENDS

The Acrylic End Wraparound Series is a specification wraparound luminaire featuring energy efficient performance. The luminaire's characteristic clean, low profile design is both appealing and practically functional. The series utilizes a clear, low brightness, extruded acrylic refractor with injection molded end caps for high performance and good looks. The efficient and stylish series is the perfect wraparound for kitchens, laundry rooms, basements, workshops and other areas.

HOME WRAPAROUND

The Home Wraparound features value and energy efficient performance. The luminaire's characteristic clean, low profile design is appealing and functional. The Home Wraparound utilizes a clear, low brightness, extruded acrylic refractor and injection molded end caps for dependable performance and good looks.



WRAPAROUND SERIES

2' or 4' Surface
2 or 4 Lamps

SURFACE WRAPAROUND

- Uses two or four fluorescent lamps (not included)
- Low profile
- Low brightness/extruded acrylic refractor
- Baked white enamel finish
- Ballast pads for cooler operation
- Lift and shift refractor for ease of re-lamping
- Suitable for damp locations
- UL/CUL Listed

ORDERING INFORMATION ⁽⁴⁾

Catalog Number ^(1, 5)	Description	Shipping Wt.
WRAPAROUNDS SQUARE PROFILE		
2122	2 lamp 24", 20W T12, Acrylic Diffuser	6 lbs. (2.7kg)
2324	2 lamp 48", 40W T12, Acrylic Diffuser	13 lbs. (5.9kg)
2324E	2 lamp 48", 40W T12, Acrylic Diffuser	14 lbs. (6.3kg)
2324-REB1	2 lamp 48", 32W T8, Acrylic Diffuser	14 lbs. (6.3kg)
2444	4 lamp 48", 40W T12, Acrylic Diffuser	20 lbs. (9kg)
2444E	4 lamp 48", 40W T12, Acrylic Diffuser	23 lbs. (10.4kg)
2444-REB1	4 lamp 48", 32W T8, Acrylic Diffuser	23 lbs. (10.4kg)
WRAPAROUNDS ACRYLIC ENDS		
2522	2 lamp 24", 20W T12, Acrylic Diffuser	6 lbs. (2.7kg)
2724	2 lamp 48", 40W T12, Acrylic Diffuser	13 lbs. (5.9kg)
2724E	2 lamp 48", 40W T12, Acrylic Diffuser	15 lbs. (7.2kg)
2642	4 lamp 24", 20W T12, Acrylic Diffuser	12 lbs. (5.4kg)
2844	4 lamp 48", 40W T12, Acrylic Diffuser	20 lbs. (9kg)
2844E	4 lamp 48", 40W T12, Acrylic Diffuser	20 lbs. (9kg)
HOME WRAPAROUND		
2004	2 lamp 48", 40W T12, Acrylic Diffuser	11 lbs. (4.9kg)
2004E	2 lamp 48", 40W T12, Acrylic Diffuser (with Commercial Grade Energy Saving Ballast)	12 lbs. (5.4kg)
2004-REB1	2 lamp 48", 32W T8, Acrylic Diffuser	12 lbs. (5.4kg)

NOTES: ⁽¹⁾ For complete product data, reference the Fluorescent Specification binder. ⁽²⁾ Specifications & dimensions subject to change without notice. ⁽³⁾ "E" in catalog number means Electronic Ballast that operates T12 lamps. ⁽⁴⁾ Consult your Cooper Lighting Representative for availability and ordering information. ⁽⁵⁾ REB1 available on a "made to order" basis.