

DESCRIPTION

New construction housing for Mini Quiet Ceiling small aperture square trimless fixtures (QCM5101, QCM5102, QCM5103, QCM5104).

For new construction non-I.C. applications. Insulation must be kept 3" from all sides and at least 1" above the housing.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A ...Housing

Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable trimless mud-ring can accommodate 1/2", 5/8", 3/4" & 1" ceiling thickness.

B ...System Protection:

Thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation.

C ...Electrical

Integral j-box and metal halide ballast. 120V input. Junction box is U.L. listed for through branch wiring. Includes five 1/2 trade size knockouts.


D ...Lamp

CMH MR16 20W or ES16 BriteSpot 39W (not included). Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. GX10 twist-lock lamp socket.

E ...Mounting

Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively. Perforated flaps for secure drywall installation.


Ceiling Cut-Out: 5.50" sq.



MINI QUIET CEILING TRIMLESS

QCM510MH New Construction Housing for Square Trim

FOR CMH MR16 20W
or ES16 BriteSpot 39W

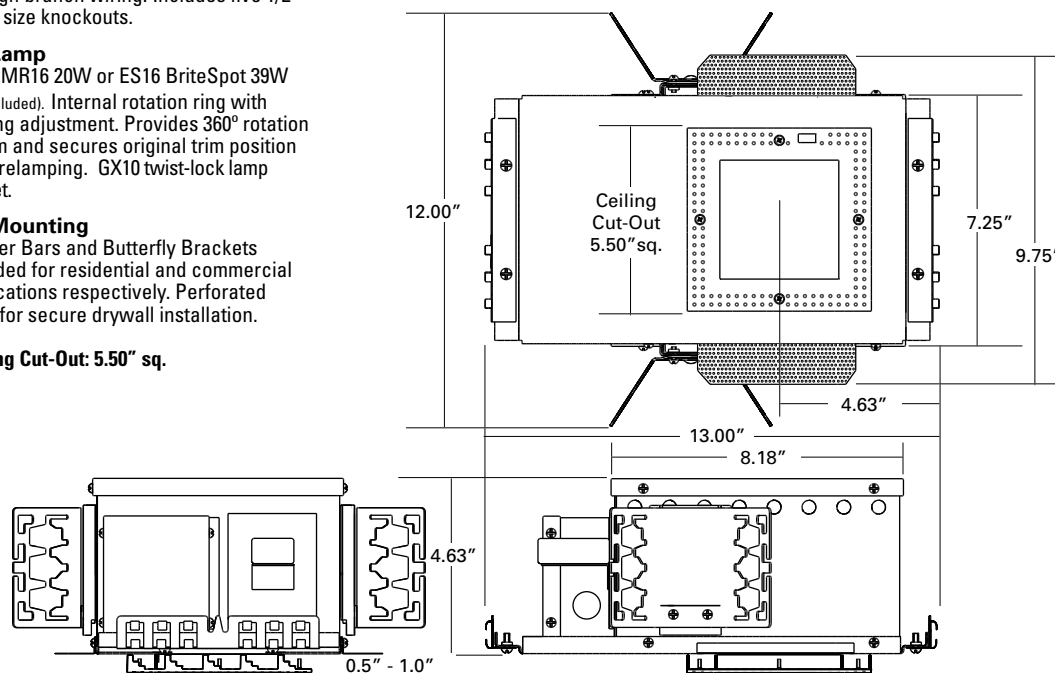

ORDERING INFORMATION

QCM510MH		
Housing QCM510MH = Mini Quiet Ceiling New Construction Housing for Square Trim w/Integral Ballast	Metal Halide Ballast 20 = CMH MR16 20W 39 = ES16 BriteSpot 39W	Voltage 120 = 120 volts primary 277 = 277 volts primary* *Consult factory for 277V ballast availability.