


## VICEORY 501-IW

DIRECT-INDIRECT

- Semi-indirect light distribution.
- Minimalist fixture profile – 6.75" wide by 2.25" high.
- Optimized T5 optics for wide light distribution and good efficiency.
- Die formed perforated steel housing.
- Modular lengths – 4' and 8' for individual or continuous runs.
- Precision die cast end caps.

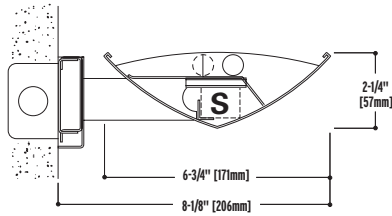

### Construction

20-gauge steel housing with staggered round hole pattern backed by white acrylic diffuser. Nominal 4' or 8' illuminated sections.

### End Caps

Precision die-cast aluminum.

### Reflector

Formed semi-specular anodized aluminum.

### Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

### Finish

Baked on low gloss white powder coated acrylic.

### Mounting

Wall mounted.

### ORDERING INFORMATION:

Sample number: 501IW-2T5-20-1EB-SI-RP

#### Series

501=Viceroy

#### Light Output

I=Indirect

#### Mounting

W=Wall

#### Number of Lamps (not included)

1=1 Lamp 2=2 Lamps

#### Lamp Type

T5 T5HO

#### Run Length

Overall Nominal Run Length\_\_ft.

#### Voltage <sup>1</sup>

1=120V 2=277V 3=347V U=Universal

#### Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast  
[Only slim line ballast (small case)]

#### Switching

SI=Single Switching DU=Dual Switching (2 Lamps)

#### Perforation

RP=Round BP=None SP=Slotted

#### Emergency

EM=Emergency Pack (Consult Factory)


#### Fusing

GLR GMF

<sup>1</sup> Due to various constraints, some options may not be combined with others.


**S** = Slim Line Ballast only.

### STANDARD LUMINAIRE LENGTHS




### MODULAR ROW CONFIGURATION

- Standard length sections join easily to create rows.
- Sections align with T-grid.
- All sections prewired for through-wiring with quick connectors.



### END CAP



NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.