

## NEO-RAY™



## EUROPA 16-DIW 16-IW

SEMI INDIRECT  
DIRECT-INDIRECT

Europa 16-DIW features



- Indirect - direct light distribution.
- T5, Twin tube and T8 lamping options.
- Three distinct light distributions - direct, indirect and indirect/direct.
- Die formed steel perforated housings.
- Nominal 3' & 4' long illuminated sections.
- Optional slotted perforated pattern.
- Precision die cast end caps.
- **1" Articulated joiners between sections.**

Europa 16-IW features

- Semi - indirect light distribution
- T5 and T8 lamping options.



16-IW

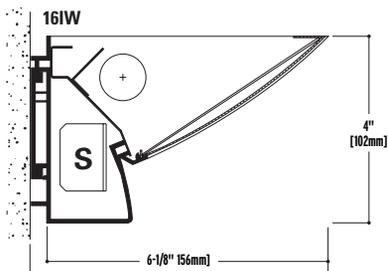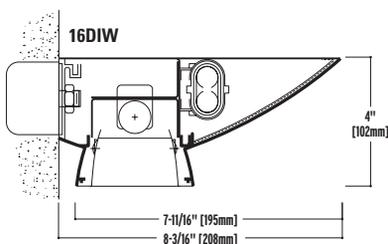

### Construction

Extruded aluminum housing, 20-gauge steel front shield with staggered rounded hole pattern backed by white acrylic diffuser. Nominal 3' or 4' illuminated sections.

### End Caps

Die-cast aluminum.

### Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

### Finish

Durable, low gloss, white, powder coated acrylic finish.

### Mounting

Wall mounted.

**S** = Slim Line Ballast only.

### ORDERING INFORMATION:

Sample number: 16IW-1T5-56-2EB-SI-RP

### Series

16=Europa

### Light Output

I=Indirect DI=Direct/Indirect

### Mounting

W=Wall

### Number of Lamps (per cross section) (not included)

1=1 Lamp 2=2 Lamps (16DIW only)

### Lamp Type

T8 T5 BX40 (for 16DIW, upright only) T5H0

### Run Length

Overall Nominal Run Length\_\_ft. (Any combination of 8', 6', 4' and 3' sections)

### Voltage <sup>1</sup>

1=120V 2=277V 3=347V U=Universal

### Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast

### Switching

SI=Single Switching DU=Dual Switching (2 Lamps)

### Perforation

RP=Round BP=None SP=Slotted

### Emergency


EM=Emergency Pack (Consult Factory)

### Fusing


GLR GMF

<sup>1</sup> Due to various constraints, some options may not be combined with others.

### MOUNTING INFORMATION



### MOUNTING HOLE PATTERN

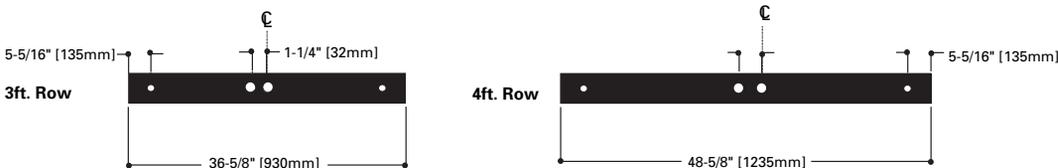

### MOUNTING HOLE LEGEND

- 7/8" DIAMETER K.O.
- 3/8" DIAMETER MOUNTING HOLES

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.