



NEO-RAY™



FENESTRA 254 252 154 152

SEMI INDIRECT
DIRECT-INDIRECT

- Ambient light distribution.
- Narrow 4" diam. drop center basket design.
- Optimized for T5 lamping.
- Low direct glare illumination.
- High fixture efficiencies, range from 70% to 80%.
- Housings fit all ceiling types with ultra minimal exposed trim.
- Tannenbaum ribbed aluminum reflector option available.
- Air return and Chicago plenum options available.

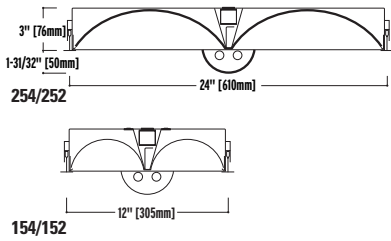


Construction
20-gauge steel housing.

Shielding
Perforated metal panels backed by a white acrylic diffuser.

Electrical
120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish
Durable, low gloss, white, powder coated acrylic finish.

Mounting
Recessed.



Tannenbaum Reflector

ORDERING INFORMATION:

Sample number: 252R-2T5-ETG-1EB-SI-EM

Series
152=1'x2' 154=1'x4' 252=2'x2' 254=2'x4'

Options²
A=Air Return T=Tannenbaum Reflector
C=Chicago Plenum

Mounting
R=Recessed

Number of Lamps (per cross section) (not included)
1=1 Lamp 2=2 Lamps (T5 only available with 2 lamps)

Lamp Type
T5 T5HO BX40W BX50W

Ceiling Type
ETG=Exposed T-Grid STG=Slot T-Grid
SR=Sheet Rock (Flanged)

Voltage¹
1=120V 2=277V 3=347V U=Universal


Ballast
EB=Electronic Ballast (Standard) DB=Dimming Ballast

Switching
SI=Single Switching DU=Dual Switching


Emergency
EM=Emergency Pack (Consult Factory)

¹ Due to various constraints, some options may not be combined with others.
² Can be left blank or more than one option may be available, consult factory.

STANDARD LUMINAIRE PLAN - VIEW - VIEW

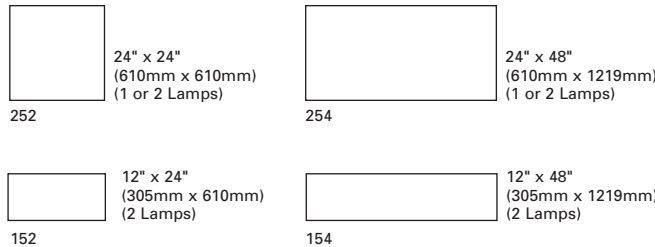

MOUNTING INFORMATION

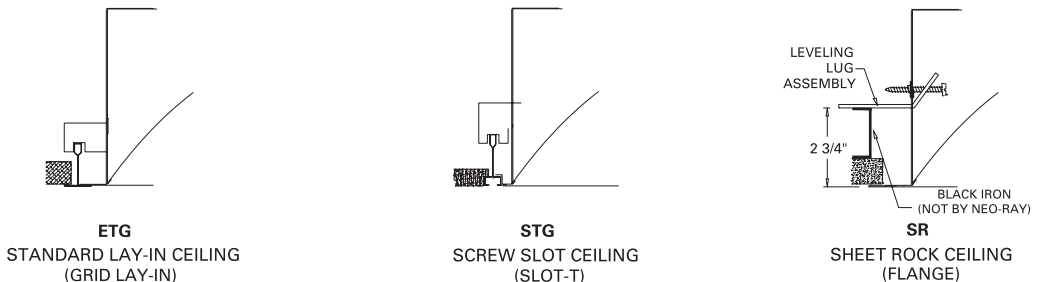

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.