

ORDERING INFORMATION:
Sample number: 790S-1T8-4-1EB-SI

Series
790S

Number of Lamps (not included)
1=1 Lamp

Lamp Type
T8 T5

Run Length
Overall Nominal Run Length__ft. (Any combination of 8', 6', 4' and 3' sections)

Voltage¹
1=120V 2=277V 3=347V U=Universal

Ballast
EB=Electronic Ballast (Standard) DB=Dimming Ballast

Switching
SI=Single Switching

Emergency
EM=Emergency Pack (Consult Factory)

Fusing
GLR GMF

¹ Due to various constraints, some options may not be combined with others.

Construction

20-gauge steel housing.

Electrical


120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish

Durable, low gloss, white, powder coated acrylic finish.

Mounting

Recessed.




79-OS

INDIRECT

- Direct wall wash light distribution.
- T5 and T8 lamping.
- Softly graduated wall illumination without lamp socket shadows.
- Factory prepared inside and outside mitered corners, create a refined finished detail at the ceiling line.
- Lamps shielded from all viewing angles.
- Die formed steel housing.
- Runs are field adjustable.
- Illuminated wall continues above the ceiling line to create floating ceiling effect.
- 90 degree mitered corners.
- Contractor friendly installation.

RUNS AND PATTERNS

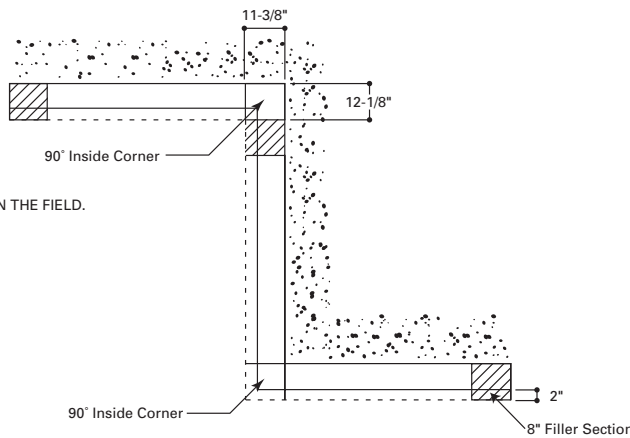

PATTERNS ARE PROVIDED WITH CORNER SECTIONS. FIELD DIMENSIONS ARE REQUIRED. FILLER SECTIONS ARE CUT TO LENGTH IN THE FIELD.

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.