



# NEO-RAY™



## 81

### DIRECT

- Direct light distribution.
- T5 and T8 lamping.
- Die formed steel housing, nominal illuminated sections 3' and 4'.
- Rigid 'U' shaped trim is double formed with 3/8" regress soft lit edge.
- For individual fixtures mounted in ETG Ceilings in 3' or 4' sections.
- For runs see Series 82 fixture (page 757).

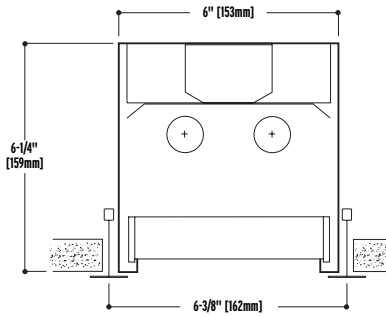

### Construction

20-gauge steel housing. Nominal 3' or 4' illuminated sections.

### Shielding

Acrylic diffuser or lens, parabolic or bold baffle shielding.

### Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

### Finish

Durable, low gloss, white, powder coated acrylic finish.

### Mounting

Recessed.

### ORDERING INFORMATION:

Sample number: 81R-2T5H0-ETG-2EB-SI-S72

### Series

81 (ETG-Exposed "T" grid ceiling only)

### Mounting

R=Recessed

### Number of Lamps (not included)

1=1 Lamp      2=2 Lamps

### Lamp Type (Length)

T8      T5      T5H0

### Ceiling Type

ETG=Exposed T-Grid (81)

### Length

3' or 4' individuals only

### Voltage <sup>1</sup>

1=120V      2=277V      3=347V      U=Universal

### Ballast

EB=Electronic Ballast (Standard)      DB=Dimming Ballast

### Switching

SI=Single Switching      DU=Dual Switching

### Emergency

EM=Emergency Pack (Consult Factory)

### Fusing

GLR      GMF

### Shielding

S22=White Acrylic Diffuser with Mullion

S58=KSH-12 Clear Acrylic Prismatic Lens with Mullion

S72=White Bold Baffle


S79=Semi-Specular Aluminum Parabolic Baffle

1 Due to various constraints, some options may not be combined with others.  
2 Can be left blank or more than one option may be available, consult factory.

### SHIELDING OPTIONS




S22 Acrylic Diffuser



S58 Acrylic Lens



S72 Bold Baffle



S79 Parabolic Baffle

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.