


# NEO-RAY™



## OMNI 93-DIP

### DIRECT-INDIRECT

- High efficiency 50/ 50 light distribution.
- Wide direct and indirect light distribution for 1.8 to 1 spacing to mounting ratio.
- Parabolic louver designed for continuous unbroken appearance.
- Satin low glare louver finish.
- Die formed steel housing, nominal lengths – 3', 4', 6' and 8'.

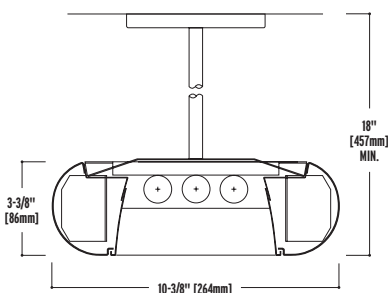

**Construction:** Formed 20-gauge cold rolled steel with internal structural bracing. Nominal 3', 4', 6' or 8' illuminated sections.

**Shielding:** Pearlescent parabolic baffle.

**Electrical:** 120, 277, 347 or Universal Voltage electronic ballast. Luminaires and electrical components certified to UL and CUL standards.

**Finish:** Durable, low gloss, white, powder coated acrylic finish.

**Mounting:** Pendant: Single stem (standard); single cable; single swivel stem (EQ). Canopy: 5" diameter cover (standard).

### ORDERING INFORMATION:

Sample number: 93-DIP-2T8-ST56-1EB-SI-S79

#### Series

93=Omni

#### Light Output

DIP=Direct Indirect Pendant

#### Number of Lamps (per cross section) (not included)

2=2 Lamps 3=3 Lamps

#### Lamp Type

T8

#### Pendant Type

ST=Single Stem <sup>2</sup> SC=Single Cable

#### Run Length

Overall Nominal Run Length\_\_ft. (Any combination of 8', 6', 4' and 3' sections)

#### Voltage <sup>1</sup>

1=120V 2=277V 3=347V U=Universal

#### Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast

#### Switching

SI=Single Switching DU=Dual Switching

#### Emergency

EM=Emergency Pack (Consult Factory)

#### Fusing

GLR GMF


#### Shielding

S79=Semi-Specular Aluminum Parabolic Baffle

<sup>1</sup> Due to various constraints, some options may not be combined with others.

<sup>2</sup> Available with 7° or earthquake 45° swivel canopy assembly.

### ROW CONFIGURATION

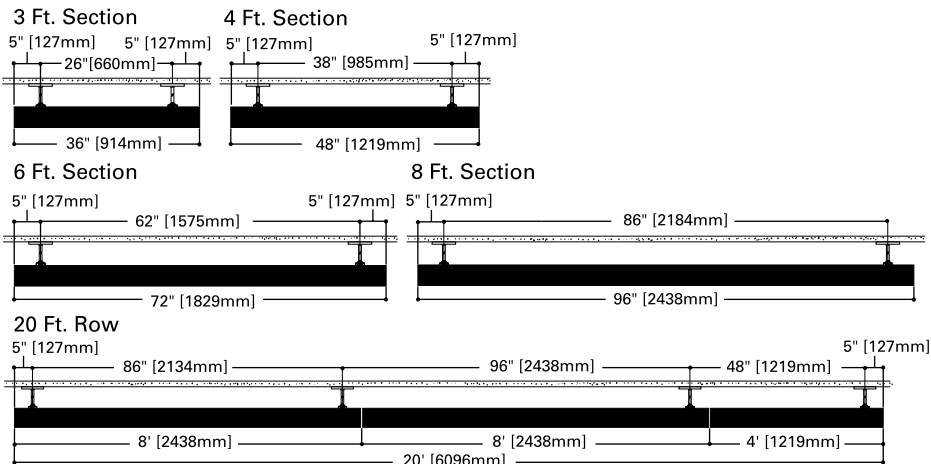

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.