

COOPER LIGHTING - LUMARK®



VS VAPORTIGHT SMALL

50-100W

Metal Halide

High Pressure Sodium

200W

Incandescent

26-42W

Compact Fluorescent

SAFETY AND SECURITY LUMINAIRE


- Housing and threaded guard are die-cast aluminum with 3/4" NPS entry. Standard construction includes thru-way wiring for ceiling or wall mount units. Guard is one piece construction and features stainless steel locking screw for vandal resistance
- Pendant, surface or wall mounting available. Ceiling mount fits 4" round or octagonal J-Box. Pendant mount utilizes a 3/4" NPS
- Sockets are 4kv pulse-rated medium-base porcelain lamp socket for HID applications or Gx24 base for 42W CFL. Lamp included stock packages
- Globe is heat- and impact-resistant glass and accepts up to 200W incandescent in small housing and 300W incandescent in the large housing
- Silicone gasket provides long life vapor seal in housing
- Approximate net weight: 6-14 lbs. (2.73-6.36 kgs.)

DESCRIPTION


Lumark's Vaportight fixtures are designed for heavy-duty, non-corrosive environments. Applications include accent, entrance/eaves, pathway, recreation, retail, security and transportation applications. U.L and CUL listed for non-classified wet locations.

DIMENSIONS

Ceiling / Pendant Mount



Wall Mount

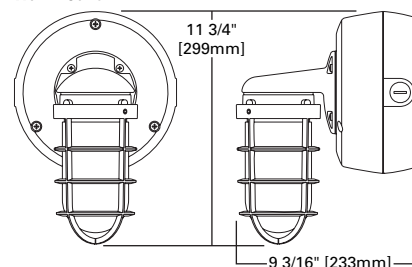

ORDERING INFORMATION

SAMPLE NUMBER: HPVS-W-GG-100-120

Lamp Type HP =High Pressure Sodium MH =Metal Halide IN =Incandescent PL =Compact Fluorescent	Series VS =Vaportight Small	Mounting Type W =Wall Mount C =Ceiling/Pendant Mount	Optics GG =Glass Jar with Globe	Lamp Wattage HID 50=50W 70=70W 100=100W Incandescent 200=200W Compact Fluorescent 26=26W 32=32W 42=42W	Voltage ¹ 120=120V 277=277V 347=347V DT =Dual-Tap 120/277V MT =Multi-Tap E =120-277V Compact Fluorescent Universal Electronic Ballast	Options + Accessories (See Below)
---	--	---	--	--	--	---

Options ²

F1=Single Fuse (120, 277 or 347V)
 _=Grey (Standard)
BK=Black
SY=Silver
WH=White
LL=Lamp Included

Accessories ³

DC1=Concentric Dome 200
DA1=Angle Dome 200

Lamp Type	Ambient Environment	Supply Wire (Min.)
INC	40°C	90°C
CFL (26-42W)	40°C	90°C
HID (50-100W)	40°C (HPS) 25°C (MH)	150°C

NOTES: * Internal Wiring. Wiring in External J-Box is 90°C.