QUIET CEILING™
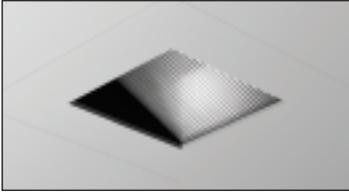
Type: _____   **Project:** _____

4" Lensed Wallwasher Square Trimless Fixture w/ Integral Linear Spread Lens
Insulated Ceiling Housing - 7.5" Height
12V Bi-Pin Base MR16 Lamp 50 Watts Max.

☐ QCT-2275WH   ☐ QCT-2275BK
☐ QCT-2275S   ☐ QCT-2275SS
                ☐ QCT-2275PM

w/ QCT-903-IC Housing

DESCRIPTION:
Recessed trimless fixture for wallwash applications. Exclusive adjustable mud ring accommodates various ceiling thicknesses. Exclusive adjustable mud ring accommodates 1/2", 5/8", 3/4" & 1" ceilings.

ELECTRICAL:
120V input, 12V output. Junction box is U.L. listed for through branch wiring.
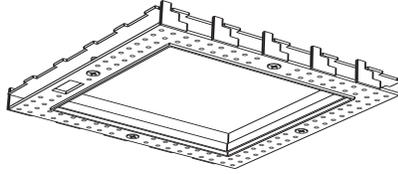
CONSTRUCTION:
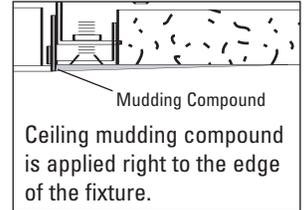Housing and plaster frame: 18 gauge CRS Trim ring, j-box and hanger assemblies: 16 gauge CRS.

SYSTEM PROTECTION:
Thermal protection provided to guard against overheating and misuse of insulation over and around fixture.

• **WASHES VERTICAL SURFACE WITH EVENLY DIFFUSED LIGHT**
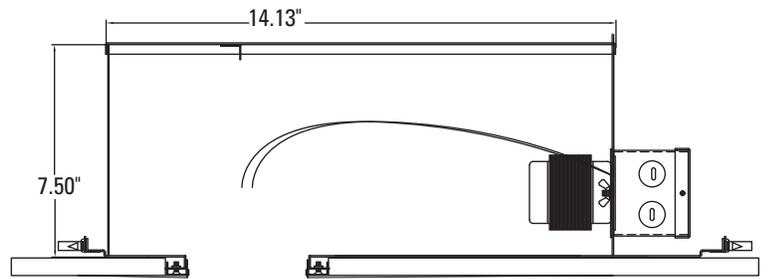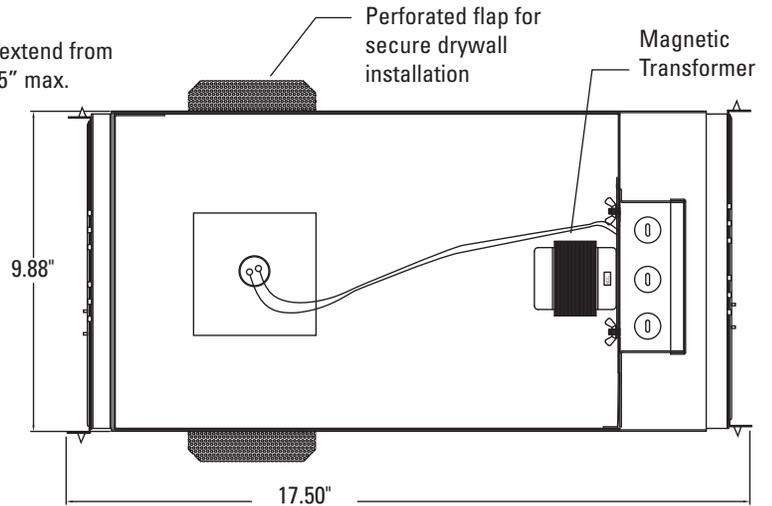• **DESIGNED TO BE INSTALLED WITHIN 18" - 24" OF VERTICAL SURFACE**

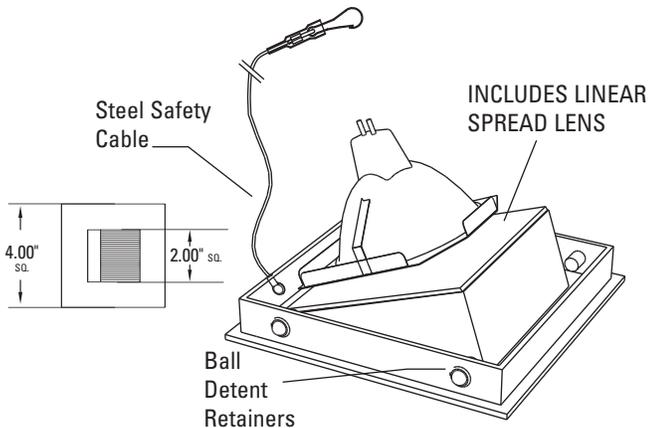Mud Ring adjusts in plaster frame to accommodate 1/2", 5/8", 3/4" & 1" ceilings.

Mudding Compound

Ceiling mudding compound is applied right to the edge of the fixture.

Hanger Bars extend from 14.00" to 25.25" max.

Perforated flap for secure drywall installation

Magnetic Transformer

9.88"

17.50"

Steel Safety Cable

INCLUDES LINEAR SPREAD LENS

4.00" SQ.   2.00" SQ.

Ball Detent Retainers

14.13"

7.50"

Mudding Ring adjusts in plaster frame to accommodate 1/2", 5/8", 3/4" & 1" ceilings.

Item #	Description	Finish	Voltage / Wattage
QCT-2275WH / QCT-903-IC	Quiet Ceiling Series Lensed Wallwasher Square Trimless Fixture with Insulated Ceiling Housing w/ Magnetic Transformer	White	12V / 50W Max.
QCT-2275BK / QCT-903-IC		Black	
QCT-2275S / QCT-903-IC		Silver	
QCT-2275SS / QCT-903-IC		Stainless Steel	
QCT-2275PM / QCT-903-IC		Primer	

c(UL)us

For 277 volt transformer add "**277**" to end of item #.
For Chicago Plenum add "**CP**" to end of item #.

STATE OF WASHINGTON AIRTIGHT APPROVED