

#### **DESCRIPTION**

4" round recessed trimless adjustable slot aperture fixture with hot aiming feature. For use with 12V MR16 lamp 71W max. or CMHMR16 20W or 39W.

For use in downlighting / accent applications.

| Catalog #   | Туре |
|-------------|------|
| Project     |      |
| Comments    | Date |
| Prepared by |      |

#### SPECIFICATION FEATURES

#### A...Trimless Fixture

Round adjustable slot aperture trimless fixture. Includes bullet plunger retainers for smooth snap-in action during installation and removal of trim for relamping. Helps guard against plaster cracking.

#### B...Lamp

For use with 12V MR16 lamp 71W max. or CMH MR16 20W or 39W. Lamp not included. Lamp holder has 45° HOT AIMING adjustability. 12V MR16 fixture includes clear protective glass lens and can accept up to three (3) optical accessories total.

#### C...Socket

Posi-Grip bi-pin socket for 12V MR16. GX10 for metal halide lamps. (Included with Quiet Ceiling Housing sold separately)

### D...Hot Aiming


Lamp may be adjusted with the power on by using a philips screwdriver for up to 45° tilt. Self locking rack and pinion mechanism and visual angle indicators ensure precise adjustment.

#### E ...Finish

Trim face is powder coated in white, black, industrial silver, stainless steel or primer finish for painting in existing ceiling color. All other internal components are flat black.

#### F....Safety

Steel safety cable provided. Attaches to tab inside housing to prevent falling during maintenance or as a result of accidental dislodging of the trim.

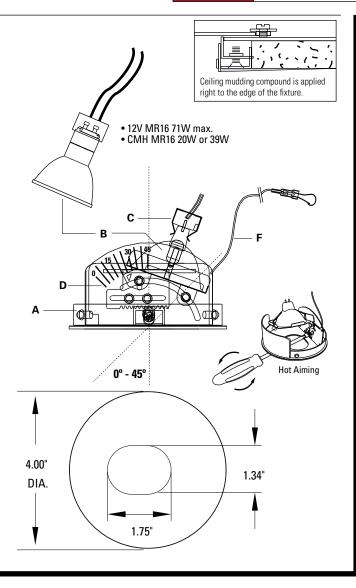



## QUIET CEILING TRIMLESS

# QCT1675 4" Round Trimless Recessed Slot Aperture Fixture

FOR 12V MR16 71W max. CMH MR16 20W or 39W

Compatible Housings:
QCT900 / QCT900MH
QCT902IC / QCT902ICMH
QCT904RM / QCT904RMMH
QCT906SP / QCT906SPMH



#### ORDERING INFORMATION



