

OMRON

Laser Type

Laser Photoelectric Sensor with Built-in Amplifier

E3Z-LT (Through-beam)

E3Z-LR (Retro-reflective)

E3Z-LL (Distance-settable)



The Most Compact Laser Sensor.
The Most Reliable E3Z.




realizing

Advanced Industrial Automation

E3Z Evolution With the Same Superior Quality and Reliability as Before, E3Z Laser Sensors Open the Door to Next-generation Sensing.

The new E3Z Laser Sensors expand the field of application of general-purpose sensing.


Through-beam and Retro-reflective Sensors

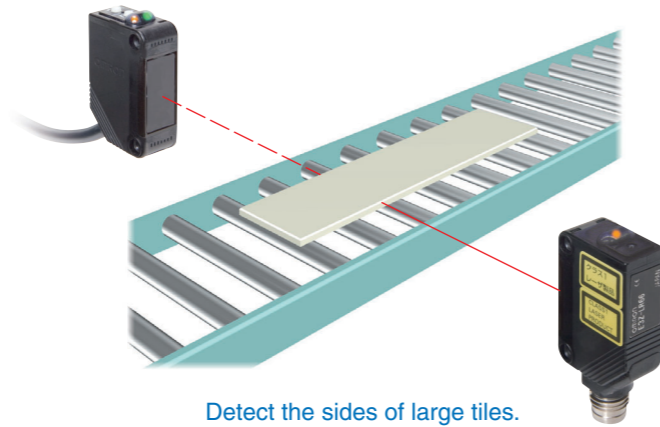

Greatly Enhanced Beam Visibility for Easier Optical Axis Adjustment of Sensors

Detect the sides of large tiles.

- The optical design maximizes the linear propagation of laser beams. Red laser beams (class 1) can be precisely aligned on the targeted position.
- The through-beam sensing distance of 60 m provides sufficient allowance, enabling Through-beam Models to be used with reliability even in dusty environments.
- With Through-beam Models, an emission interruption function is also available by request. This function is ideal for preventive maintenance applications.

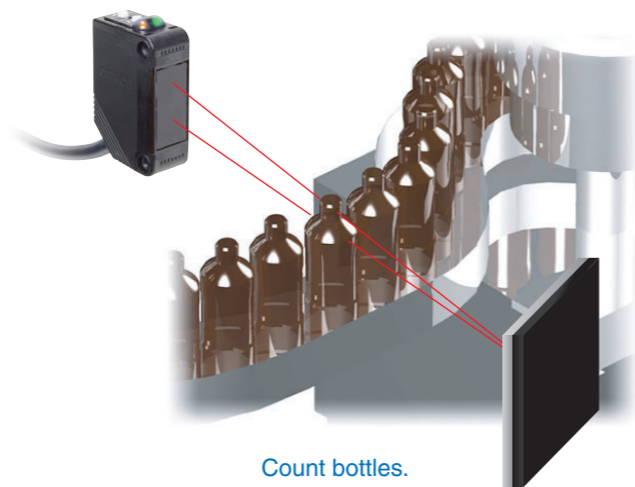

Reliable Detection of Small Objects and Narrow Gaps with the Small Spot


Count bottles.

- The spot diameter for Through-beam and Retro-reflective Models is 5 mm (a typical example at 3 m), making it possible to detect small workpieces at long distances.
- The sensing distance for Retro-reflective Models is 15 m (when an E39-R1 Reflector is used). This is the longest leeway in the industry.
- The maximum ambient operating temperature is 55° with an IP67 degree of protection, allowing the Sensor to be used in severe operating environments.

All Models Provide the Safety and Peace of Mind of Laser Class 1 (JIS and IEC).

BGS Models


Long-distance Sensing at 300 mm (White Paper)

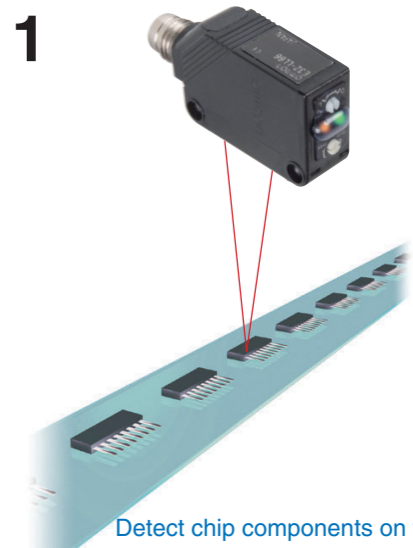

Detect chip components on tape.

- The longest sensing distance in the industry allows flexibility in positioning Sensors.

Easy Detection of Small Workpieces and Minor Differences in Levels with the Small Spot

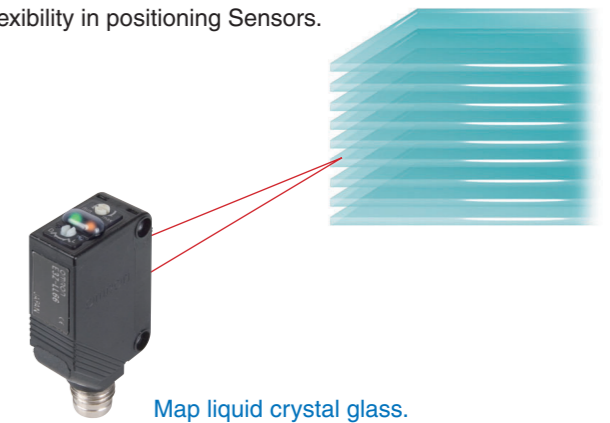

Map liquid crystal glass.

- Stable detection is possible with no influence from a glossy background frame.
- The spot diameter for BGS models is 0.5 mm (typical example at 300 mm). Combined with an hysteresis of only 5%, even minute differences can be detected.
- Models with a response time of 0.5 ms (E3Z-LL□3/□8) are available as standard models for fast-moving objects.

A Low Black/White Error for Applications with Mixed Colors



Detect protruding straws.

- A black/white error as low as 5% makes detection and operation more stable.




Optical Customization for E3Z Lasers That Fit the Application!

The E3Z laser system has an original modular structure. Spot diameters can be customized, as shown in the examples below.

Through-beam Models

Problem We want to use the Sensor at a distance of 30 m, but adjusting the optical axis is difficult.


Solution The adjustment range can be enlarged by increasing the spot diameter.

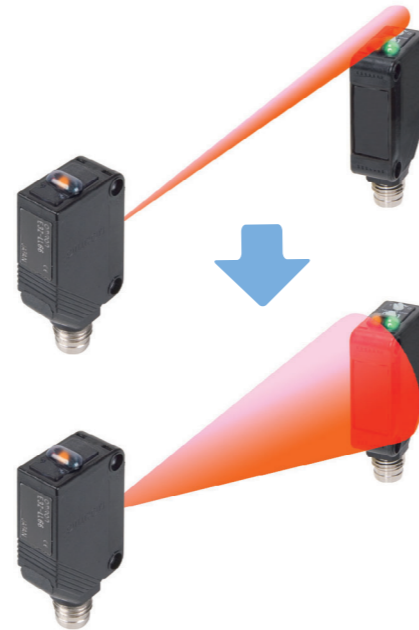

BGS Models

Problem We want to detect minute objects at close range, but the standard spot diameter is too large at close range and detection is unstable.


Solution Detection can be enabled by minimizing the spot diameter at the desired distance. (The minimum distance is 30 mm.)

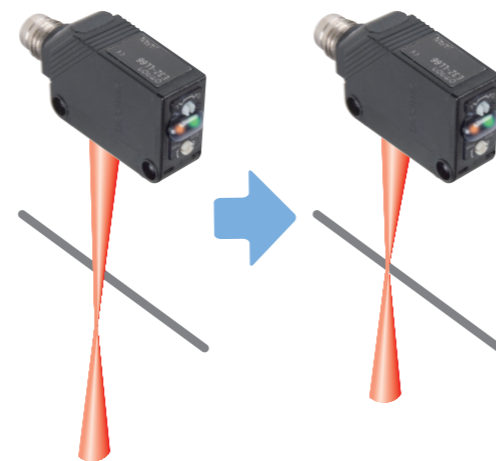

Please ask your OMRON representative for details.

Advanced Optical Technology of the E3Z Laser

Laser beam directional deviation can be suppressed and spot diameters can be freely customized. This is achieved through high-precision alignment technology based on LD and emitter lens modularization. The lens position can be adjusted inline. **(Patent pending.)**

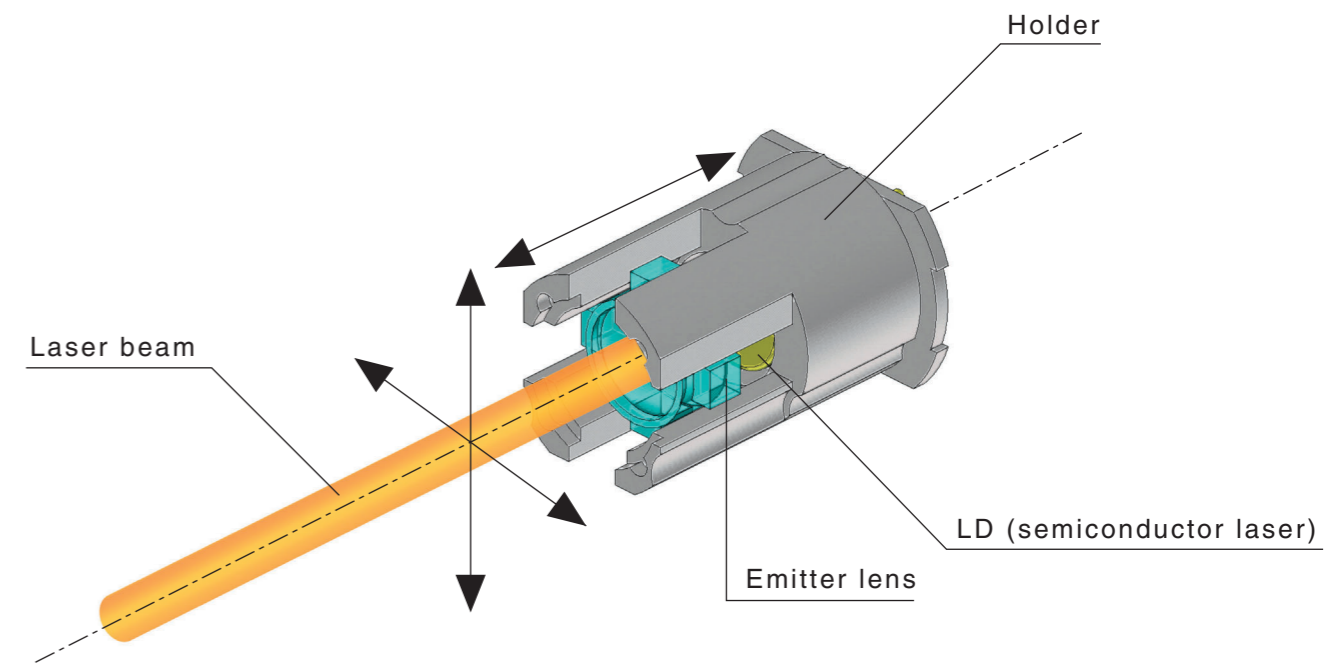

Laser Diagram Conceptual Diagram


By precisely adjusting the emitter lens in the vertical, horizontal, and depth directions, alignment can be achieved with minimal directional deviation (to ± 1 degree).

A Better Fit!

A Better Fit for Total Reliability!

The ultimate goal of the E3Z is to create the ideal sensor for an ever-expanding range of applications. In the end, the same delivery service and reliability should be achieved in all circumstances, with no distinction between standard products and custom-made products.

The E3Z continues to evolve to provide Sensors that fit your needs in any situation and provide you with total reliability.

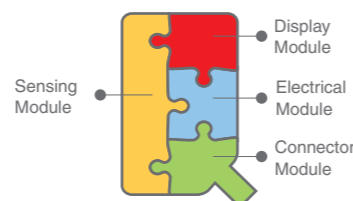

Of Course, Ecological.

Total European RoHS Compliance (Available soon)

Lead, mercury, cadmium, chromium, polybromide biphenyl, and polybromide diphenyl ether have been completely eliminated.







The environment-friendly features of the previous E3Z, such as energy-saving and resource-saving, are carried into the E3Z Laser as well.

- Low-power circuit design
- Polyethylene packaging that can be incinerated as general waste
- Standard 0.5-m Pre-wired Models

Ordering Information

Sensors

 Red light

Sensing method	Appearance	Connection method	Response time	Sensing distance	Model				
					NPN output	PNP output			
Through-beam		Pre-wired (2 m)*3	1 ms		4	E3Z-LT61	E3Z-LT81		
		Connector (M8, 4 pins)				E3Z-LT66	E3Z-LT86		
Retro-reflective with MSR function		Pre-wired (2 m)*3		1 ms		2	E3Z-LR61	E3Z-LR81	
		Connector (M8, 4 pins)					E3Z-LR66	E3Z-LR86	
									15 m (300 mm) (Using E39-R1)
									7 m (200 mm) (Using E39-R12)
Distance-settable (BGS Models)		Pre-wired (2 m)*3		0.5 ms		4	E3Z-LL61	E3Z-LL81	
		Connector (M8, 4 pins)					E3Z-LL66	E3Z-LL86	
			20 to 40 mm (Min. distance set)						
			20 to 300 mm (Max. distance set)						
		Pre-wired (2 m)*3	0.5 ms		4	E3Z-LL63	E3Z-LL83		
		Connector (M8, 4 pins)				E3Z-LL68	E3Z-LL88		
						25 to 40 mm (Min. distance set)			
						25 to 300 mm (Max. distance set)			

*1. The Reflector is sold separately. Select the Reflector model most suited to the application.

*2. Values in parentheses indicate the minimum required distance between the Sensor and Reflector.

*3. Pre-wired Models with a 0.5-m cable are also available for these products. When ordering, specify the cable length by adding "0.5M" to the end of the model number (e.g., E3Z-LT61 0.5M).

M12 Pre-wired Connector Models are also available. When ordering, add "-M1J" to the end of the model number (e.g., E3Z-LT61-M1J). The cable is 0.3 m long.

The following connection forms are also available. Ask your OMRON representative for details.

- Pre-wired Models with 1-m or 5-m cables
- Pre-wired Connector Models with M8 4-pin connectors, M8 3-pin connectors, or e-CON connectors.

*4. Consult with your OMRON representative if a distance of more than 10 m is required. Models with large custom-size spots can be produced. These make optical axis adjustment easier and allow the beam to be received more stably by the Receiver even if vibration is present.

Accessories










Slits (for E3Z-LT□□)

Slit width	Sensing distance	Minimum detectable object (typical)	Model	Contents
0.5 mm dia.	3 m	0.1 mm dia.	E39-S65A	One set (contains Slits for both the Emitter and Receiver)

Reflectors (for E3Z-LR□□)







Name	Sensing distance (typical)	Model	Remarks
Reflector	15 m (300 mm)	E39-R1	<ul style="list-style-type: none"> • Retro-reflective models are not provided with Reflectors. • Separate the Sensor and the Reflector by at least the distance given in parentheses. • The MSR function is enabled.
	7 m (200 mm)	E39-R12	
	7 m (200 mm)	E39-R6	

Mounting Brackets

Appearance	Model	Quantity	Remarks	Appearance	Model	Quantity	Remarks
	E39-L153	1	Mounting Brackets		E39-L98	1	Metal Protective Cover Bracket *
	E39-L104	1			E39-L150	1 set	(Sensor adjuster)
	E39-L43	1	Horizontal Mounting Bracket*		E39-L151	1 set	Easily mounted to the aluminum frame rails of conveyors and easily adjusted.
	E39-L142	1	Horizontal Protective Cover Bracket*				For left to right adjustment
	E39-L44	1	Rear Mounting Bracket		E39-L144	1	Compact Protective Cover Bracket (For E3Z only) *

Note: When using Through-beam models, order one bracket for the Receiver and one for the Emitter.
 * Cannot be used for Standard Connector models.

Sensor I/O Connectors

Size	Cable	Appearance	Cable type	Model	
M8	Standard	Straight 	2 m	4-wire	XS3F-M421-402-A
			5 m		XS3F-M421-405-A
		L-shaped 	2 m		XS3F-M422-402-A
			5 m		XS3F-M422-405-A
M12 (For -M1J models)		Straight 	2 m	3-wire	XS2F-D421-DC0-A
			5 m		XS2F-D421-GC0-A
		L-shaped 	2 m		XS2F-D422-DC0-A
			5 m		XS2F-D422-GC0-A
e-CON	Connector on One End 	2 m	4-wire	E39-ECON2M	
		5 m		E39-ECON5M	
	Connectors of Both Ends 	0.5 to 1 m		E39-ECON□M	
		1.1 to 1.5 m			
		1.6 to 2 m	Replace the box (□) in the model number by the cable length in increments of 0.1 m.		

Ratings and Specifications

Sensing method		Through-beam	Retro-reflective with MSR function	Distance-settable (BGS models)	
Response		Standard response			High-speed response
Item	Model	E3Z-LT61/-LT66	E3Z-LR61/-LR66	E3Z-LL61/-LL66	E3Z-LL63/-LL68
	NPN output PNP output	E3Z-LT81/-LT86	E3Z-LR81/-LR86	E3Z-LL81/-LL86	E3Z-LL83/-LL88
Sensing distance		60 m *1	0.3 to 15 m (when using E39-R1) 0.2 to 7 m (when using E39-R12) 0.2 to 7 m (when using E39-R6)	White paper (100 × 100 mm): 20 to 300 mm Black paper (100 × 100 mm): 20 to 160 mm	White paper (100 × 100 mm): 25 to 300 mm Black paper (100 × 100 mm): 25 to 100 mm
Set distance range		---		White paper (100 × 100 mm): 40 to 300 mm Black paper (100 × 100 mm): 40 to 160 mm	White paper (100 × 100 mm): 40 to 300 mm Black paper (100 × 100 mm): 40 to 100 mm
Spot diameter (typical)		5-mm dia. at 3 m		0.5-mm dia. at 300 mm	
Standard sensing object		Opaque: 12-mm dia. min.	Opaque: 75-mm dia. min.	---	
Minimum detectable object (typical)		6-mm-dia. opaque object at 3 m		0.2-mm-dia. stainless-steel pin gauge at 300 mm	
Differential travel		---		5% max. of set distance	
Black/white error		---		5% at 160 mm	5% at 100 mm
Directional angle		Receiver: 3 to 15°	---		
Light source (wavelength)		Red LD (655 nm), JIS CClass 1, IEC Class 1, FDA Class II			
Power supply voltage		12 to 24 VDC±10%, ripple (p-p): 10% max.			
Current consumption		Emitter: 15 mA Receiver: 20 mA	30 mA max.		
Control output		Load power supply voltage: 26.4 VDC max., Load current: 100 mA max., Open collector output			
Residual output voltage		Load current of less than 10 mA: 1 V max. Load current of 10 to 100 mA: 2 V max.			
Output mode switching		Switch to change between light-ON and dark-ON			
Protection circuits		Reversed power supply polarity protection, Output short-circuit protection, and Reversed output polarity protection	Reversed power supply polarity protection, Output short-circuit protection, Mutual interference prevention, and Reversed output polarity protection		
Response time		Operate or reset: 1 ms max.			Operate or reset: 0.5 ms max.
Sensitivity adjustment		One-turn adjuster		Five-turn endless adjuster	
Ambient illumination (Receiver side)		Incandescent lamp: 3,000 lx max. Sunlight: 10,000 lx max.			
Ambient temperature range		Operating: -10 to 55°C, Storage: -25 to 70°C (with no icing or condensation)			
Ambient humidity range		Operating: 35% to 85%, Storage: 35% to 95% (with no icing or condensation)			
Insulation resistance		20 MΩ min. at 500 VDC			
Dielectric strength		1,000 VAC, 50/60 Hz for 1 min			
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		Destruction: 500 m/s ² 3 times each in X, Y, and Z directions			
Degree of protection		IP67 (IEC 60529)			
Connection method		Pre-wired cable (standard length: 2 m): Standard M8 Connector:	E3Z-L□□1/-L□□3 E3Z-L□□6/-L□□8		
Indicator		Operation indicator (orange) Stability indicator (green) Emitter for Through-beam Models has power indicator (orange) only.			
Weight (packed state)	Pre-wired cable (2 m)	Approx. 120 g	Approx. 65 g		
	Standard Connector	Approx. 30 g	Approx. 20 g		
Material	Case	PBT (polybutylene terephthalate)			
	Lens	Modified polyarylate resin	Methacrylic resin	Modified polyarylate resin	
Accessories		Instruction manual (Neither Reflectors nor Mounting Brackets are provided with any of the above models.)			

*1. Consult with your OMRON representative if a distance of more than 10 m is required. Models with large custom-size spots can be produced. These make optical axis adjustment easier and allow the beam to be received more stably by the Receiver even if vibration is present.


*2. An emission stop function can be added to Through-beam Models as a custom function. Ask your OMRON representative for details.

Engineering Data (Typical)

Parallel Operating Range


Through-beam Models

E3Z-LT□□

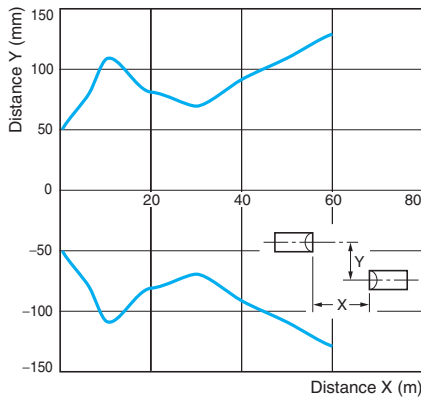

Retro-reflective Models


E3Z-LR□□

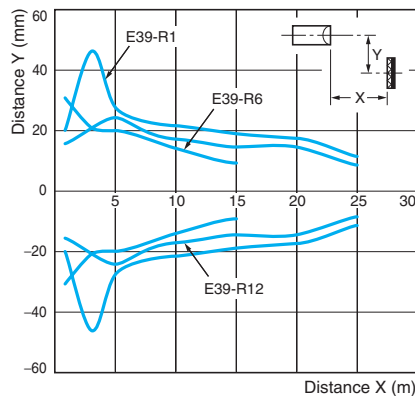

Operating Range at a Set Distance of 300 mm

BGS Models


E3Z-LL□□

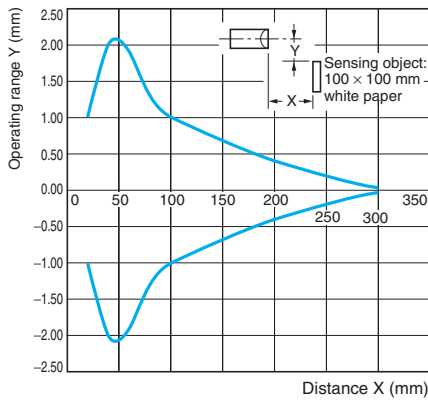

Operating Range at a Set Distance of 40 mm

BGS Models


E3Z-LL□□

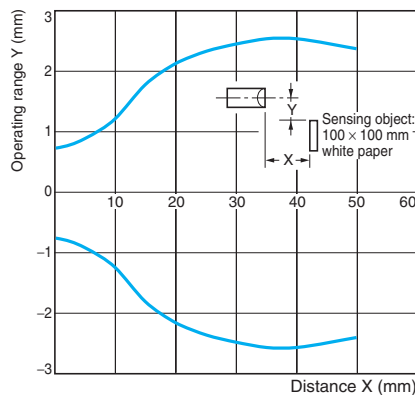

Excess Gain vs. Set Distance


Through-beam Models

E3Z-LT□□

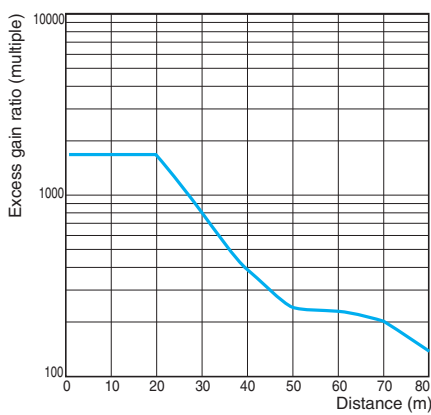

Retro-reflective Models


E3Z-LR□□

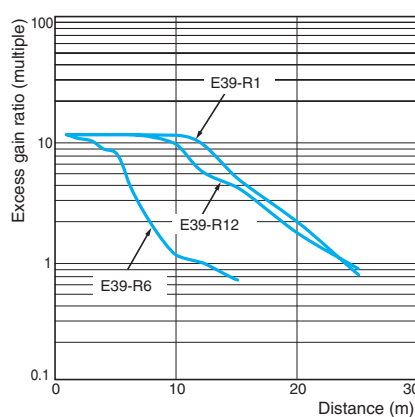


Close Range Characteristics

BGS Models

E3Z-LL□1/-LL□6

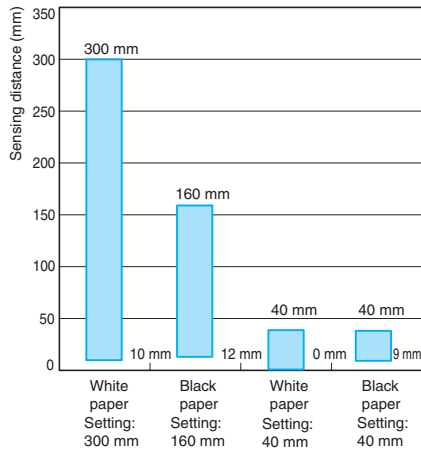

E3Z-LL□3/-LL□8

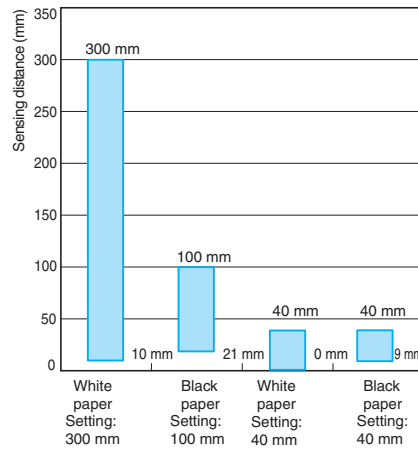


Sensing Distance vs. Sensing Object Material

BGS Models


E3Z-LL□1/-LL□6

White Paper with a Set Distance of 40 mm

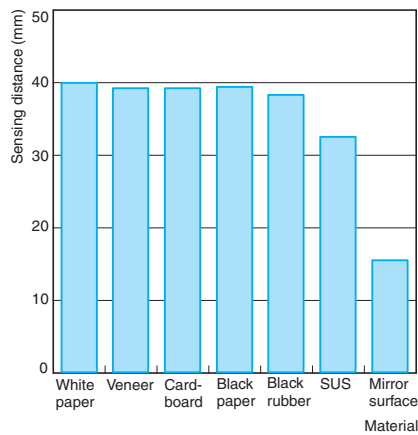


E3Z-LL□3/-LL□8

White Paper with a Set Distance of 40 mm

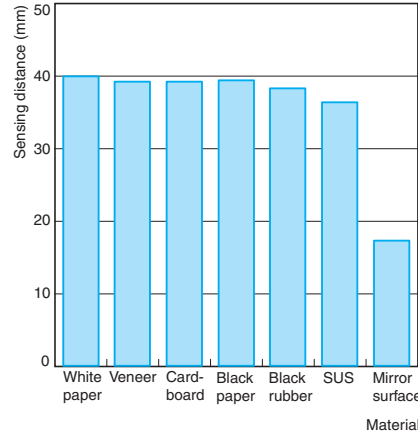


E3Z-LL□1/-LL□6

White Paper with a Set Distance of 300 mm

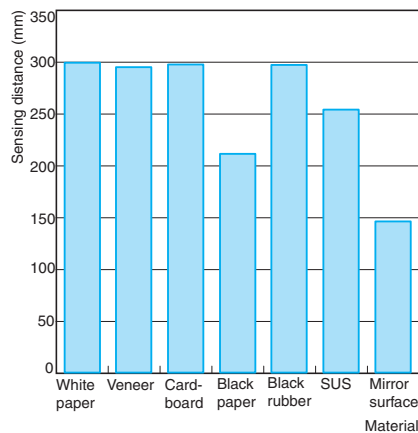

E3Z-LL□3/-LL□8

White Paper with a Set Distance of 100 mm

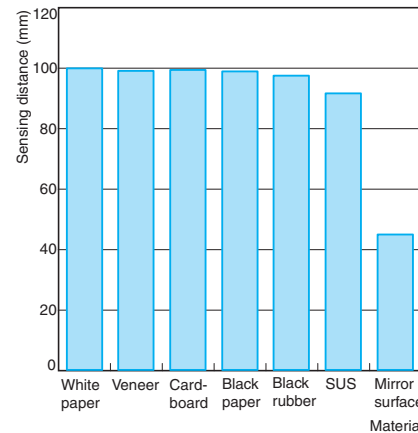


Emission Spot Diameter vs. Distance

Through-beam and Retro-reflective Models (Same for All Models)


E3Z-LT□□

E3Z-LR□□

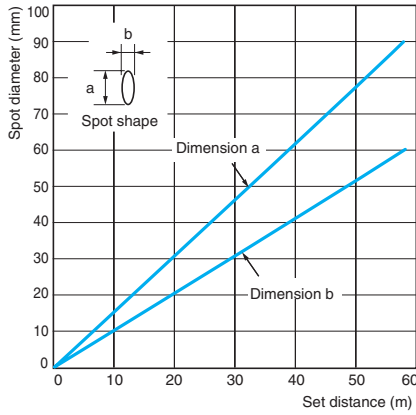

BGS Models (Same for All Models)


E3Z-LL□□

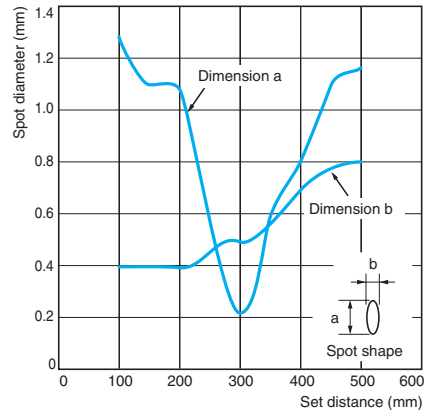


Hysteresis vs. Distance

BGS Models

E3Z-LL□1 (LL□6)

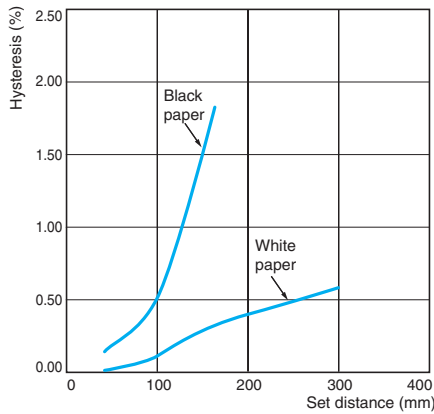


E3Z-LL□3 (LL□8)

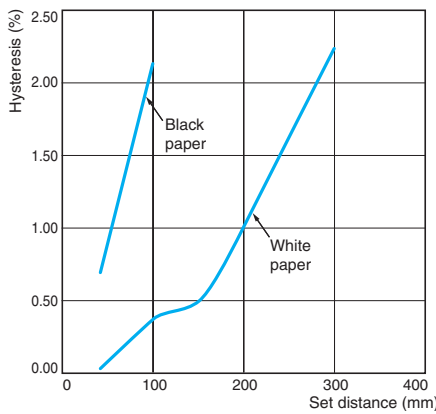

Inclination Characteristics (Vertical)

BGS Models


E3Z-LL□□

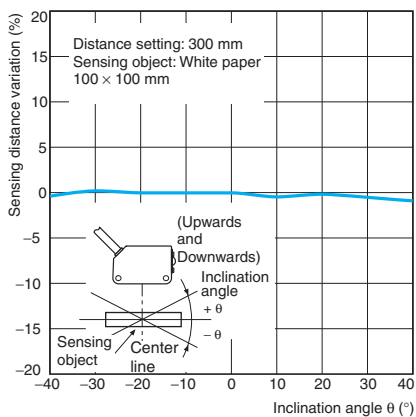

Inclination Characteristics (Horizontal)

BGS Models

E3Z-LL□□

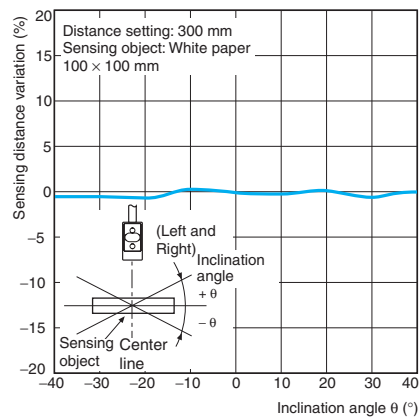

I/O Circuit Diagrams

NPN Output

Model	Operation mode	Timing charts	Mode selector switch	Output circuit
E3Z-LT61 E3Z-LT66 E3Z-LR61 E3Z-LR66	Light-ON	<p>(Between brown and black leads)</p>	L side (LIGHT ON)	<p>Through-beam Receivers, Retro-reflective Models</p> <p>M12 Connector Pin Arrangement: </p> <p>M8 4-pin Connector Pin Arrangement: </p> <p>M8 3-pin Connector Pin Arrangement: </p> <p>e-CON Connector Pin Arrangement: </p> <p>Pin 2 is not used.</p>
	Dark-ON	<p>(Between brown and black leads)</p>	D side (DARK ON)	
	<p>Through-beam Emitter</p>			
E3Z-LL61 E3Z-LL66 E3Z-LL63 E3Z-LL68	Light-ON	<p>(Between brown and black leads)</p>	L side (LIGHT ON)	<p>Through-beam Receivers, Retro-reflective Models</p> <p>M12 Connector Pin Arrangement: </p> <p>M8 4-pin Connector Pin Arrangement: </p> <p>M8 3-pin Connector Pin Arrangement: </p> <p>e-CON Connector Pin Arrangement: </p> <p>Pin 4 is not used.</p>
	Dark-ON	<p>(Between brown and black leads)</p>	D side (DARK ON)	


PNP Output

Model	Operation mode	Timing charts	Mode selector switch	Output circuit
E3Z-LT81 E3Z-LT86 E3Z-LR81 E3Z-LR86	Light-ON	<p>(Between blue and black leads)</p>	L side (LIGHT ON)	<p>Through-beam Receivers, Retro-reflective Models</p> <p>M12 Connector Pin Arrangement: </p> <p>M8 4-pin Connector Pin Arrangement: </p> <p>M8 3-pin Connector Pin Arrangement: </p> <p>e-CON Connector Pin Arrangement: </p> <p>Pin 2 is not used.</p>
	Dark-ON	<p>(Between blue and black leads)</p>	D side (DARK ON)	
	<p>Through-beam Emitter</p>			


Model	Operation mode	Timing charts	Mode selector switch	Output circuit
E3Z-LL81 E3Z-LL86 E3Z-LL83 E3Z-LL88	Light-ON	<p>Operation indicator (orange) ON OFF</p> <p>Output transistor ON OFF</p> <p>Load (e.g., relay) Operate Reset (Between blue and black leads)</p>	L side (LIGHT ON)	<p>M12 Connector Pin Arrangement</p> <p>M8 4-pin Connector Pin Arrangement</p> <p>M8 3-pin Connector Pin Arrangement</p> <p>e-CON Connector Pin Arrangement</p> <p>Pin 4 is not used.</p>
	Dark-ON	<p>Operation indicator (orange) ON OFF</p> <p>Output transistor ON OFF</p> <p>Load (e.g., relay) Operate Reset (Between blue and black leads)</p>	D side (DARK ON)	

Plugs (Sensor I/O Connectors)


M8 4-pin Connectors

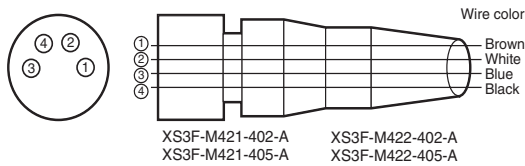

M12 Connectors

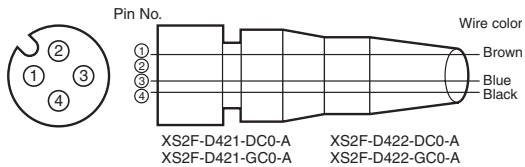

e-CON Connector

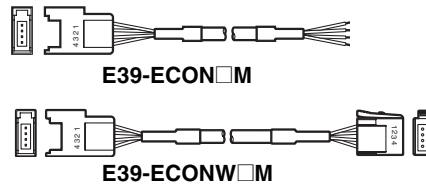

Classification	Wire color	Connector pin No.	Application
DC	Brown	1	Power supply (+V)
	White	2	---
	Blue	3	Power supply (0 V)
	Black	4	Output

Note: 1. Pin 2 is not used.

2. The above M8 and M12 Connectors made by OMRON are IP67.

Nomenclature

Sensors with Sensitivity Adjustment and Mode Selector Switch

Through-beam Models

E3Z-LT□□ (Receiver)

Retro-reflective Models


E3Z-LR□□



Distance-settable Sensor

BGS Models

E3Z-LL□□

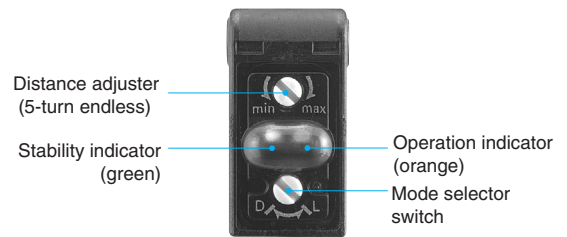

Safety Precautions

Refer to *Warranty and Limitations of Liability* on page 20.

WARNING

This product is not designed or rated for ensuring safety of persons. Do not use it for such purpose.



To ensure safe use of laser products, do not allow the laser beam to enter your eye. Direct exposure may adversely affect your eyesight.



CAUTION

Do not connect an AC power supply to the Sensor. If AC power (100 VAC or more) is supplied to the Sensor, it may explode or burn.



Precautions for Safe Use

Be sure to abide by the following precautions for the safe operation of the Sensor.

● Operating Environment

Do not use the Sensor in locations with explosive or flammable gas.

● Wiring

Power Supply Voltage and Output Load Power Supply Voltage

Make sure that the power supply to the Sensor is within the rated voltage range. If a voltage exceeding the rated voltage range is supplied to the Sensor, it may explode or burn.

Power Supply Voltage

The maximum power supply voltage is 26.4 VDC. Applying a voltage exceeding the rated range may damage the Sensor or cause burning.

Load

Do not use a load that exceeds the rated load.

Load Short-circuiting

Do not short-circuit the load, otherwise the Sensor may be damaged or it may burn.

Connection without Load

Do not connect the power supply to the Sensor with no load connected, otherwise the internal elements may explode or burn. Always connect a load when wiring.

Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

● Laser Warning Labels

Be sure that the correct laser warning label (enclosed) is attached for the country of intended use of the equipment containing the Photoelectric Sensor. Refer to the user's manual for details.

● Usage Environment

Water Resistance

The Sensor is rated IP67. Do not use it in water, in the rain, or outdoors.

Ambient Environment

Do not install the product in the following locations. Doing so may result in product failure or malfunction.

- Locations subject to excess dust and dirt
- Locations subject to direct sunlight
- Locations subject to corrosive gas
- Locations subject to organic solvents
- Locations subject to shock or vibration
- Locations subject to exposure to water, oil, or chemicals
- Locations subject to high humidity or condensation

● Designing

Power Reset Time

The Sensor is ready to operate 100 ms after the Sensor is turned ON. If the load and Sensor are connected to independent power supplies respectively, be sure to turn ON the Sensor before supplying power to the load.

● Wiring

Avoiding Malfunctions

If using the Sensor with an inverter or servomotor, always ground the FG (frame ground) and G (ground) terminals, otherwise the Sensor may malfunction.

● Mounting

Mounting the Sensor


- If Sensors are mounted face-to-face, make sure that the optical axes are not in opposition to each other. Otherwise, mutual interference may result.
- Always install the Sensor carefully so that the aperture angle range of the Sensor will not cause it to be directly exposed to intensive light, such as sunlight, fluorescent light, or incandescent light.
- Do not strike the Photoelectric Sensor with a hammer or any other tool during the installation of the Sensor, or the Sensor will lose its water-resistive properties.
- Use M3 screws to mount the Sensor.
- When mounting the case, make sure that the tightening torque applied to each screw does not exceed 0.54 N·m.

Metal Connectors

- Always turn OFF the power supply to the Sensor before connecting or disconnecting the metal connector.
- Hold the connector cover to connect or disconnect it.
- Secure the connector cover by hand. Do not use pliers, otherwise the connector may be damaged.
- Use a tightening torque of 0.3 to 0.4 N·m for M8 connectors and 0.4 to 0.5 N·m for M12 connectors. Vibration may cause the connectors to become loose and reduce the degree of protection if the tightening torque is not sufficient.


Mounting Direction for Distance-settable Models

- Make sure that the sensing side of the Sensor is parallel with the surface of the sensing objects. Normally, do not incline the Sensor towards the sensing object.

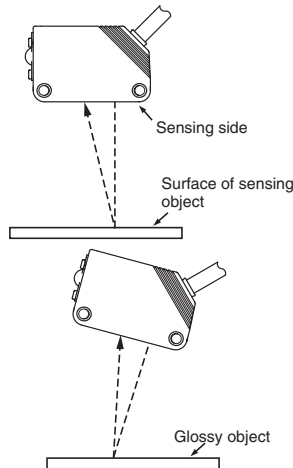


If the sensing object has a glossy surface, however, incline the Sensor by 5° to 10° as shown in the illustration, provided that the Sensor is not influenced by background objects.


- If there is a mirror-like object below the Sensor, the Sensor may not operate stably. Therefore, incline the Sensor or separate the Sensor from the mirror-like object as shown below.

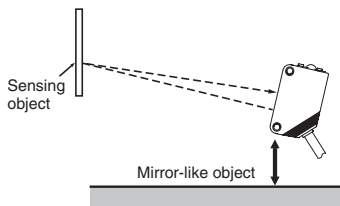


- Do not install the Sensor in the wrong direction. Refer to the following illustration.

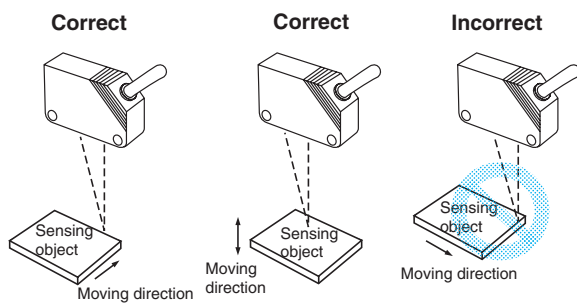

Install the Sensor as shown in the following illustration if each sensing object greatly differs in color or material.

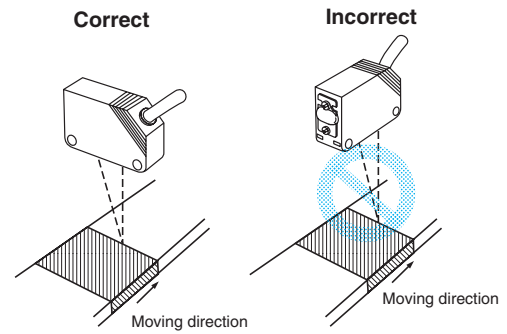

Adjusting Distance-settable Models
Indicator Operation

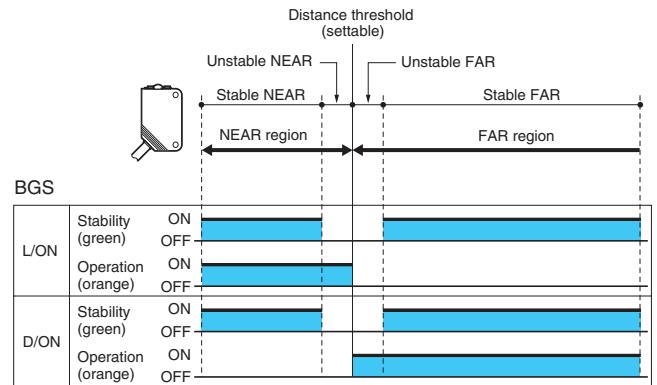

Note: If the stability indicator is lit, the detection/no detection status is stable within the rated ambient operating temperature (-10 to 55°C).

Inspection and Maintenance


Cleaning

Never use paint thinners or other organic solvents to clean the surface of the product.

Dimensions

Sensors


Through-beam
Pre-wired Models
E3Z-LT61
E3Z-LT81

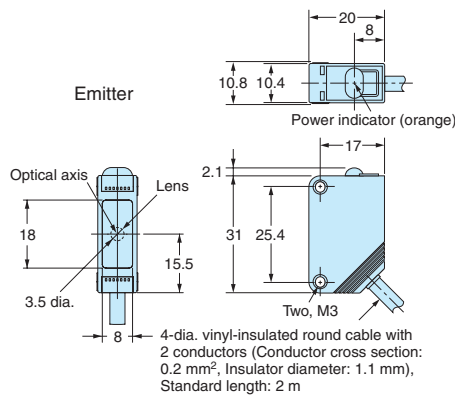


Terminal No.	Specifications
1	+V
2	---
3	0 V
4	---

Pins 2 and 4 are not used.


M12 Pre-wired Connector
(E3Z-LT□□-M1J)

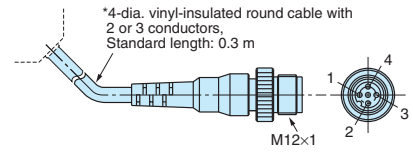


M8 Pre-wired Connector
(Ask your OMRON representative for details.)

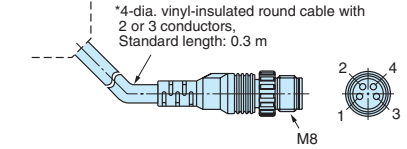


M8 3-pin Pre-wired Connector
(Ask your OMRON representative for details.)

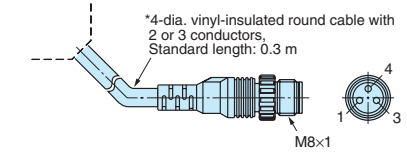

Press-fit e-CON Pre-wired Connector
(Ask your OMRON representative for details.)





* The Emitter cable has two conductors and the Receiver cable has three conductors.

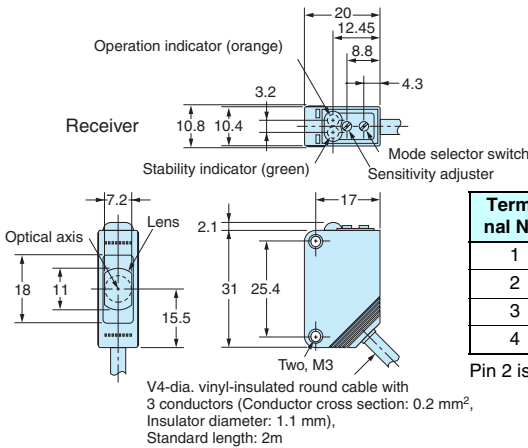

Terminal No.	Specifications
1	+V
2	---
3	0 V
4	Output


Pin 2 is not used.

Through-beam
Standard Connector
Models
E3Z-LT66
E3Z-LT86

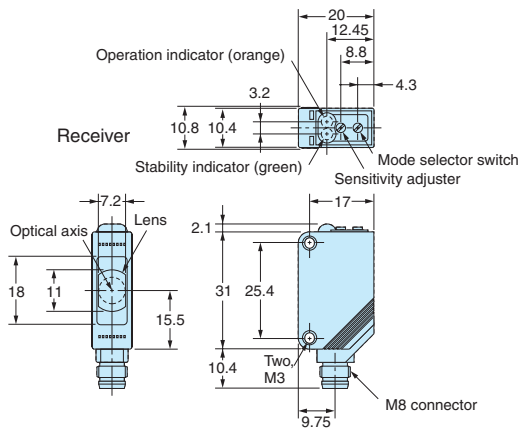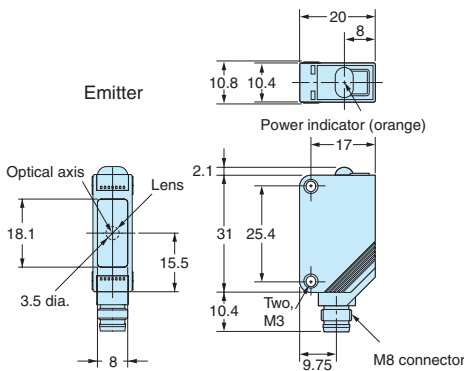


Retro-reflective Models

Pre-wired Models
E3Z-LR61
E3Z-LR81

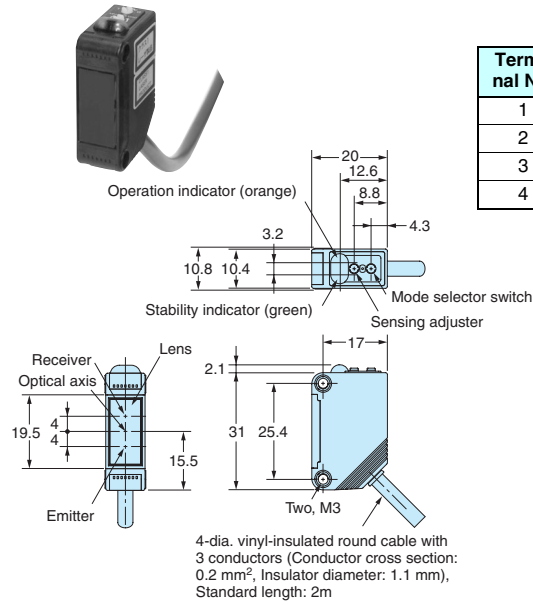


Terminal No.	Specifications
1	+V
2	—
3	0 V
4	Output


M12 Pre-wired Connector
(E3Z-LR□□-M1J)

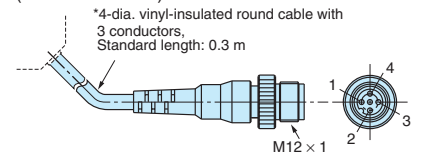


M8 Pre-wired Connector
(Ask your OMRON representative for details.)

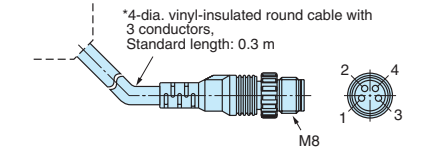

M8 3-pin Pre-wired Connector
(Ask your OMRON representative for details.)

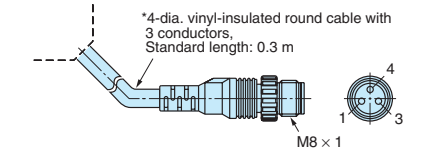


Press-fit e-CON Pre-wired Connector
(Ask your OMRON representative for details.)



Retro-reflective Models


Standard Connector Models
E3Z-LR66
E3Z-LR86

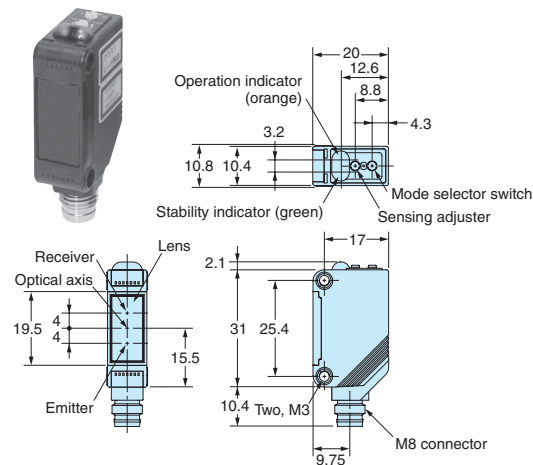

BGS Models


Pre-wired Models

- E3Z-LL61
- E3Z-LL81
- E3Z-LL63
- E3Z-LL83

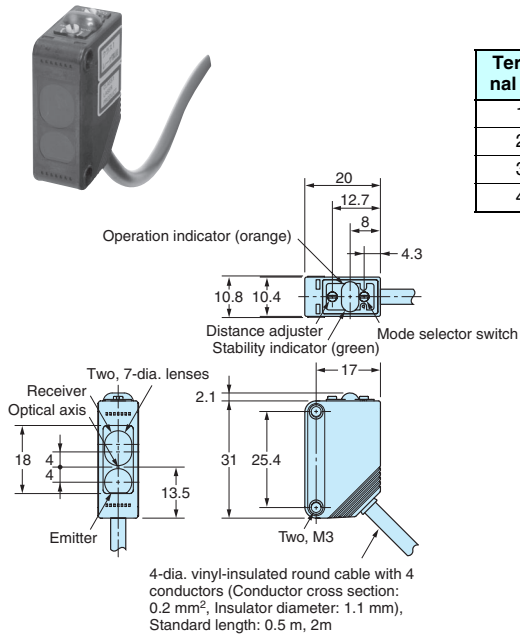


Terminal No.	Specifications
1	+V
2	---
3	0 V
4	Output


M12 Pre-wired Connector
(E3Z-LL□□-M1J)

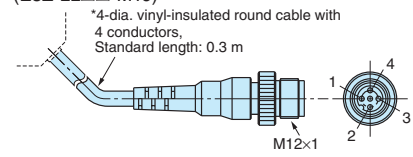


M8 Pre-wired Connector
(Ask your OMRON representative for details.)

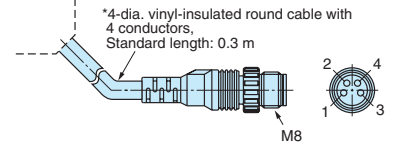

M8 3-pin Pre-wired Connector
(Ask your OMRON representative for details.)

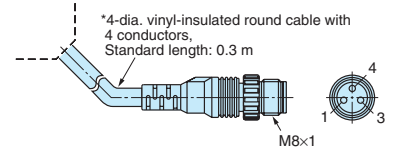

Press-fit e-CON Pre-wired Connector
(Ask your OMRON representative for details.)

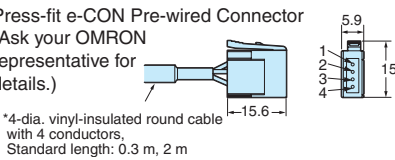


BGS Models

Standard M8

Connector Models


- E3Z-LL66
- E3Z-LL86
- E3Z-LL68
- E3Z-LL88

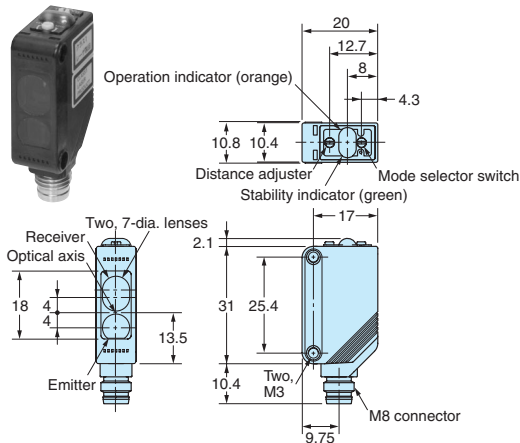

Accessories (Order Separately)

Slit


E39-S65A

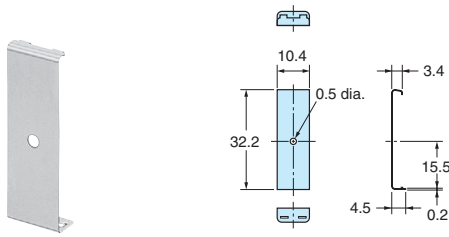

Material
SUS301 stainless steel

Reflector


E39-R1

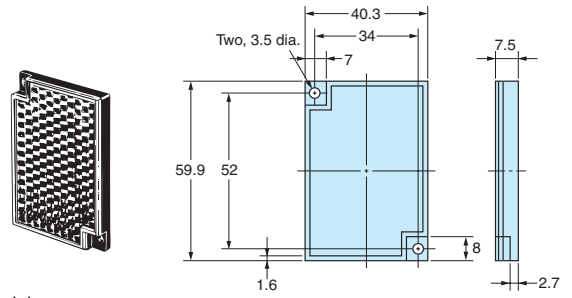

Materials
Reflective surface: Acrylic
Rear surface: ABS

Reflector


E39-R6

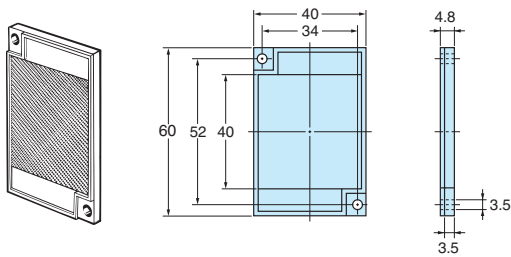

Materials
Reflective surface: Acrylic
Rear surface: ABS

Reflector

E39-R12

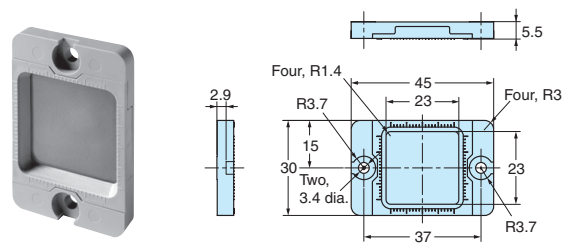

Materials
Reflector: Polycarbonate (surface)
Acrylic (interior)
Frame: ABS

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

SUITABILITY FOR USE

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PERFORMANCE DATA

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. E368-E1-01

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation

Industrial Automation Company

Sensing Devices Division H.Q.

Industrial Sensors Division

Shiokoji Horikawa, Shimogyo-ku,

Kyoto, 600-8530 Japan

Tel: (81)75-344-7022/Fax: (81)75-344-7107