

## DESCRIPTION

Insulated ceiling AirTite housing for Quiet Ceiling square trimless fixtures. For 12V MR16 50 watts max.

For insulated ceiling applications. Rated for direct contact with insulation material.

Catalog #		Type
Project		
Comments		Date
Prepared by		

## SPECIFICATION FEATURES

### A...Housing

Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable trimless mud-ring can accommodate 1/2", 5/8", 3/4" & 1" ceiling thickness.

### B...System Protection:

Thermal protection provided.

### C...Electrical

Integral j-box and electronic or magnetic low voltage transformer. 120V or 277V input, 12V output. Junction box is U.L. listed for through branch wiring. Includes five 1/2 trade size knockouts (six knockouts when magnetic xfmr. is specified).



### D...Lamp

12V MR16 71 watts max. (not included) Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.

### E...Mounting

Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively. Perforated flaps for secure drywall installation.

Ceiling Cut-Out: 5.50" sq.

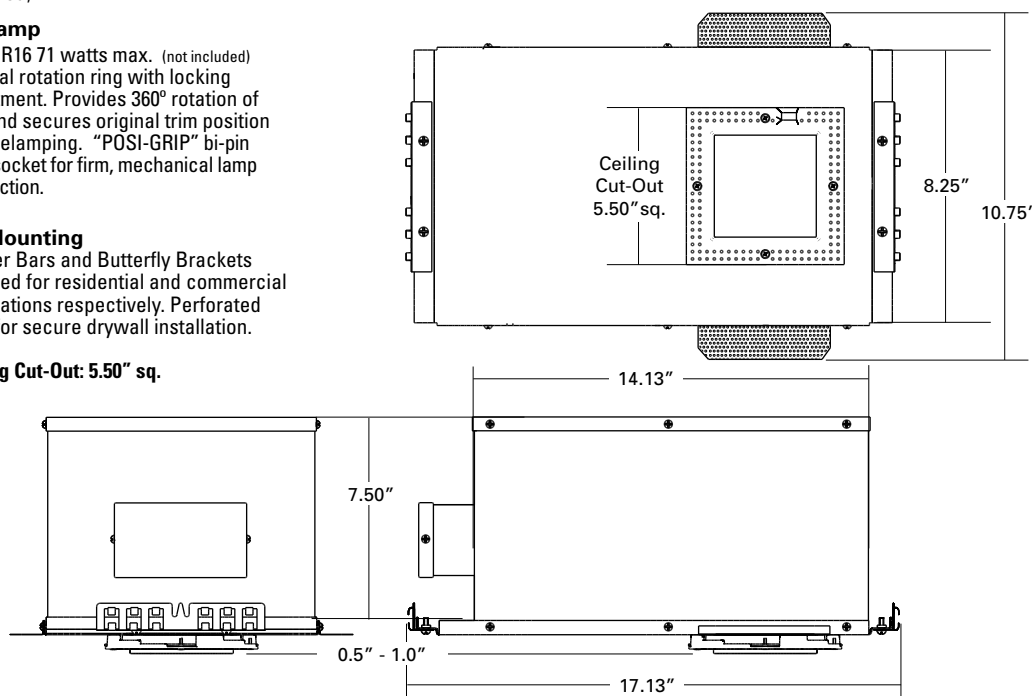

## QUIET CEILING TRIMLESS

### QCT903IC Insulated Ceiling AirTite Housing for Square Trim

FOR 12V MR16 50W max.



## ORDERING INFORMATION

QCT903IC		
<b>Housing</b> QCT903IC = Quiet Ceiling Insulated Ceiling Housing AirTite for Square Trim w/ Integral Low Voltage Transformer	<b>Transformer</b> ELC = Electronic MAG = Magnetic	<b>Voltage</b> 120 = 120 volts primary 277 = 277 volts primary