

## DESCRIPTION

New construction I.C. housing for Mini Quiet Ceiling small aperture round trimless fixtures. (QCM5001, QCM5002, QCM5003, QCM5004).

For use in insulated ceiling I.C. applications. Housing may be covered on all sides with insulation material.

Catalog #		Type
Project		
Comments		Date
Prepared by		

## SPECIFICATION FEATURES

### A...Housing

Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable trimless mud-ring can accommodate 1/2", 5/8", 3/4" & 1" ceiling thickness.

### B...System Protection:

Thermal protection provided to guard against overheating and misuse of insulation over and around fixture.

### C...Electrical

Integral j-box and low voltage (12V) transformer. 120V input, 12V output. Junction box is U.L. listed for through branch wiring. Includes seven 1/2 trade size knockouts.


### D...Lamp

12V MR16 50 watts max. (not included) Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.

### E...Mounting

Hanger Bars included. Perforated flaps for secure drywall installation.


Ceiling Cut-Out: 5.50"

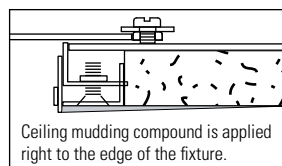

## MINI QUIET CEILING TRIMLESS

**QCM502IC**  
Insulated Ceiling  
Air Tite  
I.C. Housing  
for Round Trim

FOR 12V MR16 50 watts max.

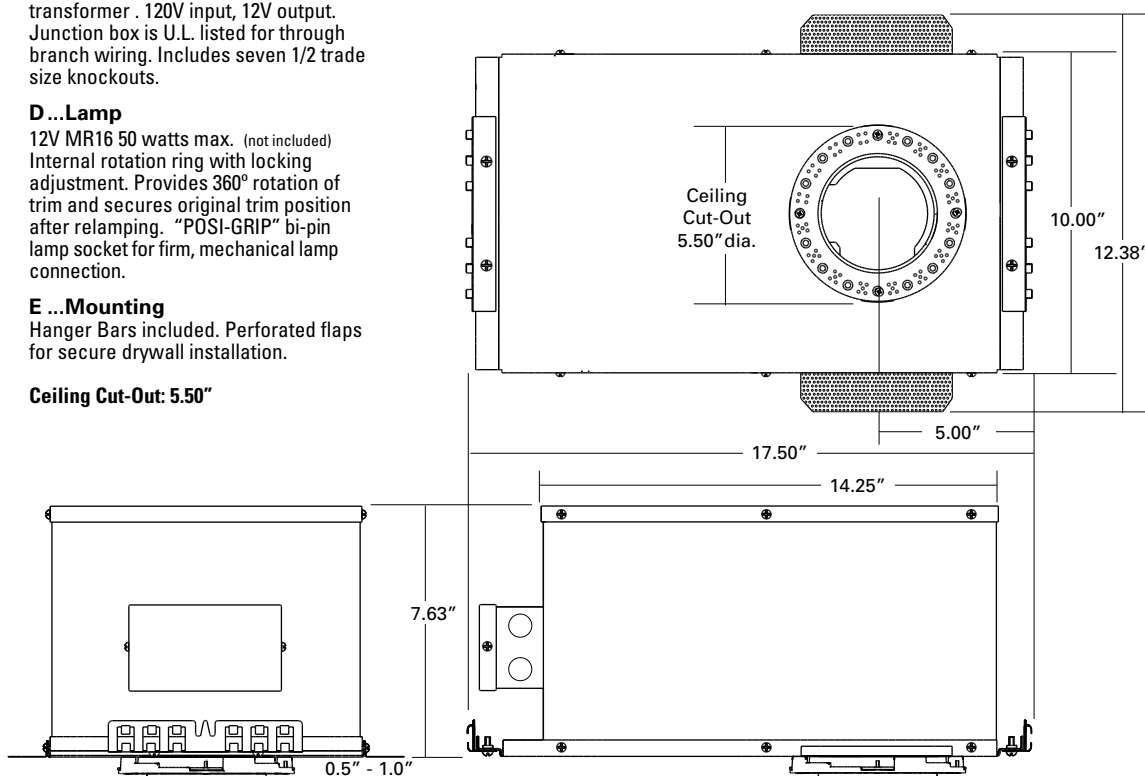

## ORDERING INFORMATION

QCM502IC		
<b>Housing</b> QCM502IC = Mini Quiet Ceiling I.C. Housing for Round Trim w/Integral Transformer	<b>Transformer</b> ELC = Electronic MAG = Magnetic	<b>Voltage</b> 120 = 120 volts primary 277 = 277 volts primary