

DESCRIPTION

New construction special ceiling housing for Mini Quiet Ceiling small aperture square trimless fixtures. (QCM5101, QCM5102, QCM5103, QCM5104).

For new construction non-I.C applications in non-drywall ceilings constructed of special materials such as wood, marble, etc.... Insulation must be kept 3" from all sides and at least 1" above the housing.

Catalog #	Туре
Project	
Comments	Date
Prepared by	

SPECIFICATION FEATURES

A...Housing

Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Plasterframe opening collar is built to accommodate a pre-specified ceiling thickness.

B...System Protection:

Thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation.

C...Electrical

Integral j-box and low voltage (12V) transformer . 120V input, 12V output. Junction box is U.L. listed for through branch wiring. Includes five 1/2 trade size knockouts (six knockouts when magnetic xfmr. is specified)


D...Lamp

12V MR16 50 watts max. (not included) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.

E...Mounting

Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively.

Ceiling Cut-Out: 3.641" sq.




Cut-out in ceiling material must be sized perfectly to the diameter of the plasterframe collar for trimless effect.



MINI QUIET CEILING TRIMLESS

QCM516SP New Construction Housing for Square Trim

Special Ceiling Materials (non-drywall ceilings) FOR 12V MR16 50 watts max.

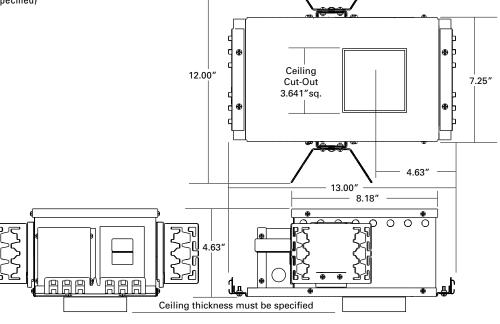



ORDERING INFORMATION

